

Graphs and colorings for answer set programming

Kathrin Konczak and Thomas Linke and Torsten Schaub*

*Institut für Informatik, Universität Potsdam
Postfach 90 03 27, D-14439 Potsdam, Germany
{konczak,linke,torsten}@cs.uni-potsdam.de*

submitted 14 August 2003; revised 22 July 2004; accepted 24 December 2004

Abstract

We investigate the usage of rule dependency graphs and their colorings for characterizing and computing answer sets of logic programs. This approach provides us with insights into the interplay between rules when inducing answer sets. We start with different characterizations of answer sets in terms of totally colored dependency graphs that differ in graph-theoretical aspects. We then develop a series of operational characterizations of answer sets in terms of operators on partial colorings. In analogy to the notion of a derivation in proof theory, our operational characterizations are expressed as (non-deterministically formed) sequences of colorings, turning an uncolored graph into a totally colored one. In this way, we obtain an operational framework in which different combinations of operators result in different formal properties. Among others, we identify the basic strategy employed by the *noMore* system and justify its algorithmic approach. Furthermore, we distinguish operations corresponding to Fitting’s operator as well as to well-founded semantics.

KEYWORDS: answer set programming, operational semantics, answer set computation, graph-based characterization

1 Introduction

Graphs constitute a fundamental tool within computing science, in particular, in programming languages, where graphs are often used for analyzing a program’s behavior. Clearly, this also applies to logic programming. For instance, Prolog’s procedural semantics is intimately connected to the concept of SLD-trees (Lloyd 1987). For further analysis, like profiling, other types of graphs, such as call graphs, play an important role during program development. Similarly, in alternative semantics of logic programming, like *answer set programming* (Gelfond and Lifschitz 1988; Gelfond and Lifschitz 1991), graphs have been used for deciding whether answer sets exist (Fages 1994; Baral and Gelfond 1994).

We take the application of graphs even further and elaborate in this paper upon an approach to using graphs as the underlying computational model for computing answer sets. To this end, we build upon and largely extend the theoretical foundations introduced in (Linke 2001; Anger et al. 2002). Our approach has its roots in default logic (Reiter 1980), where extensions are often characterized through their (unique) set of generating default rules. Accordingly, we are interested in characterizing answer sets by means of their set

* Affiliated with the School of Computing Science at Simon Fraser University, Burnaby, Canada.

of generating rules. For determining whether a rule belongs to this set, we must verify that each positive body atom is derivable and that no negative body atom is derivable. In fact, an atom is derivable if the set of generating rules includes a rule having the atom as its head; or conversely, an atom is not derivable if there is no rule among the generating rules that has the atom as its head. Consequently, the formation of the set of generating rules amounts to resolving positive and negative dependencies among rules. For capturing these dependencies, we take advantage of the concept of a *rule dependency graph*, wherein each node represents a rule of the underlying program and two types of edges stand for the aforementioned positive and negative rule dependencies, respectively.¹ For expressing the applicability status of rules, that is, whether a rule belongs to a set of generating rules or not, we label, or as we say *color*, the respective nodes in the graph. In this way, an answer set can be expressed by a total coloring of the rule dependency graph. Of course, in what follows, we are mainly interested in the inverse, that is, when does a graph coloring correspond to an answer set of the underlying program; and, in particular, how can we compute such a total coloring.

Generally speaking, graphs provide a formal device for making structural properties of an underlying problem explicit. In this guise, we start by identifying graph structures that capture structural properties of logic programs and their answer sets. As a result, we obtain several characterizations of answer sets in terms of totally colored dependency graphs that differ in graph-theoretical aspects. To a turn, we build upon these characterizations in order to develop an operational framework for answer set formation. The idea is to start from an uncolored rule dependency graph and to employ specific operators that turn a partially colored graph gradually into a totally colored one that represents an answer set. This approach is strongly inspired by the concept of a derivation, in particular, by that of an SLD-derivation (Lloyd 1987). Accordingly, a program has a certain answer set iff there is a sequence of operations turning the uncolored graph into a totally colored one that provably corresponds to the answer set.

Our paper is organized as follows. Section 2 briefly summarizes concepts of logic programming. Section 3 lays the formal foundations of our approach by introducing its basic graph-theoretical instruments. While the following Section 4 addresses characterizations of answer sets through totally colored graphs, Section 5 deals with operational characterizations of answer sets. Section 6 identifies relationships with Fitting’s and well-founded semantics. Section 7 discusses the approach, in particular in the light of related work. We conclude our contribution in Section 8. Appendix Appendix A and Appendix B contain auxiliary material, needed in the proofs given in Appendix Appendix C.

2 Definitions and notation

We assume a basic familiarity with alternative semantics of logic programming (Lifschitz 1996). A (normal) *logic program* is a finite set of rules of the form

$$p_0 \leftarrow p_1, \dots, p_m, \text{not } p_{m+1}, \dots, \text{not } p_n, \quad (1)$$

¹ This type of graph was called “block graph” in (Linke 2001).

where $n \geq m \geq 0$, and each p_i ($0 \leq i \leq n$) is an *atom*. The set of all atoms is denoted by Atm . Given a rule r of form (1), we let $head(r)$ denote the *head*, p_0 , of r and $body(r)$ the *body*, $\{p_1, \dots, p_m, \text{not } p_{m+1}, \dots, \text{not } p_n\}$, of r . Furthermore, let $body^+(r) = \{p_1, \dots, p_m\}$ and $body^-(r) = \{p_{m+1}, \dots, p_n\}$. For a program Π , we write $head(\Pi) = \{head(r) \mid r \in \Pi\}$. A program is called *basic* if $body^-(r) = \emptyset$ for all its rules. The *reduct*, Π^X , of a program Π *relative to* a set X of atoms is defined by

$$\Pi^X = \{head(r) \leftarrow body^+(r) \mid r \in \Pi \text{ and } body^-(r) \cap X = \emptyset\}. \quad (2)$$

A set of atoms X is *closed under* a basic program Π if for any $r \in \Pi$, $head(r) \in X$ whenever $body^+(r) \subseteq X$. The smallest set of atoms which is closed under a basic program Π is denoted by $Cn(\Pi)$. With these formalities at hand, we can define *answer set semantics* for logic programs: A set X of atoms is an *answer set* of a program Π if $Cn(\Pi^X) = X$. We use $AS(\Pi)$ for denoting the set of all answer sets of a program Π .

An alternative inductive characterization for operator Cn can be obtained by appeal to an *immediate consequence operator* (Lloyd 1987). Let Π be a basic program and X a set of atoms. The operator T_Π is defined as follows:

$$T_\Pi(X) = \{head(r) \mid r \in \Pi \text{ and } body(r) \subseteq X\}. \quad (3)$$

Iterated applications of T_Π are written as T_Π^j for $j \geq 0$, where $T_\Pi^0(X) = X$ and $T_\Pi^i(X) = T_\Pi(T_\Pi^{i-1}(X))$ for $i \geq 1$. It is well-known that $Cn(\Pi) = \bigcup_{i \geq 0} T_\Pi^i(\emptyset)$, for any basic program Π . Also, for any answer set X of program Π , it holds that $X = \bigcup_{i \geq 0} T_\Pi^i(X)$.

Another important concept is that of the *generating rules* of an answer set. The set $R_\Pi(X)$ of generating rules of a set X of atoms from program Π is defined as

$$R_\Pi(X) = \{r \in \Pi \mid body^+(r) \subseteq X \text{ and } body^-(r) \cap X = \emptyset\}. \quad (4)$$

In fact, one can show that a set of atoms X is an answer set of a program Π iff $X = Cn((R_\Pi(X))^\emptyset)$ (see Theorem Appendix A.2; note that $\Pi^\emptyset = \{head(r) \leftarrow body^+(r) \mid r \in \Pi\}$ for any program Π).

3 Graphs and colorings

This section lays the formal foundations of our approach by introducing its basic graph-theoretical instruments.

A *graph* is a pair (V, E) where V is a set of *vertices* and $E \subseteq V \times V$ a set of (directed) *edges*. A *path* from x to y in (V, E) for $x, y \in V$ is a sequence $x_1, \dots, x_n$ such that $x = x_1, y = x_n, (x_i, x_{i+1}) \in E$ for $1 \leq i < n$, and the elements x_i are pairwise disjoint. A set of edges E contains a cycle if there is a nonempty set $\{x_i \mid i \in \{0, \dots, n\}\}$ of vertices such that $(x_i, x_{i+1}) \in E$ for $i \in \{0, \dots, n-1\}$ and $(x_n, x_0) \in E$. A graph (V, E) is *acyclic* if E contains no cycles. For $W \subseteq V$, we denote $E \cap (W \times W)$ by $E|_W$. Also, we abbreviate the induced subgraph $G = (V \cap W, E|_W)$ of (V, E) by $G|_W$. A *labeled graph* is a graph with an associated labeling function $\ell : E \rightarrow L$ for some set of labels L . In view of our small label set $L = \{0, 1\}$ (see below), we leave ℓ and L implicit and denote such labeled graphs by triples (V, E_0, E_1) , where $E_i = \{e \in E \mid \ell(e) = i\}$ for $i = 0, 1$. An *i-subgraph* of (V, E_0, E_1) is a graph (W, F) such that $W \subseteq V$ and $F \subseteq E_i|_W$ for $i = 0, 1$.

² An *i-path* from x to y in (V, E_0, E_1) is a path from x to y in (V, E_i) for $x, y \in V$ and $i = 0, 1$.

In the context of logic programming, we are interested in graphs reflecting dependencies among rules.

Definition 3.1

Let Π be a logic program.

The rule dependency graph (*RDG*) $\Gamma_\Pi = (\Pi, E_0, E_1)$ of Π is a labeled graph with

$$\begin{aligned} E_0 &= \{(r, r') \mid r, r' \in \Pi, \text{head}(r) \in \text{body}^+(r')\}; \\ E_1 &= \{(r, r') \mid r, r' \in \Pi, \text{head}(r) \in \text{body}^-(r')\}. \end{aligned}$$

We omit the subscript Π from Γ_Π whenever the underlying program is clear from the context. We follow (Papadimitriou and Sideri 1994) in distinguishing between 0- and 1-edges. Observe that several programs may have isomorphic *RDGs*. For example, $\Pi = \{a \leftarrow b, c \leftarrow a\}$ and $\Pi' = \{a \leftarrow, c \leftarrow a\}$ have isomorphic *RDGs*.

Example 1

Consider the logic program $\Pi_1 = \{r_1, \dots, r_6\}$, comprising the following rules:

$$\begin{aligned} r_1 : \quad & p \leftarrow \\ r_2 : \quad & b \leftarrow p \\ r_3 : \quad & f \leftarrow b, \text{not } f' \\ r_4 : \quad & f' \leftarrow p, \text{not } f \\ r_5 : \quad & b \leftarrow m \\ r_6 : \quad & x \leftarrow f, f', \text{not } x \end{aligned}$$

The *RDG* of Π_1 is given as follows:

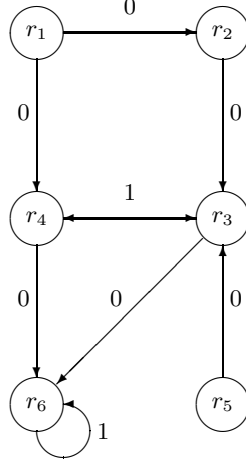
$$\Gamma_{\Pi_1} = (\Pi_1, \{(r_1, r_2), (r_1, r_4), (r_2, r_3), (r_3, r_6), (r_4, r_6), (r_5, r_3)\}, \{(r_3, r_4), (r_4, r_3), (r_6, r_6)\})$$

It is depicted graphically in Figure 1. For instance, $(\{r_1, r_2, r_3, r_4\}, \{(r_1, r_2)\})$ is a 0-subgraph of Γ_{Π_1} and $(\{r_5, r_6\}, \{(r_6, r_6)\})$ is a 1-subgraph of Γ_{Π_1} .

We call C a (*partial*) *coloring* of Γ_Π if C is a partial mapping $C : \Pi \rightarrow \{\oplus, \ominus\}$. We call C a *total* coloring, if C is a total mapping. Intuitively, the colors $\oplus$ and $\ominus$ indicate whether a rule is supposedly applied or blocked, respectively. We sometimes denote the set of all vertices colored with $\oplus$ or $\ominus$ by $C_\oplus$ or $C_\ominus$, respectively. That is, $C_\oplus = \{r \mid C(r) = \oplus\}$ and $C_\ominus = \{r \mid C(r) = \ominus\}$. If C is total, $(C_\oplus, C_\ominus)$ is a binary partition of Π . That is, $\Pi = C_\oplus \cup C_\ominus$ and $C_\oplus \cap C_\ominus = \emptyset$. Accordingly, we often identify a coloring C with the pair $(C_\oplus, C_\ominus)$. A partial coloring C induces a pair $(C_\oplus, C_\ominus)$ of sets such that $C_\oplus \cup C_\ominus \subseteq \Pi$ and $C_\oplus \cap C_\ominus = \emptyset$. For comparing partial colorings, C and C' , we define $C \sqsubseteq C'$, if $C_\oplus \subseteq C'_\oplus$ and $C_\ominus \subseteq C'_\ominus$. The “empty” coloring $(\emptyset, \emptyset)$ is the $\sqsubseteq$ -smallest coloring. Accordingly, we define $C \sqcup C'$ as $(C_\oplus \cup C'_\oplus, C_\ominus \cup C'_\ominus)$.³ We denote the set of all partial colorings of a *RDG* Γ_Π by $\mathbb{C}_{\Gamma_\Pi}$. For readability, we often omit the index Γ_Π and simply write $\mathbb{C}$, whenever this is clear from the context.

² Note that an *i*-subgraph is not an induced graph.

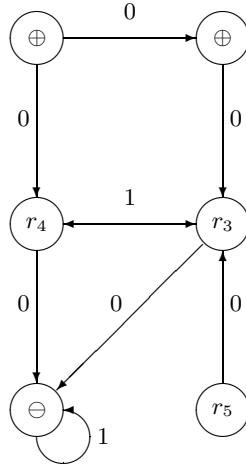
³ We use “squared” relation symbols, like $\sqsubseteq$ or $\sqcup$ when dealing with partial colorings.


 Fig. 1. The *RDG* of logic program Π_1 .

If C is a coloring of Γ_Π , we call the pair (Γ_Π, C) a *colored RDG*. For example, “coloring” the *RDG* of Π_1 from Example 1 with ⁴

$$C_5 = (\{r_1, r_2\}, \{r_6\}) \quad (5)$$

yields the colored graph given in Figure 2. For simplicity, when coloring, we replace the


 Fig. 2. The (partially) colored *RDG* (Γ_{Π_1}, C_5) .

label of a node by the respective color. (Cf. Figure 1 for the underlying uncolored graph.) Observe that our conception of coloring is nonstandard insofar that adjacent vertices may be colored with the same color. We are sometimes interested in the subgraph $\Gamma_\Pi|_{C_\oplus \cup C_\ominus}$

⁴ For the sake of uniqueness, we label the coloring with the equation number.

induced by the colored nodes. Restricting Γ_{Π_1} to the nodes colored in Figure 2, yields the RDG $(\{r_1, r_2, r_6\}, \{(r_1, r_2)\}, \{(r_6, r_6)\})$.

The central question addressed in this paper is how to characterize and compute the total colorings of $RDGs$ that correspond to the answer sets of an underlying program. In fact, the colorings of interest can be distinguished in a straightforward way. Let Π be a logic program along with its RDG Γ . Then, for every answer set X of Π , define an *admissible coloring*⁵ C of Γ as

$$C = (R_{\Pi}(X), \Pi \setminus R_{\Pi}(X)). \quad (6)$$

By way of the respective generating rules, we associate with any program a set of admissible colorings whose members are in one-to-one correspondence with its answer sets. Any admissible coloring is total; furthermore, we have $X = head(C_{\oplus})$. We use $AC(\Pi)$ for denoting the set of all admissible colorings of a RDG Γ_{Π} .

For a partial coloring C , we define $AC_{\Pi}(C)$ as the set of all admissible colorings of Γ_{Π} compatible with C . Formally, given the RDG Γ of a logic program Π and a partial coloring C of Γ , define

$$AC_{\Pi}(C) = \{C' \in AC(\Pi) \mid C \sqsubseteq C'\}. \quad (7)$$

Clearly, $C_1 \sqsubseteq C_2$ implies $AC_{\Pi}(C_1) \supseteq AC_{\Pi}(C_2)$. Observe also that a partial coloring C is extensible to an admissible one C' , that is, $C \sqsubseteq C'$, iff $AC_{\Pi}(C)$ is non-empty. For a total coloring C , $AC_{\Pi}(C)$ is either empty or singleton. Regarding program Π_1 and coloring C_5 , we get $AC_{\Pi_1}(C_5) = AC(\Pi_1) = \{(\{r_1, r_2, r_3\}, \{r_4, r_5, r_6\}), (\{r_1, r_2, r_4\}, \{r_3, r_5, r_6\})\}$ (see also Figure 5 below).

Accordingly, we define $AS_{\Pi}(C)$ as the set of all answer sets X of Π compatible with partial coloring C .

$$AS_{\Pi}(C) = \{X \in AS(\Pi) \mid C_{\oplus} \subseteq R_{\Pi}(X) \text{ and } C_{\ominus} \cap R_{\Pi}(X) = \emptyset\}. \quad (8)$$

Note that $head(C_{\oplus}) \subseteq X$ for any answer set $X \in AS_{\Pi}(C)$ (cf. Theorem Appendix A.4). Otherwise, similar considerations apply to $AS_{\Pi}(C)$ as made above for $AC_{\Pi}(C)$. As regards program Π_1 and coloring C_5 , we get $AS_{\Pi_1}(C_5) = AS(\Pi_1) = \{\{b, p, f\}, \{b, p, f'\}\}$. It is noteworthy that due to the one-to-one correspondence between $AS_{\Pi}(C)$ and $AC_{\Pi}(C)$ (cf. Theorem Appendix A.1), one can replace one by the other in most subsequent results. Often it is simply a matter of simplicity which formulation is used.

We need the following concepts for describing a rule's status of applicability in a colored RDG .

Definition 3.2

Let $\Gamma = (\Pi, E_0, E_1)$ be the RDG of logic program Π and C be a partial coloring of Γ .

For $r \in \Pi$, we define:

1. r is supported in (Γ, C) , if $body^+(r) \subseteq \{head(r') \mid (r', r) \in E_0, r' \in C_{\oplus}\}$;
2. r is unsupported in (Γ, C) , if $\{r' \mid (r', r) \in E_0, head(r') = q\} \subseteq C_{\ominus}$ for some $q \in body^+(r)$;

⁵ The term “admissible coloring” was coined in (Brignoli et al. 1999); they were referred to as “application colorings” in (Linke 2001). Note that both colorings concepts are originally defined in purely graph-theoretical terms. Here, we simply adopt this term for distinguishing colorings corresponding to answer sets of an underlying program (cf. Section 7).

3. r is blocked in (Γ, C) , if $r' \in C_{\oplus}$ for some $(r', r) \in E_1$;
4. r is unblocked in (Γ, C) , if $r' \in C_{\ominus}$ for all $(r', r) \in E_1$.

For r and r' as given in Condition 3, we say that r is blocked by r' . Whenever C is total, a rule is unsupported or unblocked iff it is not supported or not blocked, respectively. Note that the qualification $(r', r) \in E_0$ could be safely removed from Condition 1 and 2; we left it in for stressing the symmetry among the first two and the last two conditions. Observe that all four properties are decidable by looking at the immediate predecessors in the graph. With a slightly extended graph structure, they can be expressed in purely graph-theoretical terms, without any reference to the heads and bodies of the underlying rules.⁶

For convenience, let us introduce the following sets of rules.

Definition 3.3

Let Γ be the *RDG* of logic program Π and C be a partial coloring of Γ .

We define

1. $S(\Gamma, C) = \{r \in \Pi \mid r \text{ is supported in } (\Gamma, C)\}$;
2. $\overline{S}(\Gamma, C) = \{r \in \Pi \mid r \text{ is unsupported in } (\Gamma, C)\}$;
3. $B(\Gamma, C) = \{r \in \Pi \mid r \text{ is blocked in } (\Gamma, C)\}$;
4. $\overline{B}(\Gamma, C) = \{r \in \Pi \mid r \text{ is unblocked in } (\Gamma, C)\}$.

For a total coloring C , we have $\overline{S}(\Gamma, C) = \Pi \setminus S(\Gamma, C)$ and $\overline{B}(\Gamma, C) = \Pi \setminus B(\Gamma, C)$. Furthermore, $S(\Gamma, C)$ and $\overline{S}(\Gamma, C)$ as well as $B(\Gamma, C)$ and $\overline{B}(\Gamma, C)$, respectively, are disjoint.

For illustration, consider the sets obtained regarding the colored *RDG* (Γ_{Π_1}, C_5) , given in Figure 2.

$$\begin{aligned} S(\Gamma_{\Pi_1}, C_5) &= \{r_1, r_2, r_3, r_4\} & \overline{S}(\Gamma_{\Pi_1}, C_5) &= \{r_5\} \\ B(\Gamma_{\Pi_1}, C_5) &= \emptyset & \overline{B}(\Gamma_{\Pi_1}, C_5) &= \{r_1, r_2, r_5, r_6\} \end{aligned} \quad (9)$$

The following theorem shows the correspondence between properties of rules in a logic program and properties of vertices of a *RDG*, in the presence of an existing answer set.

Theorem 3.1

Let Γ be the *RDG* of logic program Π , C be a partial coloring of Γ and $X \in AS_{\Pi}(C)$.

For $r \in \Pi$, we have

1. $body^+(r) \subseteq X$, if $r \in S(\Gamma, C)$;
2. $body^+(r) \not\subseteq X$, if $r \in \overline{S}(\Gamma, C)$;
3. $body^-(r) \cap X \neq \emptyset$, if $r \in B(\Gamma, C)$;
4. $body^-(r) \cap X = \emptyset$, if $r \in \overline{B}(\Gamma, C)$.

For admissible colorings, we may turn the above “if” statements into “iff”.

⁶ For details on these pure graph-theoretical characterization, we refer the reader to a companion paper (Linke et al. 2002), dealing with the system *noMoRe*.

Corollary 3.2

Let Γ be the *RDG* of logic program Π , C be an admissible coloring of Γ and $\{X\} = AS_{\Pi}(C)$.

For $r \in \Pi$, we have

1. $body^+(r) \subseteq X$ iff $r \in S(\Gamma, C)$;
2. $body^+(r) \not\subseteq X$ iff $r \in \overline{S}(\Gamma, C)$;
3. $body^-(r) \cap X \neq \emptyset$ iff $r \in B(\Gamma, C)$;
4. $body^-(r) \cap X = \emptyset$ iff $r \in \overline{B}(\Gamma, C)$.

The next results are important for understanding the idea of our approach.

Theorem 3.3

Let Γ be the *RDG* of logic program Π and C be a partial coloring of Γ .

Then, for every $X \in AS_{\Pi}(C)$ we have that

1. $S(\Gamma, C) \cap \overline{B}(\Gamma, C) \subseteq R_{\Pi}(X)$;
2. $\overline{S}(\Gamma, C) \cup B(\Gamma, C) \subseteq \Pi \setminus R_{\Pi}(X)$.

If C is admissible, we have for $\{X\} = AS_{\Pi}(C)$ that

3. $S(\Gamma, C) \cap \overline{B}(\Gamma, C) = R_{\Pi}(X)$;
4. $\overline{S}(\Gamma, C) \cup B(\Gamma, C) = \Pi \setminus R_{\Pi}(X)$.

In fact, the last two equations are equivalent since C is total. Each of them can be understood as a necessary yet insufficient condition for characterizing answer sets. We elaborate upon sufficient graph-theoretical conditions in the next section.

Let us reconsider the partially colored *RDG* (Γ_{Π_1}, C_5) in Figure 2. For every $X \in AS_{\Pi_1}(C_5) = \{\{b, p, f\}, \{b, p, f'\}\}$, we have

$$\begin{aligned}
 S(\Gamma_{\Pi_1}, C_5) \cap \overline{B}(\Gamma_{\Pi_1}, C_5) &= \{r_1, r_2, r_3, r_4\} \cap \{r_1, r_2, r_5, r_6\} \\
 &= \{r_1, r_2\} \\
 &\subseteq R_{\Pi_1}(X); \\
 \overline{S}(\Gamma_{\Pi_1}, C_5) \cup B(\Gamma_{\Pi_1}, C_5) &= \{r_5\} \cup \emptyset \\
 &= \{r_5\} \\
 &\subseteq \Pi \setminus R_{\Pi_1}(X).
 \end{aligned}$$

Regarding $\Pi = \{a \leftarrow not\ a\}$, it is instructive to observe the instance of Condition 3 in Theorem 3.3 for total coloring $C = (\{a \leftarrow not\ a\}, \emptyset)$ and set $X = \{a\}$:

$$S(\Gamma_{\Pi}, C) \cap \overline{B}(\Gamma_{\Pi}, C) = \{a \leftarrow not\ a\} \cap \emptyset = R_{\Pi}(X).$$

This demonstrates that Condition 3 is insufficient for characterizing answer sets. In fact, observe that $C_{\oplus} \neq S(\Gamma_{\Pi}, C) \cap \overline{B}(\Gamma_{\Pi}, C)$.

4 Deciding answer setship from colored graphs

The result given in Theorem 3.3 started from an existing answer set induced from a given coloring. We now develop concepts that allow us to decide whether a (total) coloring represents an answer set by purely graph-theoretical means.

4.1 Graph-based characterization

To begin with, we define a graph structure accounting for the notion of recursive support.

Definition 4.1

Let Γ be the *RDG* of logic program Π .

We define a support graph of Γ as an acyclic 0-subgraph (V, E) of Γ such that $body^+(r) \subseteq \{head(r') \mid (r', r) \in E\}$ for all $r \in V$.

Intuitively, support graphs constitute the graph-theoretical counterpart of operator Cn . That is, a support graph comprises dependencies among heads and positive bodies on which potential applications of the T_Π operator rely.

Example 2

Consider program Π_2 consisting of rules

$$\begin{aligned} r_1 : \quad a &\leftarrow \\ r_2 : \quad b &\leftarrow not\ a \\ r_3 : \quad c &\leftarrow b \\ r_4 : \quad b &\leftarrow c. \end{aligned}$$

Among others, the *RDG* of Π_2 has support graphs $(\emptyset, \emptyset)$, $(\{r_1, r_2\}, \emptyset)$, $(\{r_2, r_3\}, \{(r_2, r_3)\})$, and $(\Pi_2, \{(r_2, r_3), (r_3, r_4)\})$.

Observe that the empty graph $(\emptyset, \emptyset)$ is a support graph of any (uncolored) graph. Self-supportedness is avoided due to the acyclicity of support graphs. $(\Pi_2, \{(r_4, r_3), (r_3, r_4)\})$ is cyclic and hence no support graph.

Every *RDG* has a unique support graph possessing a largest set of vertices.

Theorem 4.1

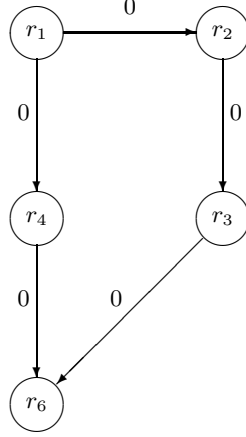
Let Γ be the *RDG* of logic program Π .

Then, there exists a support graph (V, E) of Γ such that $V' \subseteq V$ for all support graphs (V', E') of Γ .

For simplicity, we refer to such support graphs as *maximal support graphs*; all of them share the same set of vertices. This set of vertices corresponds to the generating rules of $Cn(\Pi^\emptyset)$. Different maximal support graphs comprise different sets of edges, reflecting the intuition that atoms may be derivable in different ways. Given that the empty graph is a support graph of any (uncolored) graph, there is always a maximal support graph.

For example, the maximal support graph of the *RDG* of logic program Π_1 , given in Figure 1, is depicted in Figure 3. The latter contains except for (r_5, r_3) all 0-edges of the former, viz. (Γ_{Π_1}, C_5) ; also r_5 is excluded since it cannot be supported (recursively). The only maximal support graph of Γ_{Π_2} is $(\Pi_2, \{(r_2, r_3), (r_3, r_4)\})$ (cf. Example 2). Extending Π_2 by $r_5 : b \leftarrow$ yields three maximal support graphs $(\Pi_2 \cup \{r_5\}, \{(r_2, r_3), (r_3, r_4)\})$, $(\Pi_2 \cup \{r_5\}, \{(r_5, r_3), (r_3, r_4)\})$, and $(\Pi_2 \cup \{r_5\}, \{(r_2, r_3), (r_5, r_3), (r_3, r_4)\})$. All of them share the same set of vertices but differ in the set of edges.

The concept of a support graph is extended to colored graphs in the following way.

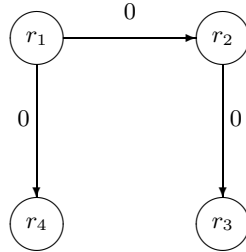
Fig. 3. The maximal support graph of Γ_{Π_1} .**Definition 4.2**

Let Γ be the RDG of logic program Π and C be a partial coloring of Γ .

We define a support graph of (Γ, C) as a support graph (V, E) of Γ such that $C_{\oplus} \subseteq V$ and $C_{\ominus} \cap V = \emptyset$ for some $E \subseteq (\Pi \times \Pi)$.

Recall that E consists of 0-arcs only. Also, note that Definition 4.1 and 4.2 coincide whenever C is the empty coloring. In general, the support graphs of (Γ, C) are exactly those support graphs of Γ whose vertex set includes $C_{\oplus}$ and excludes $C_{\ominus}$. Intuitively, a support graph of a *colored RDG* (Γ, C) takes the applicability status of the rules expressed by C into account. That is, it contains all rules whose positive body is derivable, given that all rules in $C_{\oplus}$ are applicable and all rules in $C_{\ominus}$ are inapplicable.

For example, the maximal support graph of the colored RDG (Γ_{Π_1}, C_5) , given in Figure 2, is depicted in Figure 4. The latter must include all positively colored and exclude all negatively colored nodes of the former. Given program Π_2 from Example 2, a “bad”

Fig. 4. The maximal support graph of (Γ_{Π_1}, C_5) .

coloring, like $C = (\{b \leftarrow c\}, \{b \leftarrow \text{not } a\})$, may deny the existence of a support graph of (Γ, C) .

Given an arbitrary coloring C , there is a priori no relationship among the set of rules supported by a colored graph, viz. $S(\Gamma, C)$, and its support graphs. To see this, consider

the support graph Γ_{Π_2} of program Π_2 along with coloring $C = (\{r_1, r_3, r_4\}, \{r_2\})$. While we have $S(\Gamma_{\Pi_2}, C) = \Pi_2$, there is no support graph of (Γ_{Π_2}, C) . For one thing, a support graph is denied since r_3 and r_4 form a circular support. For another thing, r_2 is always supported, no matter which coloring is considered, whereas it cannot belong to a support graph once it is blocked (ie. colored with $\ominus$). This illustrates two things. First, support graphs provide a global, recursive structure tracing the support of a rule over 0-paths back to rules with empty positive bodies. Unlike this, $S(\Gamma, C)$ relies only on 0-edges, capturing thus a rather local notion of support. Second, support graphs take the complete applicability status expressed by a coloring into account. Unlike this, $S(\Gamma, C)$ may contain putatively blocked rules from $C_\ominus$.

As above, we distinguish maximal support graphs of colored graphs through their maximal set of vertices.

For colored graphs, we have the following conditions guaranteeing the existence of (maximal) support graphs.

Theorem 4.2

Let Γ be the *RDG* of logic program Π and C be a partial coloring of Γ .

Then, there is a (maximal) support graph of (Γ, C) , if one of the following conditions holds.

1. $AC_\Pi(C) \neq \emptyset$;
2. $(C_\oplus, E)$ is a support graph of $\Gamma|_{C_\oplus \cup C_\ominus}$ for some $E \subseteq (\Pi \times \Pi)$.

The existence of a support graph implies the existence of a maximal one. This is why we put maximal in parentheses in the preamble of Theorem 4.2.

As with Property 3 or 4 in Theorem 3.3, respectively, the existence of a support graph can be understood as a necessary condition for characterizing answer sets:

Corollary 4.3

Let Γ be the *RDG* of logic program Π and C be an admissible coloring of Γ .

Then, $(C_\oplus, E)$ is a support graph of (Γ, C) for some $E \subseteq (\Pi \times \Pi)$.

In fact, taken the last result together with Property 3 or 4 in Theorem 3.3, respectively, we obtain a sufficient characterization of admissible colorings (along with their underlying answer sets).

Theorem 4.4 (Answer set characterization, I)

Let Γ be the *RDG* of logic program Π and let C be a total coloring of Γ .

Then, the following statements are equivalent.

1. C is an admissible coloring of Γ ;
2. $C_\oplus = S(\Gamma, C) \cap \overline{B}(\Gamma, C)$ and there is a support graph of (Γ, C) ;
3. $C_\ominus = \overline{S}(\Gamma, C) \cup B(\Gamma, C)$ and there is a support graph of (Γ, C) .

Interestingly, this characterization shows that once we have established a support graph, it doesn't matter whether we focus exclusively on the applicable (as in Statement 2.) or on the inapplicable rules (as in 3.) for characterizing admissible colorings. In both cases, $C_\oplus$ provides the vertices of the maximal support graphs.

For illustration, let us consider the two admissible colorings of $RDG \Gamma_{\Pi_1}$, corresponding to the two answer sets of program Π_1 (given in Example 1):

$$C_{10} = (\{r_1, r_2, r_3\}, \{r_4, r_5, r_6\}); \quad (10)$$

$$C_{11} = (\{r_1, r_2, r_4\}, \{r_3, r_5, r_6\}). \quad (11)$$

The resulting colored $RDGs$ are depicted in Figure 5. (Cf. Figure 1 on Page 5 for the

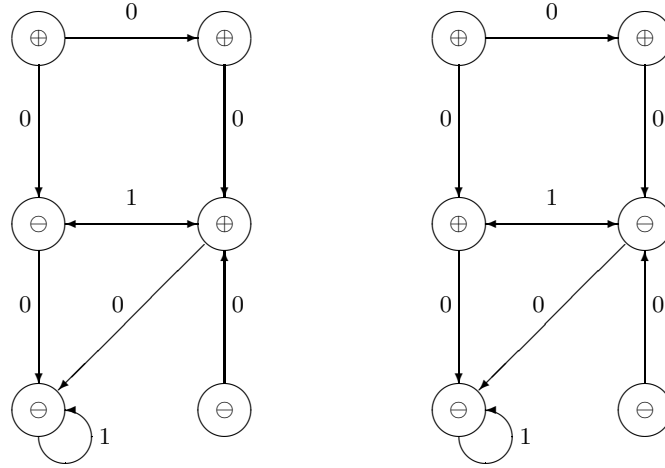


Fig. 5. The totally colored $RDGs$ (Γ_{Π_1}, C_{10}) and (Γ_{Π_1}, C_{11}) .

underlying uncolored graph.) Let us detail the case of C_{10} . We get:

$$\begin{aligned} S(\Gamma_{\Pi_1}, C_{10}) \cap \overline{B}(\Gamma_{\Pi_1}, C_{10}) &= \{r_1, r_2, r_3, r_4\} \cap \{r_1, r_2, r_3, r_5, r_6\} \\ &= \{r_1, r_2, r_3\} \\ &= (C_{10})_{\oplus}; \\ \overline{S}(\Gamma_{\Pi_1}, C_{10}) \cup B(\Gamma_{\Pi_1}, C_{10}) &= \{r_5, r_6\} \cup \{r_4\} \\ &= \{r_4, r_5, r_6\} \\ &= (C_{10})_{\ominus}. \end{aligned}$$

The maximal support graph of (Γ_{Π_1}, C_{10}) is given by $((C_{10})_{\oplus}, \{(r_1, r_2), (r_2, r_3)\})$; it is depicted below in Figure 6.

4.2 Capturing original concepts

It is interesting to see how the original definition of an answer set X , that is, $X = Cn(\Pi^X)$, along with its underlying constructions, viz. reduction Π^X and the Cn operator, can be captured within our graph-based setting.

Clearly, Π^X amounts to the set of unblocked rules.

Theorem 4.5

Let Γ be the RDG of logic program Π .

Furthermore, let C be a total coloring of Γ and X be a set of atoms such that $X = head(C_{\oplus})$.

Then, $head(r) \leftarrow body^+(r) \in \Pi^X$ iff $r \in \overline{B}(\Gamma, C)$ for $r \in \Pi$.

The next result fixes the relationship of maximal support graphs to the consequence operator of basic programs.

Theorem 4.6

Let Γ be the *RDG* of logic program Π and C be a partial coloring of Γ .

If (V, E) is a maximal support graph of (Γ, C) , then $head(V) = Cn((\Pi \setminus C_\ominus)^\emptyset)$.

For the “empty” coloring $C = (\emptyset, \emptyset)$, we have $head(V) = Cn(\Pi^\emptyset)$.

Taking the graph-theoretical counterparts of the reduct Π^X and the Cn operator yields the following graph-theoretical characterization of answer sets:

Theorem 4.7 (Answer set characterization, Π)

Let Γ be the *RDG* of logic program Π and let C be a total coloring of Γ .

Then, C is an admissible coloring of Γ iff $(C_\oplus, E)$ is a maximal support graph of $\Gamma|_{\overline{B}(\Gamma, C)}$ for some $E \subseteq (\Pi \times \Pi)$.

Recall that $\Gamma|_{\overline{B}(\Gamma, C)}$ is the restriction of Γ to the set of unblocked rules in (Γ, C) .⁷ In view of Theorem 4.5, the graph $\Gamma|_{\overline{B}(\Gamma, C)}$ amounts to a reduced (basic) program Π^X whose closure $Cn(\Pi^X)$ is characterized by means of a maximal support graph (cf. Theorem 4.6).

4.3 Subgraph-based characterization

Using “unblocked” rules as done in the previous characterization, refers only implicitly to the blockage relations expressed by 1-edges. In analogy to Definition 4.1, this structure can be made explicit by the notion of a *blockage graph*. For this, we use π_2 for projecting the second argument of a relation.⁸

Definition 4.3

Let Γ be the *RDG* of logic program Π and C be a partial coloring of Γ .

We define a blockage graph of (Γ, C) as a 1-subgraph (V, E) of Γ such that

1. $E \cap (C_\oplus \times C_\oplus) = \emptyset$;
2. $\pi_2(E \cap (C_\oplus \times C_\ominus)) = C_\ominus \cap V$.

In other words, the first condition says that there is no $(r, r') \in E$ such that $r, r' \in C_\oplus$, while the second one stipulates that for all $r \in C_\ominus \cap V$ there exists an $r' \in C_\oplus$ such that $(r', r) \in E$.

Let us briefly compare the definitions of support and blockage graphs. Support graphs capture a recursive concept, stipulating that 0-edges are contained in 0-paths, tracing the support of rules back to rules with empty positive body. Unlike this, blockage graphs aim at characterizing rather local dependencies, based on 1-edge-wise constraints. That is, while the acyclicity of a support graph cannot be checked locally, we may verify whether a graph is a blockage graph by inspecting one of its 1-edges after the other.

Together, both concepts provide the following characterization of answer sets.

⁷ In fact, $\Gamma|_{\overline{B}(\Gamma, C)}$ could be replaced in Theorem 4.7 by $\Gamma|_{S(\Gamma, C) \cap \overline{B}(\Gamma, C)}$ without changing its validity.

⁸ That is, $\pi_2(R) = \{r_2 \mid (r_1, r_2) \in R\}$ for a binary relation R .

Theorem 4.8 (Answer set characterization, III)

Let $\Gamma = (\Pi, E_0, E_1)$ be the RDG of logic program Π and let C be a total coloring of Γ .

Then, C is an admissible coloring of Γ iff

1. there is some support graph of (Γ, C) and
2. $(S(\Gamma, C), E_1|_{S(\Gamma, C)})$ is a blockage graph of (Γ, C) .

Observe that $(C_\oplus, E)$ is a support graph of (Γ, C) for some $E \subseteq \Pi \times \Pi$. Condition 2 stipulates, among other things, that all supported yet inapplicable rules are properly blocked (cf. Condition 2 in Definition 4.3). The restriction to supported rules is necessary in order to eliminate rules that are inapplicable since they are unsupported. Note that the blockage graph in Condition 2 can also be written as $(C_\oplus \cup C_\ominus, E_1)|_{S(\Gamma, C)}$. For example, the support and the blockage graph of the colored RDG (Γ_{Π_1}, C_{10}) , given on the left hand side in Figure 5, are depicted in Figure 6. This figure nicely illustrates the subset relationship

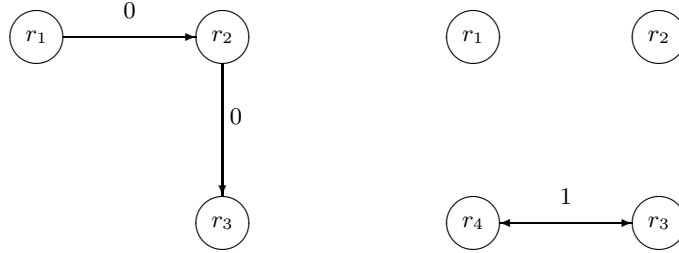


Fig. 6. Support and blockage graph of (Γ_{Π_1}, C_{10}) .

between the vertices of the support and the blockage graph.

Without explicit mention of the blockage graph, a similar characterization can be given in the following way.

Corollary 4.9 (Answer set characterization, III')

Let $\Gamma = (\Pi, E_0, E_1)$ be the RDG of logic program Π and let C be a total coloring of Γ .

Then, C is an admissible coloring of Γ iff the following conditions hold.

1. $(C_\oplus, E)$ is a support graph of (Γ, C) for some $E \subseteq \Pi \times \Pi$;
2. for all $r \in (C_\ominus \cap S(\Gamma, C))$ there exists an $r' \in C_\oplus$ such that $(r', r) \in E_1$;
3. for all $r, r' \in C_\oplus$ we have $(r, r') \notin E_1$.

5 Operational characterizations

The goal of this section is to provide an operational characterization of answer sets, based on the concepts introduced in the last section. The idea is to start with the “empty” coloring $(\emptyset, \emptyset)$ and to successively apply operators that turn a partial coloring C into another one C' such that $C \subseteq C'$. This is done until finally an admissible coloring, yielding an answer set, is obtained.

5.1 Deterministic operators

We concentrate first on operations extending partial colorings in a deterministic way.

Definition 5.1

Let Γ be the *RDG* of logic program Π and C be a partial coloring of Γ .

Then, define $\mathcal{P}_\Gamma : \mathbb{C} \rightarrow \mathbb{C}$ as $\mathcal{P}_\Gamma(C) = C \sqcup (S(\Gamma, C) \cap \overline{B}(\Gamma, C), \overline{S}(\Gamma, C) \cup B(\Gamma, C))$.

A partial coloring C is closed under $\mathcal{P}_\Gamma$, if $C = \mathcal{P}_\Gamma(C)$. Note that $\mathcal{P}_\Gamma(C)$ does not always exist. To see this, observe that $\mathcal{P}_\Gamma(\{\{a \leftarrow \text{not } a\}, \emptyset\})$ would be $(\{a \leftarrow \text{not } a\}, \{a \leftarrow \text{not } a\})$, which is no mapping and thus no partial coloring. Interestingly, $\mathcal{P}_\Gamma$ exists on colorings expressing answer sets.

Theorem 5.1

Let Γ be the *RDG* of logic program Π and C a partial coloring of Γ .

If $AC_\Pi(C) \neq \emptyset$, then $\mathcal{P}_\Gamma(C)$ exists.

Note that $\mathcal{P}_\Gamma(C)$ may exist although $AC_\Pi(C) = \emptyset$.⁹ To see this, consider the program $\Pi = \{a \leftarrow c \leftarrow a, \text{not } c\}$. Clearly, $AS(\Pi) = \emptyset$. However, $\mathcal{P}_\Gamma((\emptyset, \emptyset)) = (\{a \leftarrow\}, \emptyset)$ exists.

Now, we can define our principal propagation operator in the following way.

Definition 5.2

Let Γ be the *RDG* of logic program Π and C a partial coloring of Γ .

Then, define $\mathcal{P}_\Gamma^* : \mathbb{C} \rightarrow \mathbb{C}$ where $\mathcal{P}_\Gamma^*(C)$ is the $\sqsubseteq$ -smallest partial coloring containing C and being closed under $\mathcal{P}_\Gamma$.

Essentially, $\mathcal{P}_\Gamma^*(C)$ amounts to computing the “immediate consequences” from a given partial coloring C .¹⁰

Also, like $\mathcal{P}_\Gamma(C)$, $\mathcal{P}_\Gamma^*(C)$ is not necessarily defined. This situation is made precise next.

Theorem 5.2

Let Γ be the *RDG* of logic program Π and C a partial coloring of Γ .

If $AC_\Pi(C) \neq \emptyset$, then $\mathcal{P}_\Gamma^*(C)$ exists.

Under the previous conditions, we may actually characterize $\mathcal{P}_\Gamma^*$ in terms of iterated applications of $\mathcal{P}_\Gamma$; this is detailed in Appendix B and used in the proofs. In fact, the non-existence of $\mathcal{P}_\Gamma^*$ is an important feature since an undefined application of $\mathcal{P}_\Gamma^*$ amounts to a backtracking situation at the implementation level. Note that $\mathcal{P}_\Gamma^*((\emptyset, \emptyset))$ always exists, even though we may have $AC_\Pi((\emptyset, \emptyset)) = \emptyset$ (because of $AS(\Pi) = \emptyset$).

We have the following result.

Corollary 5.3

Let Γ be the *RDG* of logic program Π . Then, $\mathcal{P}_\Gamma^*((\emptyset, \emptyset))$ exists.

⁹ Since our goal is to compute members of $AC_\Gamma(C)$, the precondition $AC_\Pi(C) \neq \emptyset$ is sufficient for our purposes. It remains future work to identify a necessary *and* sufficient condition guaranteeing the existence of $\mathcal{P}_\Gamma(C)$.

¹⁰ In Section 6, this is related to Fitting’s semantics.

For illustration, consider program Π_1 in Example 1. We get:

$$\begin{aligned}
 \mathcal{P}_\Gamma((\emptyset, \emptyset)) &= (\emptyset, \emptyset) \sqcup (\{r_1\} \cap \{r_1, r_2, r_5\}, \{r_5\} \cup \emptyset) \\
 &= (\{r_1\}, \{r_5\}) \\
 \mathcal{P}_\Gamma((\{r_1\}, \{r_5\})) &= (\{r_1\}, \{r_5\}) \sqcup (\{r_1, r_2, r_4\} \cap \{r_1, r_2, r_5\}, \{r_5\} \cup \emptyset) \\
 &= (\{r_1, r_2\}, \{r_5\}) \\
 \mathcal{P}_\Gamma((\{r_1, r_2\}, \{r_5\})) &= (\{r_1, r_2\}, \{r_5\}) \sqcup (\{r_1, r_2, r_3, r_4\} \cap \{r_1, r_2, r_5\}, \{r_5\} \cup \emptyset) \\
 &= (\{r_1, r_2\}, \{r_5\})
 \end{aligned}$$

Hence, we obtain

$$\mathcal{P}_\Gamma^*((\emptyset, \emptyset)) = (\{r_1, r_2\}, \{r_5\}).$$

Let us now elaborate more upon the formal properties of $\mathcal{P}_\Gamma$ and $\mathcal{P}_\Gamma^*$. First, we observe that both are reflexive, that is, $C \sqsubseteq \mathcal{P}_\Gamma(C)$ and $C \sqsubseteq \mathcal{P}_\Gamma^*(C)$ (provided that $\mathcal{P}_\Gamma(C)$ and $\mathcal{P}_\Gamma^*(C)$ exists). Furthermore, both operators are monotonic in the following sense.

Theorem 5.4

Let Γ be the RDG of logic program Π and let C and C' be partial colorings of Γ such that $AC_\Pi(C') \neq \emptyset$.

1. If $C \sqsubseteq C'$, then $\mathcal{P}_\Gamma(C) \sqsubseteq \mathcal{P}_\Gamma(C')$;
2. If $C \sqsubseteq C'$, then $\mathcal{P}_\Gamma^*(C) \sqsubseteq \mathcal{P}_\Gamma^*(C')$.

Given that $\mathcal{P}_\Gamma$ is reflexive, the last result implies that $C \sqsubseteq \mathcal{P}_\Gamma(C) \sqsubseteq \mathcal{P}_\Gamma(\mathcal{P}_\Gamma(C))$ whenever $AC_\Pi(C) \neq \emptyset$. In addition, $\mathcal{P}_\Gamma^*$ clearly enjoys a restricted idempotency property, that is, $\mathcal{P}_\Gamma^*(C) = \mathcal{P}_\Gamma^*(\mathcal{P}_\Gamma^*(C))$ provided that $AC_\Pi(C) \neq \emptyset$.

Our next result shows that $\mathcal{P}_\Gamma$ and $\mathcal{P}_\Gamma^*$ are answer set preserving.

Theorem 5.5

Let Γ be the RDG of logic program Π and C be a partial coloring of Γ .

Then, we have

1. $AC_\Pi(C) = AC_\Pi(\mathcal{P}_\Gamma(C))$;
2. $AC_\Pi(C) = AC_\Pi(\mathcal{P}_\Gamma^*(C))$.

That is, $X \in AS_\Pi(C)$ iff $X \in AS_\Pi(\mathcal{P}_\Gamma(C))$ iff $X \in AS_\Pi(\mathcal{P}_\Gamma^*(C))$.

A similar result holds for the underlying support and blockage graphs.

Theorem 5.6

Let $\Gamma = (\Pi, E_0, E_1)$ be the RDG of logic program Π and C be a partial coloring of Γ .

For $C' = \mathcal{P}_\Gamma^*(C)$, we have

1. if $(C_\oplus, E)$ is a support graph of (Γ, C) , then $(C'_\oplus, E')$ is a support graph of (Γ, C') for some $E, E' \subseteq E_0$;
2. if $(C_\oplus \cup C_\ominus, E_1)|_{S(\Gamma, C)}$ is a blockage graph of (Γ, C) and $C_\oplus \subseteq S(\Gamma, C)$, then $(C'_\oplus \cup C'_\ominus, E_1)|_{S(\Gamma, C')}$ is a blockage graph of (Γ, C') .

A similar result can be shown for $\mathcal{P}_\Gamma$.

Finally, $\mathcal{P}_\Gamma$ can be used for deciding answersetship in the following way.

Corollary 5.7 (Answer set characterization, I')

Let Γ be the *RDG* of logic program Π and let C be a total coloring of Γ .

Then, C is an admissible coloring of Γ iff $\mathcal{P}_\Gamma(C) = C$ and there is a support graph of (Γ, C) .

This result directly follows from Theorem 4.4. Clearly, the result is also valid when replacing $\mathcal{P}_\Gamma$ by $\mathcal{P}_\Gamma^*$.

The following operation draws upon the maximal support graph of colored *RDGs*.

Definition 5.3

Let Γ be the *RDG* of logic program Π and C be a partial coloring of Γ .

Furthermore, let (V, E) be a maximal support graph of (Γ, C) for some $E \subseteq (\Pi \times \Pi)$.

Then, define $\mathcal{U}_\Gamma : \mathbb{C} \rightarrow \mathbb{C}$ as $\mathcal{U}_\Gamma(C) = (C_\oplus, \Pi \setminus V)$.

This operator allows for coloring rules with $\ominus$ whenever it is clear from the given partial coloring that they will remain unsupported.¹¹ Observe that $\Pi \setminus V = C_\ominus \cup (\Pi \setminus V)$. As with $\mathcal{P}_\Gamma^*$, operator $\mathcal{U}_\Gamma(C)$ is an extension of C . To be more precise, we have $C_\oplus = (\mathcal{U}_\Gamma(C))_\oplus$ and $C_\ominus \cup \bar{S}(\Gamma, C) \subseteq (\mathcal{U}_\Gamma(C))_\ominus$. Unlike $\mathcal{P}_\Gamma^*$, however, operator $\mathcal{U}_\Gamma$ allows for coloring nodes unconnected with the already colored part of the graph.

As regards program Π_1 in Example 1, for instance, we obtain $\mathcal{U}_\Gamma((\emptyset, \emptyset)) = (\emptyset, \{r_5\})$. While this information on r_5 can also be supplied by $\mathcal{P}_\Gamma$, it is not obtainable for “self-supporting 0-loops”, as in $\Pi = \{p \leftarrow q, q \leftarrow p\}$. In this case, we obtain $\mathcal{U}_\Gamma((\emptyset, \emptyset)) = (\emptyset, \{p \leftarrow q, q \leftarrow p\})$, which is not obtainable through $\mathcal{P}_\Gamma$ (and $\mathcal{P}_\Gamma^*$, respectively).

Although $\mathcal{U}_\Gamma$ cannot be defined in general, it is defined on colorings satisfying the conditions of Theorem 4.2, guaranteeing the existence of support graphs.

Corollary 5.8

Let Γ be the *RDG* of logic program Π and C be a partial coloring of Γ .

If (Γ, C) has a support graph, then $\mathcal{U}_\Gamma(C)$ exists.

We may actually characterize $\mathcal{U}_\Gamma(C)$ in terms of iterated applications of an operator, similar to T_Π ; this is detailed in Section 5.4.2 as well as in Appendix Appendix B.

As with $\mathcal{P}_\Gamma^*$, operator $\mathcal{U}_\Gamma$ is reflexive, idempotent, monotonic, and answer set preserving.

Theorem 5.9

Let Γ be the *RDG* of logic program Π and let C and C' be partial colorings of Γ such that $AC_\Pi(C) \neq \emptyset$ and $AC_\Pi(C') \neq \emptyset$.

Then, we have the following properties.

1. $C \sqsubseteq \mathcal{U}_\Gamma(C)$;
2. $\mathcal{U}_\Gamma(C) = \mathcal{U}_\Gamma(\mathcal{U}_\Gamma(C))$;
3. if $C \sqsubseteq C'$, then $\mathcal{U}_\Gamma(C) \sqsubseteq \mathcal{U}_\Gamma(C')$.

¹¹ The relation to unfounded sets is described in Corollary 6.3.

Theorem 5.10

Let Γ be the RDG of logic program Π and C be a partial coloring of Γ .

Then, we have $AC_{\Pi}(C) = AC_{\Pi}(\mathcal{U}_{\Gamma}(C))$.

Note that unlike $\mathcal{P}_{\Gamma}$, operator $\mathcal{U}_{\Gamma}$ leaves the support graph of (Γ, C) unaffected. Since, according to Theorem 4.8, the essential blockage graph is composed of supported rules only, the same applies to this graph as well.

Theorem 5.11

Let $\Gamma = (\Pi, E_0, E_1)$ be the RDG of logic program Π and C be a partial coloring of Γ .

For $C' = \mathcal{U}_{\Gamma}(C)$, we have

1. if $(C_{\oplus}, E)$ is a support graph of (Γ, C) , then $(C_{\oplus}, E)$ is a support graph of (Γ, C') for some $E \subseteq E_0$;
2. if $(C_{\oplus} \cup C_{\ominus}, E_1)|_{S(\Gamma, C)}$ is a blockage graph of (Γ, C) , then $(C_{\oplus} \cup C_{\ominus}, E_1)|_{S(\Gamma, C')}$ is a blockage graph of (Γ, C') .

In fact, we have in the latter case that $(C_{\oplus} \cup C_{\ominus}, E_1)|_{S(\Gamma, C)} = (C'_{\oplus} \cup C'_{\ominus}, E_1)|_{S(\Gamma, C')}$.

Because $\mathcal{U}_{\Gamma}$ implicitly enforces the existence of a support graph, our operators furnish yet another characterization of answer sets.

Corollary 5.12 (Answer set characterization, I')

Let Γ be the RDG of logic program Π and let C be a total coloring of Γ .

Then, C is an admissible coloring of Γ iff $C = \mathcal{P}_{\Gamma}(C)$ and $C = \mathcal{U}_{\Gamma}(C)$.

Clearly, this result is also valid when replacing $\mathcal{P}_{\Gamma}$ by $\mathcal{P}_{\Gamma}^*$.

Note that the last result is obtained from Corollary 5.7 by replacing the requirement of the existence of a support graph by $C = \mathcal{U}_{\Gamma}(C)$. However, the last condition cannot guarantee that all supported unblocked rules belong to $C_{\oplus}$. For instance, $(\emptyset, \{a \leftarrow\})$ has an empty support graph; hence $(\emptyset, \{a \leftarrow\}) = \mathcal{U}_{\Gamma}((\emptyset, \{a \leftarrow\}))$. That is, the trivially supported fact $a \leftarrow$ remains in $C_{\ominus}$. In our setting, such a miscoloring is detected by operator $\mathcal{P}_{\Gamma}$. That is, $\mathcal{P}_{\Gamma}((\emptyset, \{a \leftarrow\}))$ does not exist, since it would yield $(\{a \leftarrow\}, \{a \leftarrow\})$, which is no partial coloring.

5.2 Basic operational characterization

We start by providing a very general operational characterization that possesses a maximum degree of freedom.

To this end, we observe that Corollary 5.7 and 5.12, respectively, can serve as a straightforward *check* for deciding whether a given total coloring constitutes an answer set. A corresponding *guess* can be provided through an operator capturing a non-deterministic (don't know) choice.

Definition 5.4

Let Γ be the RDG of logic program Π and C be a partial coloring of Γ .

For $\circ \in \{\oplus, \ominus\}$, define $\mathcal{C}_{\Gamma}^{\circ} : \mathbb{C} \rightarrow \mathbb{C}$ as

1. $\mathcal{C}_{\Gamma}^{\oplus}(C) = (C_{\oplus} \cup \{r\}, C_{\ominus})$ for some $r \in \Pi \setminus (C_{\oplus} \cup C_{\ominus})$;
2. $\mathcal{C}_{\Gamma}^{\ominus}(C) = (C_{\oplus}, C_{\ominus} \cup \{r\})$ for some $r \in \Pi \setminus (C_{\oplus} \cup C_{\ominus})$.

We use $\mathcal{C}_\Gamma^\circ$ whenever the distinction between $\mathcal{C}_\Gamma^\oplus(C)$ and $\mathcal{C}_\Gamma^\ominus(C)$ is of no importance. Strictly speaking, $\mathcal{C}_\Gamma^\circ$ is also parametrized with r ; we leave this implicit to abstract from the actual choice. In fact, whenever both operators $\mathcal{C}_\Gamma^\oplus(C)$ and $\mathcal{C}_\Gamma^\ominus(C)$ are available, the choice of r is only a “*don’t care*” choice, while that among $\oplus$ and $\ominus$ is the crucial “*don’t know*” choice. Intuitively, this is because all rules must be colored either way; it is the attributed color that is of prime importance for the existence of an answer set.

Combining the previous guess and check operators yields our first operational characterization of admissible colorings (along with its underlying answer sets).

Theorem 5.13 (Operational answer set characterization, I)

Let Γ be the RDG of logic program Π and let C be a total coloring of Γ .

Then, C is an admissible coloring of Γ iff there exists a sequence $(C^i)_{0 \leq i \leq n}$ with the following properties:

1. $C^0 = (\emptyset, \emptyset)$;
2. $C^{i+1} = \mathcal{C}_\Gamma^\circ(C^i)$ for some $\circ \in \{\oplus, \ominus\}$ and $0 \leq i < n$;
3. $C^n = \mathcal{P}_\Gamma(C^n)$;
4. $C^n = \mathcal{U}_\Gamma(C^n)$;
5. $C^n = C$.

In what follows, we refer to such sequences also as *coloring sequences*. Note that all sequences satisfying conditions 1-5 of Theorem 5.13 are *successful* in the sense that their last element corresponds to an existing answer set. If a program has no answer set, then no such sequence exists.

Although this straightforward guess and check approach may not be of great implementation value, it supplies us with an initial skeleton for the coloring process that we refine in the sequel. In particular, this characterization stresses the basic fact that we possess complete freedom in forming a coloring sequence as long as we can guarantee that the resulting coloring is a fixed point of $\mathcal{P}_\Gamma$ and $\mathcal{U}_\Gamma$. It is worth mentioning that this simple approach is inapplicable when fixing $\circ$ to either $\oplus$ or $\ominus$ (cf. Section 5.3 below).

We observe the following properties.

Theorem 5.14

Given the same prerequisites as in Theorem 5.13, let $(C^i)_{0 \leq i \leq n}$ be a sequence satisfying conditions 1-5 in Theorem 5.13.

Then, we have the following properties for $0 \leq i \leq n$.

1. C^i is a partial coloring;
2. $C^i \sqsubseteq C^{i+1}$;
3. $AC_\Pi(C^i) \supseteq AC_\Pi(C^{i+1})$;
4. $AC_\Pi(C^i) \neq \emptyset$;
5. (Γ, C^i) has a (maximal) support graph.

All these properties represent invariants of the consecutive colorings. While the first three properties are provided by operator $\mathcal{C}_\Gamma^\circ$ in choosing among uncolored rules only, the last two properties are actually enforced by the final coloring C^n , that is, the “check” expressed by conditions 3–5 in Theorem 5.13. In fact, sequences only enjoying conditions 1 and 2 in Theorem 5.13, fail to satisfy Property 4 and 5 in general. In practical terms, this means that

computations of successful sequences may be led numerous times on the “garden path” before termination.

As it is well-known, the number of choices can be significantly reduced by applying deterministic operators. To this end, given a partial coloring C , define $(\mathcal{PU})_{\Gamma}^*(C)$ as the $\sqsubseteq$ -smallest partial coloring containing C and being closed under $\mathcal{P}_{\Gamma}$ and $\mathcal{U}_{\Gamma}$.¹²

Theorem 5.15 (Operational answer set characterization, II)

Let Γ be the RDG of logic program Π and let C be a total coloring of Γ .

Then, C is an admissible coloring of Γ iff there exists a sequence $(C^i)_{0 \leq i \leq n}$ with the following properties:

1. $C^0 = (\mathcal{PU})_{\Gamma}^*((\emptyset, \emptyset))$;
2. $C^{i+1} = (\mathcal{PU})_{\Gamma}^*(C_{\Gamma}^{\circ}(C^i))$ for some $\circ \in \{\oplus, \ominus\}$ and $0 \leq i < n$;
3. $C^n = C$.

On the one hand, the continuous applications of $\mathcal{P}_{\Gamma}$ and $\mathcal{U}_{\Gamma}$ extend colorings after each choice. On the other hand, this proceeding guarantees that each partial coloring C^i is closed under $\mathcal{P}_{\Gamma}$ and $\mathcal{U}_{\Gamma}$.

Regarding correctness and completeness, however, it is clear in view of Theorem 5.13 that any number of iterations of $\mathcal{P}_{\Gamma}$ and $\mathcal{U}_{\Gamma}$ can be executed after C_{Γ}° as long as $(\mathcal{PU})_{\Gamma}^*$ is the final operation leading to C^n in Theorem 5.15.

For illustration, consider the coloring sequence (C^0, C^1) obtained for answer set $\{b, p, f'\}$ of program Π_1 in Example 1:

$$\begin{aligned} C^0 &= (\mathcal{PU})_{\Gamma}^*((\emptyset, \emptyset)) &= (\{p \leftarrow, b \leftarrow p\}, \{b \leftarrow m\}) \\ C^1 &= (\mathcal{PU})_{\Gamma}^*(C_{\Gamma}^{\oplus}(C^0)) &= (\{p \leftarrow, b \leftarrow p, f' \leftarrow p, \text{not } f\}, \\ & &\quad \{b \leftarrow m, f \leftarrow b, \text{not } f', x \leftarrow f, f', \text{not } x\}) \end{aligned}$$

The decisive operation in this sequence is the application of $C_{\Gamma}^{\oplus}$ leading to $C(f \leftarrow b, \text{not } f') = \oplus$. Note that in this simple example all propagation is accomplished by operator $\mathcal{P}_{\Gamma}$. We have illustrated the formation of the sequence in Figure 7. The same final result is obtained

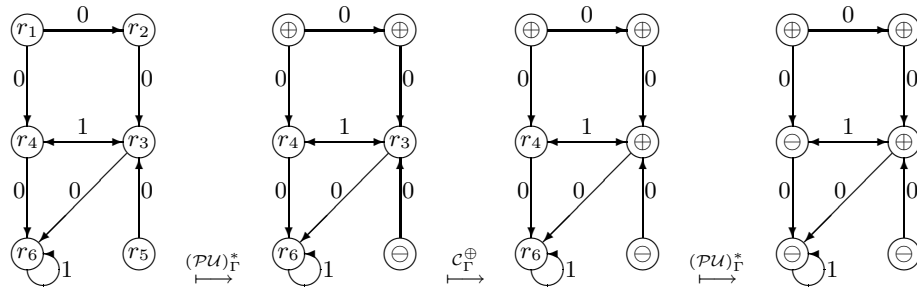


Fig. 7. A coloring sequence.

when choosing $C_{\Gamma}^{\ominus}$ such that $C(f' \leftarrow p, \text{not } f) = \ominus$. This illustrates that several coloring sequences may lead to the same answer set.

As with Corollary 5.3, we have the following result.

¹² An iterative characterization of $(\mathcal{PU})_{\Gamma}^*(C)$ is given in Appendix Appendix B.

Corollary 5.16

Let Γ be the *RDG* of logic program Π . Then, $(\mathcal{PU})_{\Gamma}^*((\emptyset, \emptyset))$ exists.

The usage of continuous propagations leads to further invariant properties.

Theorem 5.17

Given the same prerequisites as in Theorem 5.15, let $(C^i)_{0 \leq i \leq n}$ be a sequence satisfying conditions 1-3 in Theorem 5.15.

Then, we have the following:

- 1.–5. as given in Theorem 5.14;
6. $C_{\oplus}^{i+1} \supseteq S(\Gamma, C^i) \cap \overline{B}(\Gamma, C^i)$;
7. $C_{\ominus}^{i+1} \supseteq \overline{S}(\Gamma, C^i) \cup B(\Gamma, C^i)$.

Taking the last two properties together with Condition 5 from Theorem 5.14, we see that propagation gradually enforces exactly the attributes on partial colorings, expressed in Theorem 4.4 for admissible colorings.

Given that we obtain only two additional properties, one may wonder whether exhaustive propagation truly pays off. In fact, its great value becomes apparent when looking at the properties of prefix sequences, not necessarily leading to a successful end.

Theorem 5.18

Given the same prerequisites as in Theorem 5.15, let $(C^j)_{0 \leq j \leq m}$ be a sequence satisfying Condition 1 and 2 in Theorem 5.15.

Then, we have the following.

- 1.–3., 5. as given in Theorem 5.14;
- 6.–7. as given in Theorem 5.17.

Using exhaustive propagations, we observe that except for Property 4 all properties possessed by successful sequences, are shared by (possibly unsuccessful) prefix sequences.

The next results make the aforementioned claim on the effect of deterministic operators on admissible prefix sequences more precise:

Theorem 5.19

Let Γ be the *RDG* of logic program Π .

Let m be the number of sequences over $\mathbb{C}$ satisfying conditions 1-4 in Theorem 5.13 and let n be the number of sequences over $\mathbb{C}$ satisfying conditions 1 and 2 in Theorem 5.15.

Then, we have $n \leq m$.

Moreover, successful sequences are usually shorter when using propagation.

Theorem 5.20

Let Γ be the *RDG* of logic program Π and C be an admissible coloring of Γ .

Let $(C^i)_{0 \leq i \leq m}$ and $(C^j)_{0 \leq j \leq n}$ be the shortest sequences obtained for C according to Theorem 5.13 and Theorem 5.15, respectively.

Then, we have $n \leq m$.

The same result can be shown for the longest sequences.

5.3 Unicoloring operational characterization

As mentioned above, the use of two coloring operators is essential for our initial operational characterization given in Theorem 5.13. In fact, this is obsolete when using continuous propagation, as done in Theorem 5.15. That is, rather than using two coloring operators, we may actually use only one of them, and leave the attribution of the complementary color to propagation operators. To be more precise, this amounts to replacing Condition 2 in Theorem 5.15 either by

$$2.^+ C^{i+1} = (\mathcal{PU})_\Gamma^*(\mathcal{C}_\Gamma^\oplus(C^i)) \quad \text{or} \quad 2.^- C^{i+1} = (\mathcal{PU})_\Gamma^*(\mathcal{C}_\Gamma^\ominus(C^i)) \quad \text{for} \\ 0 \leq i < n.$$

Then, we have the following result.

Corollary 5.21 (Operational answer set characterization, II⁺/II⁻)

Theorem 5.15 still holds, when replacing Condition 2 either by 2.⁺ or 2.⁻.

Note that the possible set of (prefix) sequences is smaller than that obtained from the “bi-coloring” in Theorem 5.15, simply, because choices are restricted to a single color. On the other hand, we see no advantage of either approach regarding the length of successful sequences. Also, since the choice of the color is fixed, the choice of the rule to be colored becomes a “don’t know” choice.

The last type of characterization is based on exhaustive propagation. Hence, we are interested in the question how much propagation is sufficient for compensating the possibility of choosing among two colors. The next result gives an answer for the case of unicoloring with $\mathcal{C}_\Gamma^\oplus$.

Theorem 5.22 (Operational answer set characterization, III⁺)

Let Γ be the RDG of logic program Π and let C be a total coloring of Γ .

Then, C is an admissible coloring of Γ iff there exists a sequence $(C^i)_{0 \leq i \leq n}$ with the following properties:

1. $C^0 = (\emptyset, \emptyset)$;
2. $C^{i+1} = \mathcal{C}_\Gamma^\oplus(C^i)$ for $0 \leq i < n - 1$;
3. $C^n = \mathcal{U}_\Gamma(\mathcal{P}_\Gamma^*(C^{n-1}))$;
4. $C^n = C$.

The actual propagation is done in Condition 3. That is, the consecutive application of $\mathcal{U}_\Gamma$ and $\mathcal{P}_\Gamma^*$ allows for coloring all remaining rules in C^{n-1} with $\ominus$.

Note that the application order of $\mathcal{P}_\Gamma^*$ and $\mathcal{U}_\Gamma$ in Condition 3 cannot be reversed. To see this, reconsider program Π_2 in Example 2, consisting of rules

$$\begin{aligned} r_1 : a &\leftarrow \\ r_2 : b &\leftarrow \text{not } a \\ r_3 : c &\leftarrow b \\ r_4 : b &\leftarrow c. \end{aligned}$$

and observe that its only answer set $\{a\}$ corresponds to coloring $(\{r_1\}, \{r_2, r_3, r_4\})$. In order to obtain this according to Theorem 5.22, we must color rule r_1 with $\oplus$. We then get $\mathcal{P}_\Gamma^*((\{r_1\}, \emptyset)) = (\{r_1\}, \{r_2\})$ and finally $\mathcal{U}_\Gamma((\{r_1\}, \{r_2\})) = (\{r_1\}, \{r_2, r_3, r_4\})$.

Switching the last operators yields $\mathcal{U}_\Gamma((\{r_1\}, \emptyset)) = (\{r_1\}, \emptyset)$ and $\mathcal{P}_\Gamma^*((\{r_1\}, \emptyset)) = (\{r_1\}, \{r_2\})$ and we fail to obtain the desired result.

Interestingly, the usage of the operator $\mathcal{P}_\Gamma^*$ is sufficient when coloring with $\ominus$ only.

Theorem 5.23 (Operational answer set characterization, III⁻)

Let Γ be the *RDG* of logic program Π and let C be a total coloring of Γ .

Then, C is an admissible coloring of Γ iff there exists a sequence $(C^i)_{0 \leq i \leq n}$ with the following properties:

1. $C^0 = (\emptyset, \emptyset)$;
2. $C^{i+1} = \mathcal{C}_\Gamma^\ominus(C^i)$ for $0 \leq i < n - 1$;
3. $C^n = \mathcal{P}_\Gamma^*(C^{n-1})$;
4. $C^n = C$.

Unicoloring offers another perspective on strategies employing bicoloring: The coloration with the second color may be regarded as some sort of “lemmatization” avoiding duplicate solutions rather than a genuine choice.

5.4 Support-driven operational characterization

The number of possible choices encountered during a computation is of crucial importance. We have already seen above that propagation has great computational advantages. What else may cut down the number of choices?

Looking at the graph structures underlying an admissible coloring (cf. Theorem 4.8), we observe that support graphs capture a global — since recursive — structure, while blockage graphs aim at a rather local structure, based on arc-wise constraints. Consequently, it seems advisable to prefer choices maintaining support structures over those maintaining blockage relations, since the former have more global repercussions than the latter.

To this end, we develop in this section a strategy that is based on a choice operation restricted to supported rules.

Definition 5.5

Let Γ be the *RDG* of logic program Π and C be a partial coloring of Γ .

For $\circ \in \{\oplus, \ominus\}$, define $\mathcal{D}_\Gamma^\circ : \mathbb{C} \rightarrow \mathbb{C}$ as

1. $\mathcal{D}_\Gamma^\oplus(C) = (C_\oplus \cup \{r\}, C_\ominus)$ for some $r \in S(\Gamma, C) \setminus (C_\oplus \cup C_\ominus)$;
2. $\mathcal{D}_\Gamma^\ominus(C) = (C_\oplus, C_\ominus \cup \{r\})$ for some $r \in S(\Gamma, C) \setminus (C_\oplus \cup C_\ominus)$.

Compared to operators $\mathcal{C}_\Gamma^\circ$, the latter restrict their choice to supported rules. Verifying whether a rule is supported can then be done in a local fashion by looking at the immediate predecessors in the *RDG*. With this little additional effort, the number of colorable rules is smaller than that encountered when applying $\mathcal{C}_\Gamma^\circ$. The benefit of support-driven characterizations is that the length of coloring sequences is bound by the number of supported rules. Depending on how the non-determinism of $\mathcal{D}_\Gamma^\circ$ is dealt with algorithmically, this may either lead to a reduced depth of the search tree or a reduced branching factor.

In fact, in a successful coloring sequence $(C^i)_{0 \leq i \leq n}$, all rules in $(C^n)_\oplus$ must belong to an encompassing support graph and thus be supported. Hence, by means of $\mathcal{D}_\Gamma^\oplus(C)$ (along with $\mathcal{P}_\Gamma^*$) the supportedness of each set $C_\oplus^i$ can be made invariant. Consequently,

such a proceeding allows for establishing the existence of support graphs, as stipulated in Theorem 4.4, so to speak “on the fly”. To a turn, this allows for a much simpler approach to the task(s) previously accomplished by operator $\mathcal{U}_\Gamma$. We discuss two such simplifications in what follows.

5.4.1 Support-driven operational characterization I

Given that the existence of support graphs is guaranteed, one may actually completely dispose of operator $\mathcal{U}_\Gamma$ and color in a final step all uncolored rules with $\ominus$.

Definition 5.6

Let Γ be the RDG of logic program Π and C a partial coloring of Γ .

Then, define $\mathcal{N}_\Gamma : \mathbb{C} \rightarrow \mathbb{C}$ as $\mathcal{N}_\Gamma(C) = (C_\oplus, \Pi \setminus C_\oplus)$.

Roughly speaking, the idea is then to “actively” color only supported rules and rules blocked by supported rules; all remaining rules are then unsupported and “thrown” into $C_\ominus$ in a final step. This is made precise in the following characterization.

Theorem 5.24 (Operational answer set characterization, IV)

Let Γ be the RDG of logic program Π and let C be a total coloring of Γ .

Then, C is an admissible coloring of Γ iff there exists a sequence $(C^i)_{0 \leq i \leq n}$ with the following properties:

1. $C^0 = (\emptyset, \emptyset)$;
2. $C^{i+1} = \mathcal{D}_\Gamma^\circ(C^i)$ where $\circ \in \{\oplus, \ominus\}$ and $0 \leq i < n - 1$;
3. $C^n = \mathcal{N}_\Gamma(C^{n-1})$;
4. $C^n = \mathcal{P}_\Gamma(C^n)$;
5. $C^n = C$.

We note that there is a little price to pay for turning $\mathcal{U}_\Gamma$ into $\mathcal{N}_\Gamma$, expressed by the test on the final total coloring in Condition 4. Without it, one could use $\mathcal{N}_\Gamma$ to obtain a total coloring by coloring rules with $\ominus$ in an arbitrary way.

We obtain the following properties for the previous type of coloring sequences.

Theorem 5.25

Given the same prerequisites as in Theorem 5.24, let $(C^i)_{0 \leq i \leq n}$ be a sequence satisfying conditions 1-5 in Theorem 5.24.

Then, we have the following.

- 1.–5. as given in Theorem 5.14;
8. $(C_\oplus^i, E)$ is a support graph of (Γ, C^i) for some $E \subseteq \Pi \times \Pi$.

Condition 8 makes the aforementioned claim on the supportedness of each rule in $C_\oplus^i$ explicit. In contrast to the coloring sequences enjoying Condition 5 only, the sequences formed by means of $\mathcal{D}_\Gamma^\circ$ guarantee that each $C_\oplus^i$ forms a support graph.

In fact, there is some overlap among operator $\mathcal{D}_\Gamma^\ominus$ and $\mathcal{N}_\Gamma$. To see this, consider $\Pi = \{a \leftarrow, b \leftarrow \text{not } a\}$. We must initially apply $\mathcal{D}_\Gamma^\oplus$ to obtain $(\{a \leftarrow\}, \emptyset)$ from the empty coloring. Then, however, there are two possibilities for obtaining total coloring $(\{a\}, \{b \leftarrow \text{not } a\})$, either by applying $\mathcal{D}_\Gamma^\ominus$ or by applying $\mathcal{N}_\Gamma$. In fact, in view of this, $\mathcal{N}_\Gamma$ allows us to dispose of $\mathcal{D}_\Gamma^\ominus$:

Corollary 5.26 (Operational answer set characterization, IV^+)

Theorem 5.24 still holds, when replacing Condition 2 by

$$2.^+ \quad C^{i+1} = \mathcal{D}_\Gamma^\oplus(C^i) \text{ where } 0 \leq i < n - 1.$$

Observe that there is no characterization using $\mathcal{D}_\Gamma^\ominus$ and $\mathcal{N}_\Gamma$ because this leaves no possibility for coloring rules with $\oplus$.

Theorem 5.27

Given the same prerequisites as in Corollary 5.26, let $(C^i)_{0 \leq i \leq n}$ be a sequence satisfying conditions 1-5 in Corollary 5.26.

Then, we have the following.

- 1.–5. as given in Theorem 5.14;
8. as given in Theorem 5.25;
9. $(C_\oplus^i \cup C_\ominus^i, E)|_{S(\Gamma, C^i)}$ is a blockage graph of (Γ, C^i) .

Interestingly, only support-driven unicoloring by means of $\mathcal{D}_\Gamma^\oplus$ can guarantee the consecutive existence of blockage graphs. This is because $\mathcal{D}_\Gamma^\oplus$ warrants, first, that $C_\oplus^i \subseteq S(\Gamma, C^i)$ and thus all blocking rules are taken into account and, second, that rules are not arbitrarily colored with $\ominus$ but rather guarded by operator $\mathcal{P}_\Gamma$.¹³

As discussed above, there is some overlap in the characterization expressed in Theorem 5.24. Interestingly, this can be eliminated by adding propagation operator $\mathcal{P}_\Gamma^*$ to the previous characterization. This results in coloring sequences corresponding to the basic strategy used in the noMoRE system (Anger et al. 2002).

Theorem 5.28 (Operational answer set characterization, V)

Let Γ be the RDG of logic program Π and let C be a total coloring of Γ .

Then, C is an admissible coloring of Γ iff there exists a sequence $(C^i)_{0 \leq i \leq n}$ with the following properties:

1. $C^0 = \mathcal{P}_\Gamma^*((\emptyset, \emptyset))$;
2. $C^{i+1} = \mathcal{P}_\Gamma^*(\mathcal{D}_\Gamma^\circ(C^i))$ where $\circ \in \{\oplus, \ominus\}$ and $0 \leq i < n - 1$;
3. $C^n = \mathcal{N}_\Gamma(C^{n-1})$;
4. $C^n = \mathcal{P}_\Gamma(C^n)$;
5. $C^n = C$.

For illustration, consider the coloring sequence (C^0, C^1, C^2) obtained for answer set $\{b, p, f'\}$ of program Π_1 in Example 1:

$$\begin{aligned} C^0 &= \mathcal{P}_\Gamma^*((\emptyset, \emptyset)) &= (\{p \leftarrow, b \leftarrow p\}, \{b \leftarrow m\}) \\ C^1 &= \mathcal{P}_\Gamma^*(\mathcal{D}_\Gamma^\oplus(C^0)) &= (\{p \leftarrow, b \leftarrow p, f' \leftarrow p, \text{not } f\}, \\ & & \{b \leftarrow m, f \leftarrow b, \text{not } f', x \leftarrow f, f', \text{not } x\}) \\ C^2 &= \mathcal{N}_\Gamma(C^1) &= C^1 \end{aligned}$$

This sequence is similar to the one obtained for Π_1 with the characterization given in Theorem 5.15. All propagation is accomplished by operator $\mathcal{P}$. However, operator $\mathcal{D}_\Gamma^\oplus$

¹³ This is more apparent in Corollary 5.31 below, when using $\mathcal{P}_\Gamma^*$ for propagation as well.

is faced with less choices than $C_\Gamma^\oplus$ (in Theorem 5.15) because only two among the three uncolored rules are supported.

For another example, consider program Π_2 in Example 2. We get a coloring sequence (C^0, C^1) , where

$$\begin{aligned} C^0 &= \mathcal{P}_\Gamma^*((\emptyset, \emptyset)) &= (\{a \leftarrow\}, \{b \leftarrow \text{not } a\}) \\ C^1 &= \mathcal{N}_\Gamma((\{a \leftarrow\}, \{b \leftarrow \text{not } a\})) &= (\{a \leftarrow\}, \{b \leftarrow \text{not } a, c \leftarrow b, b \leftarrow c\}). \end{aligned}$$

Note that operator $\mathcal{D}_\Gamma^\circ$ is inapplicable to C^0 , since $S(\Gamma, C^0) \setminus (C_\oplus^0 \cup C_\ominus^0)$ is empty. In this situation, $\mathcal{C}_\Gamma^\circ$ would be applicable to color either of the two uncolored rules in $\Pi \setminus (C_\oplus^0 \cup C_\ominus^0)$. In the final step, the two unfounded rules are directly colored by operator $\mathcal{N}_\Gamma$ without any further efforts.

Indeed, the strategy of noMORE applies $\mathcal{P}_\Gamma^* \circ \mathcal{D}_\Gamma^\circ$ as long as there are supported rules. Once no more uncolored supported rules exist, operator $\mathcal{N}_\Gamma$ is called. Finally, $\mathcal{P}_\Gamma$ is applied but only to those rules colored previously by $\mathcal{N}_\Gamma$.¹⁴ At first sight, this approach may seem to correspond to a subclass of the coloring sequences described above, in the sense that noMORE enforces a maximum number of transitions described in Condition 2. To see that this is not the case, we observe the following property.¹⁵

Theorem 5.29

Given the same prerequisites as in Theorem 5.28, let $(C^i)_{0 \leq i \leq n}$ be a sequence satisfying conditions 1-5 in Theorem 5.28.

Then, we have $(\mathcal{N}_\Gamma(C^{n-1})_\ominus \setminus C_\ominus^{n-1}) \subseteq \overline{S}(\Gamma, C)$.

That is, no matter which (supported) rules are colored $\ominus$ by $\mathcal{D}_\Gamma^\ominus$, operator $\mathcal{N}_\Gamma$ only applies to unsupported ones. It is thus no restriction to enforce the consecutive application of $\mathcal{P}_\Gamma^*$ and $\mathcal{D}_\Gamma^\circ$ until no more supported rules are available. In fact, it is the interplay of the two last operators that guarantees this property. For instance, looking at $\Pi = \{a, b \leftarrow \text{not } a\}$, we see that we directly obtain the final total coloring because $(\{a\}, \{b \leftarrow \text{not } a\}) = \mathcal{P}_\Gamma^*(\mathcal{D}_\Gamma^\oplus((\emptyset, \emptyset)))$, without any appeal to $\mathcal{N}_\Gamma$. Rather it is $\mathcal{P}_\Gamma^*$ that detects that $b \leftarrow \text{not } a$ belongs to the set of blocked rules. Generally speaking, $\mathcal{D}_\Gamma^\oplus$ consecutively chooses the generating rules of an answer set, finally gathered in $C_\oplus = S(\Gamma, C) \cap \overline{B}(\Gamma, C)$. Every rule in $B(\Gamma, C)$ is blocked by some rule in $C_\oplus$. So whenever a rule r is added by $\mathcal{D}_\Gamma^\oplus$ to $C_\oplus$, operator $\mathcal{P}_\Gamma^*$ adds all rules blocked by r to $C_\ominus$. In this way, $\mathcal{P}_\Gamma^*$ and $\mathcal{D}_\Gamma^\oplus$ gradually color all rules in $S(\Gamma, C) \cap \overline{B}(\Gamma, C)$ and $B(\Gamma, C)$, so that all remaining uncolored rules, subsequently treated by $\mathcal{N}_\Gamma$, must belong to $\overline{S}(\Gamma, C)$.¹⁶

Furthermore, we obtain the following properties.

Theorem 5.30

Given the same prerequisites as in Theorem 5.28, let $(C^i)_{0 \leq i \leq n}$ be a sequence satisfying conditions 1-5 in Theorem 5.28.

Then, we have the following.

¹⁴ Efficient propagation operations, only working on certain subsets of the input, are discussed in a companion paper.

¹⁵ It is worth mentioning that in practice the application of $\mathcal{P}_\Gamma$ in Condition 4 can be restricted to those rules colored by $\mathcal{N}_\Gamma$ in Condition 3.

¹⁶ Some rules of $\overline{S}(\Gamma, C)$ are already detected and added to $C_\ominus$ by $\mathcal{P}_\Gamma^*$.

- 1.–5. as given in Theorem 5.14;
- 6.–7. as given in Theorem 5.17;
- 8. as given in Theorem 5.25.

Finally, for the sake of completeness, we give the unicoloring variant along with its properties.

Corollary 5.31 (Operational answer set characterization, V^+)

Theorem 5.28 still holds, when replacing Condition 2 by

$$2.^+ \quad C^{i+1} = \mathcal{P}_\Gamma^*(\mathcal{D}_\Gamma^\oplus(C^i)) \text{ where } 0 \leq i < n - 1.$$

Theorem 5.32

Given the same prerequisites as in Corollary 5.31, let $(C^i)_{0 \leq i \leq n}$ be a sequence satisfying conditions 1-5 in Corollary 5.31.

Then, we have the following.

- 1.–5. as given in Theorem 5.14;
- 6.–7. as given in Theorem 5.17;
- 8.–9. as given in Theorem 5.25 and 5.27.

The previous characterization also satisfies Theorem 5.29.

5.4.2 Support-driven operational characterization II

Although the previous approach has turned out to be of practical value as the core inference strategy of the noMoRE system, it is still improvable. This is because the early detection of unsupported rules may allow for better propagation results and thus fewer choices. To see this, consider program $\Pi_{12} = \{r_1, r_2, r_3\}$, where ¹⁷

$$\begin{aligned} r_1 : \quad p &\leftarrow \text{not } q \\ r_2 : \quad q &\leftarrow r, \text{not } p \\ r_3 : \quad r &\leftarrow q. \end{aligned} \tag{12}$$

This program has the answer set $\{p\}$ represented by the admissible coloring $(\{r_1\}, \{r_2, r_3\})$. Without an operator like $\mathcal{U}_\Gamma$ one would need a choice operation for detecting the unfounded rules r_2 and r_3 . Following Theorem 5.28, we get the coloring sequence:

$$\begin{aligned} C^0 &= \mathcal{P}_\Gamma^*((\emptyset, \emptyset)) &= (\emptyset, \emptyset) \\ C^1 &= \mathcal{P}_\Gamma^*(\mathcal{D}_\Gamma^\oplus(C^0)) &= (\{r_1\}, \emptyset) \\ C^2 &= \mathcal{N}_\Gamma(C^1) &= (\{r_1\}, \{r_2, r_3\}) \end{aligned}$$

Although the support-driven choice operator $\mathcal{D}_\Gamma^\circ$ is only faced with a single alternative, as opposed to the three alternatives encountered by operator $\mathcal{C}_\Gamma^\circ$, it would be clearly advantageous to solve this example by propagation only. This motivates a variant of operator $\mathcal{U}_\Gamma$ that takes advantage of the support-driven strategy pursued by $\mathcal{D}_\Gamma^\circ$.

¹⁷ For the sake of uniqueness, we label the program with the equation number.

Given the *RDG* Γ of a logic program Π and a partial coloring C of Γ , define $\mathcal{T}_\Gamma : \mathbb{C} \rightarrow \mathbb{C}$ as

$$\mathcal{T}_\Gamma(C) = (C_\oplus \cup (S(\Gamma, C) \setminus C_\ominus), C_\ominus)$$

and define $\mathcal{T}_\Gamma^*(C)$ as the $\sqsubseteq$ -smallest partial coloring containing C and being closed under $\mathcal{T}_\Gamma$.

The next result shows that $\mathcal{T}_\Gamma^*$ extends a given support graph to a maximal one.

Theorem 5.33

Let Γ be the *RDG* of logic program Π and C be a partial coloring of Γ .

If $(C_\oplus, E)$ is a support graph of (Γ, C) , then $((\mathcal{T}_\Gamma^*(C))_\oplus, E')$ is a maximal support graph of (Γ, C) for some $E, E' \subseteq (\Pi \times \Pi)$.

Recall that by definition $C \sqsubseteq \mathcal{T}_\Gamma^*(C)$.

With this, we can define the following incremental (and constructive) variant of $\mathcal{U}_\Gamma$:

Definition 5.7

Let Γ be the *RDG* of logic program Π and C a partial coloring of Γ .

Then, define $\mathcal{V}_\Gamma : \mathbb{C} \rightarrow \mathbb{C}$ as $\mathcal{V}_\Gamma(C) = (C_\oplus, \Pi \setminus V)$ where $V = \mathcal{T}_\Gamma^*(C)_\oplus$.

Observe that $\Pi \setminus V = C_\ominus \cup (\Pi \setminus V)$. It is instructive to compare the latter definition with that of $\mathcal{U}_\Gamma$, given in Definition 5.3. In fact, $\mathcal{U}_\Gamma$ can be obtained by means of $\mathcal{T}_\Gamma^*$ by defining V in Definition 5.3 as $V = \mathcal{T}_\Gamma^*((\emptyset, \emptyset))_\oplus$ subject to the condition $C_\oplus \subseteq V$ and $C_\ominus \cap V = \emptyset$.

The next result tells us when both operators coincide.

Corollary 5.34

Let Γ be the *RDG* of logic program Π and C be a partial coloring of Γ .

If $(C_\oplus, E)$ is a support graph of (Γ, C) for some $E \subseteq (\Pi \times \Pi)$, then $\mathcal{U}_\Gamma(C) = \mathcal{V}_\Gamma(C)$.

Given that $\mathcal{D}_\Gamma^\circ$ adds only supported rules to a coloring C , it gradually extends the underlying support graph around $C_\oplus$. Hence, we may replace operator $\mathcal{U}_\Gamma$ by $\mathcal{V}_\Gamma$ whenever using choice operator $\mathcal{D}_\Gamma^\circ$. This is impossible when using operator $\mathcal{C}_\Gamma^\circ$, since its choice may not be supported and thus destroy the invariant support property expressed in Property 8 in Theorem 5.25. Unlike $\mathcal{U}_\Gamma$, operator $\mathcal{V}_\Gamma$ takes the support status of all rules in $C_\oplus$ for granted. This allows $\mathcal{V}_\Gamma$ to focus on uncolored rules, viz. $\Pi \setminus (C_\oplus \cup C_\ominus)$. Such an assumption is not made by $\mathcal{U}_\Gamma$, which (possibly) reestablishes the support status of rules in $C_\oplus$; it is thus prone to consider all rules in $\Pi \setminus C_\ominus$. Technically, this is reflected by the fact that the computation of $\mathcal{V}_\Gamma$ by means of $\mathcal{T}_\Gamma$ may start from C , while the one of $\mathcal{U}_\Gamma$ by $\mathcal{T}_\Gamma$ must start out with the empty coloring. In all, $\mathcal{V}_\Gamma$ does not lead to fewer choices than $\mathcal{U}_\Gamma$, it has rather the computational advantage of avoiding redundant computations.

Now, we are ready to give support-oriented counterparts of the operational characterizations given in the two previous subsections. Most of them are obtainable by simply replacing operators $\mathcal{C}_\Gamma^\circ$ and $\mathcal{U}_\Gamma$ by $\mathcal{D}_\Gamma^\circ$ and $\mathcal{V}_\Gamma$, respectively. The first exception is Theorem 5.13 where the replacement of $\mathcal{C}_\Gamma^\circ$ by $\mathcal{D}_\Gamma^\circ$ leaves no way of coloring unsupported rules with $\ominus$. (This provides further evidence for the necessity of $\mathcal{N}_\Gamma$ in Theorem 5.24.)

For defining a support-oriented counterpart of Theorem 5.15, we first need the following propagation operator: As with $(\mathcal{PU})_\Gamma^*$, given a partial coloring C , we define $(\mathcal{PV})_\Gamma^*(C)$ as the $\sqsubseteq$ -smallest partial coloring containing C and being closed under $\mathcal{P}_\Gamma$ and $\mathcal{V}_\Gamma$.¹⁸

¹⁸ A characterization in terms of iterated applications is given in Appendix Appendix B.

Theorem 5.35 (Operational answer set characterization, VI)

Let Γ be the RDG of logic program Π and let C be a total coloring of Γ .

Then, C is an admissible coloring of Γ iff there exists a sequence $(C^i)_{0 \leq i \leq n}$ with the following properties:

1. $C^0 = (\mathcal{PV})_{\Gamma}^*((\emptyset, \emptyset))$;
2. $C^{i+1} = (\mathcal{PV})_{\Gamma}^*(\mathcal{D}_{\Gamma}^{\circ}(C^i))$ where $\circ \in \{\oplus, \ominus\}$ and $0 \leq i < n$;
3. $C^n = C$.

For illustration, consider program Π_{12} in (12). We get a coloring sequence (C^0) , where

$$C^0 = (\mathcal{PV})_{\Gamma}^*((\emptyset, \emptyset)) = (\{p \leftarrow \text{not } q\}, \{q \leftarrow r, \text{not } p, r \leftarrow q\}).$$

Or to be more precise,

$$\begin{aligned} \mathcal{V}_{\Gamma}((\emptyset, \emptyset)) &= (\emptyset, \{q \leftarrow r, \text{not } p, r \leftarrow q\}) \\ C^0 &= \mathcal{P}_{\Gamma}((\emptyset, \{q \leftarrow r, \text{not } p, r \leftarrow q\})) = (\{p \leftarrow \text{not } q\}, \{q \leftarrow r, \text{not } p, r \leftarrow q\}). \end{aligned}$$

Analogously, we obtain for program Π_2 in Example 2 a singular coloring sequence (C^0) , where

$$C^0 = (\mathcal{PV})_{\Gamma}^*((\emptyset, \emptyset)) = (\{a \leftarrow\}, \{b \leftarrow \text{not } a, c \leftarrow b, b \leftarrow c\}).$$

We note the following invariant properties of the sequence.

Theorem 5.36

Given the same prerequisites as in Theorem 5.35, let $(C^i)_{0 \leq i \leq n}$ be a sequence satisfying conditions 1-3 in Theorem 5.35.

Then, we have the following.

- 1.–5. as given in Theorem 5.14;
- 6.–7. as given in Theorem 5.17;
8. as given in Theorem 5.32.

In analogy to what we have shown in Section 5.3, we may replace Condition 2 in Theorem 5.35 either by

$$2.^+ C^{i+1} = (\mathcal{PV})_{\Gamma}^*(\mathcal{D}_{\Gamma}^{\oplus}(C^i)) \quad \text{or} \quad 2.^- C^{i+1} = (\mathcal{PV})_{\Gamma}^*(\mathcal{D}_{\Gamma}^{\ominus}(C^i)) \quad \text{for} \\ 0 \leq i < n.$$

Then, we have the following.

Corollary 5.37 (Operational answer set characterization, VI⁺/VI⁻)

Theorem 5.35 still holds, when replacing Condition 2 either by 2.⁺ or 2.⁻.

Also, all results obtained in Section 5.4.1 remain true, when replacing $\mathcal{N}_{\Gamma}$ by $\mathcal{V}_{\Gamma}$.

5.5 Summary

In view of the many different operational characterizations, we summarize in Table 1 their approach to the formation of coloring sequences and their major properties. For this, we distinguish between the formation of coloring sequences $(C^i)_{0 \leq i \leq n}$ and the test on their

final element C^n . For describing the formation process in a compact way, we confine ourselves to operators and denote their composition by $\circ$. To be precise, given operators O_1 and O_2 , we write $(O_1 \circ O_2)$ instead of $(\lambda x. O_1(O_2(x)))$. Furthermore, we use O^k to denote k consecutive applications of O for some arbitrary positive integer k .

For instance, Theorem 5.13 captures sequences that are obtained by $k = n$ applications of $\mathcal{C}_\Gamma^\circ$; this is indicated in Table 1 by $[\mathcal{C}_\Gamma^\circ]^k$. The two final tests on C^n , viz. $C^n = \mathcal{P}_\Gamma(C^n)$ and $C^n = \mathcal{U}_\Gamma(C^n)$, are pointed out by $\mathcal{P}_\Gamma, \mathcal{U}_\Gamma$.

	Section	Theorem	Formation Process	Check	Properties	Properties Prefix sequences
I	5.2	5.13	$[\mathcal{C}_\Gamma^\circ]^k$	$\mathcal{P}_\Gamma, \mathcal{U}_\Gamma$	1–5	1–3
II		5.15	$[(\mathcal{PU})_\Gamma^* \circ \mathcal{C}_\Gamma^\circ]^k \circ (\mathcal{PU})_\Gamma^*$	–	1–7	1–3, 5–7
II ⁺	5.3	5.21	$[(\mathcal{PU})_\Gamma^* \circ \mathcal{C}_\Gamma^\oplus]^k \circ (\mathcal{PU})_\Gamma^*$	–	1–7	1–3, 5–7
II [–]		5.21	$[(\mathcal{PU})_\Gamma^* \circ \mathcal{C}_\Gamma^\ominus]^k \circ (\mathcal{PU})_\Gamma^*$	–	1–7	1–3, 5–7
III ⁺		5.22	$\mathcal{U}_\Gamma \circ \mathcal{P}_\Gamma^* \circ [\mathcal{C}_\Gamma^\oplus]^k$	–	1–5	1–3, 5
III [–]		5.23	$\mathcal{P}_\Gamma^* \circ [\mathcal{C}_\Gamma^\ominus]^k$	–	1–5	1–3, 5
IV	5.4.1	5.24	$\mathcal{N}_\Gamma \circ [\mathcal{D}_\Gamma^\circ]^k$	$\mathcal{P}_\Gamma$	1–5, 8	1–3, 5, 8
IV ⁺		5.26	$\mathcal{N}_\Gamma \circ [\mathcal{D}_\Gamma^\oplus]^k$	$\mathcal{P}_\Gamma$	1–5, 8–9	1–3, 5, 8–9
V		5.28	$\mathcal{N}_\Gamma \circ [\mathcal{P}_\Gamma^* \circ \mathcal{D}_\Gamma^\circ]^k \circ \mathcal{P}_\Gamma^*$	$\mathcal{P}_\Gamma$	1–8	1–3, 5–8
V ⁺		5.31	$\mathcal{N}_\Gamma \circ [\mathcal{P}_\Gamma^* \circ \mathcal{D}_\Gamma^\oplus]^k \circ \mathcal{P}_\Gamma^*$	$\mathcal{P}_\Gamma$	1–9	1–3, 5–9
VI	5.4.2	5.35	$[(\mathcal{PV})_\Gamma^* \circ \mathcal{D}_\Gamma^\circ]^k \circ (\mathcal{PV})_\Gamma^*$	–	1–8	1–3, 5–8
VI ⁺		5.37	$[(\mathcal{PV})_\Gamma^* \circ \mathcal{D}_\Gamma^\oplus]^k \circ (\mathcal{PV})_\Gamma^*$	–	1–9	1–3, 5–9
VI [–]		5.37	$[(\mathcal{PV})_\Gamma^* \circ \mathcal{D}_\Gamma^\ominus]^k \circ (\mathcal{PV})_\Gamma^*$	–	1–8	1–3, 5–8

Table 1. Summary of operational characterizations.

We observe that all successful coloring sequences enjoy properties 1–5. Properties 6 and 7 rely on exhaustive propagations, at least with operator $\mathcal{P}_\Gamma^*$. While Property 8 is guaranteed in all support-driven characterizations, Property 9 is only warranted when unicoloring with $\mathcal{D}_\Gamma^\oplus$. In fact, we see that exhaustive propagations moreover enforce that the respective properties (except for Property 4 and in one case Property 5) are also enjoyed by prefix sequences. That is, sequences satisfying the first two conditions, thus sharing the format $[O_2]^k \circ O_1$ for some combination of operators O_i for $i = 1, 2$. This is interesting from a computational point of view, since the more properties are enforced on partial colorings, the smaller is the overall search space. For brevity, we refrain from giving explicit theorems on prefix sequences (in addition to Theorem 5.18) in this paper, since their proofs are obtained in a straightforward way.

Finally, let us summarize the computational complexity of the various operators.

Theorem 5.38

Let Γ be the RDG of logic program Π and let C be a partial coloring of Γ .

If n is the number of rules in Π , then

1. $\mathcal{P}_\Gamma(C)$ is computable in $\mathcal{O}(n)$,
2. $\mathcal{P}_\Gamma^*(C)$ is computable in $\mathcal{O}(n)$,
3. $\mathcal{U}_\Gamma(C)$ is computable in $\mathcal{O}(n)$,
4. $(\mathcal{PU})_\Gamma^*(C)$ is computable in $\mathcal{O}(n^2)$,
5. $\mathcal{V}_\Gamma(C)$ is computable in $\mathcal{O}(n)$,
6. $(\mathcal{PV})_\Gamma^*(C)$ is computable in $\mathcal{O}(n^2)$,
7. $\mathcal{N}_\Gamma(C)$ is computable in $\mathcal{O}(n)$.

In view of this result, we can decide in polynomial time whether a coloring sequence is in accord with a particular characterization. Hence, a successful coloring sequence can be generated in nondeterministic polynomial time.

6 Fitting and Well-founded Semantics

Unlike answer sets semantics, other approaches rely on 3-valued models (or partial models). Such a model consists of three parts: a set of true atoms, a set of false atoms, and a set of unknown atoms. Accordingly, a 3-valued interpretation I is a pair (X, Y) where X and Y are sets of atoms with $X \cap Y = \emptyset$. That is, $L \in X$ means that L is true in I , while $L \in Y$ means that L is false in I . Otherwise, L is considered to be unknown in I . The most prominent among these semantics are due to Fitting (Fitting 2002; Ross 1992) and Van Gelder (van Gelder et al. 1991). In contrast to answers sets semantics, both aim at characterizing skeptical conclusions comprised in a single 3-valued model of the underlying program. Interestingly, this 3-valued model provides an approximation of answer sets semantics in the sense that all atoms true in a 3-valued model belong to all answer sets of a given program, and all false atoms are excluded from all answer sets.

Among both 3-valued semantics, less conclusions are obtained in Fitting's semantics. It can be defined by means of the following operator.

Definition 6.1

Let Π be a logic program and let X, Y be sets of atoms.

We define

$$\begin{aligned} \Phi_\Pi^+(X, Y) &= \{head(r) \mid r \in \Pi, body^+(r) \subseteq X, body^-(r) \subseteq Y\} \\ \Phi_\Pi^-(X, Y) &= \{q \mid \text{for all } r \in \Pi, \\ &\quad \text{if } head(r) = q, \text{ then } (body^+(r) \cap Y \neq \emptyset \text{ or } body^-(r) \cap X \neq \emptyset)\} . \end{aligned}$$

The pair mapping $\Phi_\Pi(X, Y) = (\Phi_\Pi^+(X, Y), \Phi_\Pi^-(X, Y))$ is often referred to as Fitting's operator (Fages 1994). Given that Φ_Π is monotonic, we may start with $(\emptyset, \emptyset)$ and iterate Φ_Π until its least fixpoint is reached. Iterated applications of Φ_Π are written as Φ_Π^i for $i \geq 0$, where $\Phi_\Pi^0(X, Y) = (X, Y)$ and $\Phi_\Pi^{i+1}(X, Y) = \Phi_\Pi \Phi_\Pi^i(X, Y)$ for $i \geq 0$. We denote this least fixpoint by $lfp(\Phi_\Pi)$. We have $lfp(\Phi_\Pi) = \Phi_\Pi^\omega(\emptyset, \emptyset) = \Phi_\Pi^n(\emptyset, \emptyset)$ for some $n < \omega$ because Π is finite.

For relating this operator to the ones on RDGs, we need the following definition.

Definition 6.2

Let Γ be the *RDG* of logic program Π and let C be a partial coloring of Γ .

We define

$$\begin{aligned} X_C &= \{head(r) \mid r \in C_{\oplus}\}, \\ Y_C &= \{q \mid \text{for all } r \in \Pi, \text{ if } head(r) = q, \text{ then } r \in C_{\ominus}\}. \end{aligned}$$

The pair (X_C, Y_C) is a 3-valued interpretation of Π .

We have the following result.

Theorem 6.1

Let Γ be the *RDG* of logic program Π .

If $C = \mathcal{P}_{\Gamma}^*((\emptyset, \emptyset))$, then $\Phi_{\Pi}^{\omega}(\emptyset, \emptyset) = (X_C, Y_C)$.

Note that $\mathcal{P}_{\Gamma}^*((\emptyset, \emptyset))$ as well as $\Phi_{\Pi}^{\omega}(\emptyset, \emptyset)$ always exists (Cf. Corollary 5.3).

For capturing other semantics, the construction $Cn(\Pi^X)$ is sometimes regarded as an operator $C_{\Pi}(X)$. The anti-monotonicity of C_{Π} implies that C_{Π}^2 is monotonic. As shown in (van Gelder 1993), different semantics are obtained by distinguishing different groups of (alternating) fixpoints of $C_{\Pi}^2(X)$. For instance, given a program Π , the least fixed point of C_{Π}^2 is known to amount to its *well-founded semantics*. Answer sets of Π are simply fixed points of C_{Π}^2 that are also fixed points of C_{Π} . The well-founded model can be characterized in terms of the least fixpoint of operator C_{Π}^2 . That is, the well-founded model of a program Π is given by the 3-valued interpretation $(lfp(C_{\Pi}^2), Atm \setminus C_{\Pi} lfp(C_{\Pi}^2))$. Hence, it is sufficient to consider the least fixpoint of C_{Π}^2 , since it determines the well-founded model. We therefore refer to the least fixpoint of C_{Π}^2 as the *well-founded set* of Π . The set $Atm \setminus C_{\Pi} lfp(C_{\Pi}^2)$ is usually referred to as the *unfounded set* of Π .

Concerning 3-valued interpretations we obtain the following definition of unfounded sets (according to (van Gelder et al. 1991)).

Definition 6.3

Let Π be a logic program and let Z be a set of atoms.

Furthermore, let (X, Y) be a 3-valued interpretation.

Then, Z is an unfounded set of Π wrt (X, Y) if each $q \in Z$ satisfies the following condition: For each $r \in \Pi$ with $head(r) = q$, one of the following conditions hold:

1. $body^+(r) \cap Y \neq \emptyset$ or $body^-(r) \cap X \neq \emptyset$;
2. there exists a $p \in body^+(r)$ such that $p \in Z$.

The greatest unfounded set of Π wrt (X, Y) , denoted $U_{\Pi}(X, Y)$, is the union of all sets that are unfounded wrt (X, Y) .

To begin with, we fix the relationship among greatest unfounded sets and maximal support graphs.

Theorem 6.2

Let Γ be the *RDG* of logic program Π and C be a partial coloring of Γ such that $C_{\ominus} \subseteq \overline{S}(\Gamma, C) \cup B(\Gamma, C)$.

Furthermore, let (V, E) be a maximal support graph of (Γ, C) for some $E \subseteq \Pi \times \Pi$.

Then, $(Atm \setminus head(V))$ is the greatest unfounded set of Π wrt (X_C, Y_C) .

This result can be expressed in terms of operator $\mathcal{U}_{\Gamma}$.

Corollary 6.3

Let Γ be the *RDG* of logic program Π and C be a partial coloring of Γ such that $C_{\ominus} \subseteq \overline{S}(\Gamma, C) \cup B(\Gamma, C)$.

If $C' = \mathcal{U}_{\Gamma}(C)$, then $(\text{Atm} \setminus \text{head}(\Pi \setminus C'_{\ominus}))$ is the greatest unfounded set of Π wrt (X_C, Y_C) .

Finally, we can express the well-founded semantics in terms of our operators in the following way.

Theorem 6.4

Let Γ be the *RDG* of logic program Π .

If $C = (\mathcal{PU})_{\Gamma}^*((\emptyset, \emptyset))$, then (X_C, Y_C) is the well-founded model of Π .

Hence, by Theorem 5.38, the well-founded model is computable in our approach in quadratic time in size of Π .

7 Discussion and related work

Our approach has its roots in earlier work (Linke and Schaub 1998; Linke and Schaub 2000), proposing *block graphs* as a tool for query-answering in default logic (Reiter 1980) and the underlying existence of extensions problem. Roughly speaking, these graphs are closely related to the blockage graphs introduced in Section 4 because both possess a single type of edges indicating blockage relations. Inspired by the distinction between supporting and blocking arcs made in (Papadimitriou and Sideri 1994), this has led to our approach to characterizing and computing answer sets; it provides the theoretical foundations of the *noMore* answer set programming system (Anger et al. 2002).

In this paper, we put forward the simple concept of a rule dependency graph (*RDG*) for capturing the interplay between rules inducing answer sets.^{19,20} Many other forms of dependency graphs can be found in the literature. For instance, dependency graphs (DGs) among predicate symbols were proposed in (Apt et al. 1987) for defining *stratified* programs. DGs among atoms can be defined analogously (Przymusiński 1988): The nodes of such graphs are atoms appearing in a program Π ; edges are distinguished similar to Definition 3.1, viz. $E_0 = \{(\text{head}(r), p) \mid r \in \Pi, p \in \text{body}^+(r)\}$ and $E_1 = \{(\text{head}(r), p) \mid r \in \Pi, p \in \text{body}^-(r)\}$. Originally, these edges are referred to as being positive and negative, respectively. Accordingly, a cycle is said to be negative if it contains some negative edge. With this, a program is *stratified* if its DG does not contain a negative cycle. Stratified logic programs have a unique answer set (Gelfond and Lifschitz 1988). Many other properties, obtained from the structure of the DG, were identified for investigating the consistency of Clark's completion (Clark 1978). In fact, it is shown in (Fages 1994) that most of them also guarantee the existence of answer sets. As discussed in (Costantini 2001), DGs do not allow for capturing answer set semantics of logic programs. The difficulty is that there are syntactically and semantically different programs having the same DG.

¹⁹ The definition of the *RDG* differs from that in (Linke 2001), whose practically motivated restrictions turn out to be superfluous from a theoretical perspective.

²⁰ Due to the aforementioned historical development, the *RDG* was in (Linke 2001; Linke et al. 2002) still referred to as “block graph”. We abandon the latter term in order to give the same status to support and blockage relations.

Among the more recent literature, we find (Dimopoulos and Torres 1996), where rule dependency graphs are defined for *reduced negative* programs. A program is *negative* if it includes only rules r where $body^+(r) = \emptyset$. Informally, a program is *reduced* if different rules $h_1 \leftarrow B, \dots, h_k \leftarrow B$ with same body B are merged into one rule $h_1 \wedge \dots \wedge h_k \leftarrow B$ where the head is a conjunction of atoms. When restricting our attention to negative programs with unique bodies, the graphs of (Dimopoulos and Torres 1996) amount to *RDGs* restricted to 1-edges. The following interesting results are shown in (Dimopoulos and Torres 1996) for reduced programs: Stable models (Gelfond and Lifschitz 1988), partial stable models (Saccà and Zaniolo 1990), and well-founded semantics (van Gelder et al. 1991) of reduced negative programs correspond to kernels, semi-kernels and the initial acyclic part of the corresponding *RDG*, respectively. General programs are dealt with by program transformations, turning general programs to reduced negative ones.

Another interesting and closely related graph-theoretical approach is described in (Brignoli et al. 1999; Costantini et al. 2002; Costantini and Proveti 2005). Although their primary focus lies on special negative programs, referred to as *kernel programs* (see below) their dependency graph can be defined in a general way. This approach relies on extended dependency graphs (EDG), whose nodes are given by the multi-set of rule heads together with atoms not appearing as heads. For a program Π , the set of vertices amounts to the set $\{(head(r), r) \mid r \in \Pi\} \cup \{(u, u) \mid u \notin head(\Pi)\}$. There is a positive edge (u, v) in the EDG if $u \in body^+(r)$ and $v = head(r)$ for some rule $r \in \Pi$; there is a negative edge (u, v) in the EDG if $u \in body^-(r)$. Hence EDGs and *RDGs* are generally different. For example, take program $\{r_a, r_b\} = \{a \leftarrow not\ b, b \leftarrow not\ a, not\ c\}$. Then the EDG of this program has three nodes a, b and c and three negative edges (b, a) , (a, b) and (c, b) , whereas the *RDG* has two nodes r_a and r_b and two edges (r_a, r_b) and (r_b, r_a) . *Kernel programs* are negative programs subject to the condition that each head atom must also appear as a body atom in the program and all atoms in the program must be undefined in its well-founded model. According to (Brignoli et al. 1999), every normal program can be transformed into some equivalent kernel program. In analogy to (Dimopoulos and Torres 1996), general programs are then dealt with through program transformations. Interestingly, it is shown in (Costantini et al. 2002) that EDGs and *RDGs* are isomorphic for kernel programs. EDGs are used in (Brignoli et al. 1999) to study properties of logic programs, like existence of answer sets. Furthermore, colorings of EDGs are used in (Brignoli et al. 1999) for characterizing answer sets of kernel programs. For kernel programs, these colorings correspond to the ones studied in Section 4 (because of the aforementioned isomorphism). Interestingly, (Brignoli et al. 1999) defines admissible colorings in terms of their “complements”. That is, informally in our terminology, a coloring C is *non-admissible* if for some u , either (i) $u \in C_\oplus$, and for some $(u, v) \in E_1$, $v \in C_\oplus$, or (ii) $u \in C_\ominus$ and for all $(u, v) \in E_1$, $v \in C_\ominus$. Then, C is admissible if it is not non-admissible. This definition is only concerned with blockage and thus applies to negative programs only. On the other hand, it is closely related to the concept of a blockage graph (cf. Definition 4.3). That is, in the case of negative programs, the blockage graph amounts to an admissibly colored EDG. To see this, compare the negation of Condition 2 and 3 in Corollary 4.9 with Condition (i) and (ii) above (while setting $S(\Gamma, C)$ to Π). A blockage graph may thus be regarded as a natural extension of the concept of blockage used in (Brignoli et al. 1999) from negative to general logic programs.

In all, the major difference between the two latter approaches (Dimopoulos and Torres 1996; Brignoli et al. 1999) and ours boils down to the indirect or direct treatment of positive body atoms, respectively. While our techniques are developed for full-fledged logic programs, (Dimopoulos and Torres 1996; Brignoli et al. 1999) advocate an initial transformation to negative programs, on which their methods are primarily defined. (Note that general logic programs cannot be reduced to negative ones in a modular way (Janhunen 2000).) Rather all our characterizations of answer sets in Section 4 stress the duality between supporting and blocking relations among rules. Finally, it is noteworthy that all three approaches address several rather different problems. While we are primarily interested in operational characterizations, the two other approaches address fundamental problems such as the existence of answer sets. In particular, they elaborate upon the graph-theoretical concept of negative programs. In this way, all approaches are nicely complementary to each other and therefore do largely benefit from each other. An overview over different graphs associated with logic programs can be found in (Costantini 2001).

We have introduced support graphs for capturing the inferential dependencies among rule heads and positive body atoms. In fact, support graphs may be seen as a (rule-oriented) materialization of the notion of a *well-supported* interpretation, or more precisely, its underlying well-founded partial order (cf. (Fages 1994)): An interpretation X is well-supported if there is a strict well-founded partial order $\prec$ on X such that for every $p \in X$ there is some $r \in R_\Pi(X)$ with $p = \text{head}(r)$ and $q \prec p$ for every $q \in \text{body}^+(r)$. An edge (r_1, r_2) in a support graph of a colored RDG corresponds to the pairs $\text{head}(r_2) \prec \text{head}(r_1)$ for $q \in \text{body}^+(r_2)$.

A major goal of our paper is to provide operational characterizations of answer sets that allow us to bridge the gap between formal yet static characterizations of answer sets and algorithms for computing them. For instance, in the seminal paper (Niemelä and Simons 1996) describing the approach underlying the `smodels` system, the characterization of answer sets is given in terms of so-called *full-sets* and their computation is directly expressed in terms of procedural algorithms. Our operational semantics aims at offering an intermediate stage that facilitates the formal elaboration of computational approaches. Our approach is strongly inspired by the concept of a derivation, in particular, that of an SLD-derivation (Lloyd 1987). This attributes our coloring sequences the flavor of a derivation in a family of calculi, whose respective set of inference rules correspond to the selection of operators. A resolution calculus for skeptical stable model semantics is given in (Bonatti 2001). Interestingly, this calculus is not derived from credulous inference; also, it does not need the given program to be instantiated before reasoning. Gentzen-style calculi for default logic (and thus implicitly also for logic programming) can be found in (Bonatti 1996; Bonatti and Olivetti 1997).

Regarding our modeling of operations, it is worth mentioning that one could also use total operations instead of partial ones. For instance, instead of defining $\mathbb{C}$ as a set of partial mappings, one could consider the set of a binary partitions of Π *plus* (Π, Π) as the representative for inconsistent colorings. For instance, $\mathcal{P}_\Gamma$ could then be defined as a mapping $\mathcal{P}_\Gamma : \mathbb{C} \rightarrow \mathbb{C} \cup \{(\Pi, \Pi)\}$, where (Π, Π) is obtained whenever $\mathcal{P}_\Gamma$ “detects” an inconsistency. Although such an approach seems natural in a logical setting, involving deductive closure, we put forward partial mappings in our abstract operational setting. In this way, an answer set exists iff there *exists* a corresponding coloring sequence. Accordingly, there

is no answer set iff there is no coloring sequence. This nicely corresponds to the concept of a derivation and notably avoids the distinction between coloring sequences leading to admissible and inconsistent colorings.

We have furthermore shown in Section 6 that particular operations correspond to Fitting's and well-founded semantics (Fitting 2002; van Gelder et al. 1991; Przymusiński 1990; Denecker et al. 2000). A stepwise characterization of both semantics was proposed in (Brass et al. 2001) by defining a confluent rewriting system. The rewrite of a program corresponds to a 3-valued interpretation in which all facts in the rewritten program are true and all atoms not appearing among the heads of the rewrite are false. All other atoms are undefined. The program transformations $\mapsto_P$ and $\mapsto_S$ delete atoms from the positive and negative part of the body, if they are true in the associated 3-valued interpretation. If a rule is transformed into a fact through these transformations, then this corresponds in our approach to coloring this rule with $\oplus$ by $\mathcal{P}_\Gamma$. Analogously, the transformations $\mapsto_N$ and $\mapsto_F$ delete rules which have atoms in their body being false in the 3-valued interpretation. These transformations correspond to coloring non-applicable rules with $\ominus$. In this way, the iterative application of these 4 transformations yields the least fixpoint of Fitting's operator. In view of Theorem 6.1, these 4 transformations have the same effect as operator $\mathcal{P}_\Gamma$. Another program transformation, viz. $\mapsto_L$, is introduced in (Brass et al. 2001) for 0-loop detection; thus allowing for computing the greatest unfounded set. This transformation is similar to operator $\mathcal{U}_\Gamma$. Taken together, $\mapsto_P, \mapsto_S, \mapsto_N, \mapsto_F, \mapsto_L$ form a confluent rewriting system, whose final rewrite corresponds to the well-founded model of the initial logic program.

Although we leave algorithmic and implementation issues to a companion paper, in particular those, dealing with our system **noMORE**, some remarks relating our approach to the ones underlying the answer set programming systems **d1v** (Eiter et al. 1999; **d1v** ; Leone et al. 2005) and **smodels** (**smodels** ; Niemelä and Simons 1996; Simons et al. 2002) are in order. A principal difference manifests itself in how choices are performed. While the two latter's choice is based on atoms occurring (negatively) in the underlying program, our choices are based on its rules. The former approach is per se advantageous whenever multiple rules share a common head. This is compensated in the **noMORE** system by additional propagation rules eliminating a rule from the inference process, once its head has been derived in an alternative way. From a general perspective, a rule-based choice can be regarded as a compound choice on atoms. That is, assigning a rule r a positive applicability status (via $\oplus$) corresponds to assigning all atoms in $head(r) \cup body^+(r)$ the value true and all atoms in $body^-(r)$ the value false. Conversely, assigning r a negative status of applicability (viz. $\ominus$) corresponds to assigning at least one atom in $body^+(r)$ the value false or one in $body^-(r)$ the value true. Only if all rules with the same head are colored with $\ominus$, a rule head can be assigned false. While this type of choice is realized by $\mathcal{C}_\Gamma^\circ$, the one by $\mathcal{D}_\Gamma^\circ$ is more restrictive since all atoms in $body^+(r)$ are known to be true. An advantage of the approach based on choice operator $\mathcal{D}_\Gamma^\circ$ is that we can guarantee the support of rules on the fly. The elimination of unsupported rules can then either be restricted to uncolored rules, as done with operator $\mathcal{V}_\Gamma$, or even done in a final step without further detection efforts by appeal to operator $\mathcal{N}_\Gamma$. Interestingly, the choice operator of **d1v** has also a support-driven flavor: When choosing a (negative) body literal q , one of the qualifying conditions is the existence of a rule r such that $q \in body^-(r)$ and $body^+(r) \subseteq I$, where I is the current partial

assignment.^{21,22} Unlike this, support checking is a recurring operation in the `smodels` system, similar to operator $\mathcal{U}_\Gamma$. On the other hand, this approach ensures that the `smodels` algorithm runs in linear space complexity, while a graph-based approach needs quadratic space in the worst case (due to its number of edges). Interestingly, `smodels`' implementation relies on a rule-head dependency graph, in which rules and atoms are connected via pointers. Such an investment in space pays off once one is able to exploit the additional structural information offered by a graph. First steps in this direction are made in (Linke 2003), where graph compressions are described that allow for conflating entire subgraphs into single nodes. Propagation is more or less done similarly in all three approaches. That is, all these systems follow the strategy coined in (Subrahmanian et al. 1995), namely "Answer Sets = Well-founded Semantics + Branch and Bound". `smodels` relies on computing well-founded semantics, whereas `dlv` uses Fitting's or well-founded semantics, depending on whether (in our terminology) the program's *RDG* contains 0-cycles or not (Calimeri et al. 2001). Also, both systems use back-propagation mechanisms. In `dlv`, this allows to mark atoms as being eventually true. Operators capturing `dlv`'s propagation operations are given in (Faber. 2002). Among them, operator T_Π amounts to our Operator $\mathcal{P}_\Pi$; others address the aforementioned back-propagation and propagation of "eventually true" atoms. In addition to the propagation operators discussed in Section 5, `noMore` also uses different types of back-propagation (Linke et al. 2002), including special treatment of integrity constraints, as well as operations for ignoring rules once their head has been established. What truly distinguishes `noMore`'s propagation operations is their support-preserving way in conjunction with choice operator $\mathcal{D}_\Gamma^\circ$ (cf. Property 8 in Theorem 5.25, 5.27, 5.30, 5.32, and 5.36).

		noMoRe									smodels			
		V			VI			VI+ h_{sm}						
n	chs	ass	time	chs	ass	time	chs	ass	time	chs	ass	time		
3	1	39	0.0	1	39	0.0	1	175	0.0	1	45	0.001		
4	13	240	0.0	12	241	0.01	5	710	0.03	5	381	0.0		
5	74	1430	0.06	64	1420	0.08	23	3918	0.23	26	2757	0.002		
6	468	9935	0.59	385	9687	0.71	119	24046	1.88	305	34202	0.019		
7	3370	78803	5.77	2676	75664	6.88	719	0.18M	16.98	4814	0.53M	0.319		
8	27480	0.70M	61.84	21259	0.67M	72.99	5039	1.47M	173.81	86364	9.17M	6.29		
9	0.25M	6.97M	730	0.19M	6.55M	849	40319	14M	3639	1.86M	197M	159		

Table 2. Results for computing **all** answer sets of the Hamiltonian cycle problem on complete graphs with n nodes. **Abbreviations:** chs for choices, ass for assignments, time for time in seconds, and M abbreviates millions.

²¹ Formally, I is a four-valued interpretation. Two further conditions qualify the (disjunctive) head and the negative body literals of the rule r depending on their truth values.

²² No support is taken into account by `dlv` when choosing a (positive) head literal.

		noMoRe									smodels		
	n	chs	V ass	time	chs	VI ass	time	chs	VI+ h_{sm} ass	time	chs	ass	time
	7	15	386	0.03	15	386	0.04	5	1075	0.13	30	4701	0.005
	8	21	639	0.06	21	639	0.07	6	1626	0.22	8	2941	0.003
	9	28	1000	0.11	28	1000	0.14	7	2368	0.4	48	12555	0.009
	10	36	1494	0.19	36	1494	0.24	8	3337	0.75	1107	193287	0.155
	11	45	2148	0.31	45	2148	0.57	9	4571	1.45	18118	2.81M	2.613
	12	55	2991	0.53	55	2991	1.01	10	6110	2.47	0.39M	56.6M	60
	13	66	4054	1.13	66	4054	1.62	11	7996	3.87	5.30M	721M	866
	14	78	5370	1.92	78	5370	2.47	12	10273	5.62	—	—	>2h
	15	91	6974	2.83	91	6974	3.47	13	12987	8.06	—	—	>2h
	16	105	8903	4.01	105	8903	4.86	14	16186	11.07	—	—	>2h
	17	120	11196	5.49	120	11196	6.58	15	19920	14.79	—	—	>2h
	18	136	13894	7.15	136	13894	8.62	16	24241	19.74	—	—	>2h

Table 3. Results for computing **one** answer set of the Hamiltonian cycle problem on complete graphs with n nodes (M abbreviates millions).

		noMoRe									smodels		
	n	chs	V ass	time	chs	VI ass	time	chs	VI+ h_{sm} ass	time	chs	ass	time
	4	289	5132	0.22	56	1357	0.09	8	2006	0.16	2	1532	0.001
	4	18	395	0.02	14	332	0.02	2	515	0.03	1	735	0.001
	4	396	5468	0.29	179	3776	0.28	11	1834	0.18	18	10393	0.007
	4	22	366	0.02	21	364	0.02	6	1000	0.08	3	1489	0.002
	4	118	2223	0.14	47	1227	0.11	13	2763	0.29	20	13525	0.008
	5	3765	54264	3.06	37	733	0.08	14	2721	0.29	6	4291	0.004
	5	1113	13535	1.08	93	1779	0.22	32	4929	1.1	2306	1.08M	0.775
	5	207	3340	0.17	74	1450	0.14	11	2611	0.29	4	2956	0.003
	5	1195	14780	1.14	191	5390	0.79	29	7773	1.64	201	98546	0.069
	5	4535	72129	4.91	505	15690	2.12	54	17425	3.66	82	60317	0.038
	6	359	6563	0.52	89	2174	0.47	346	76915	25.46	0.17M	95M	76
	6	1228	20970	1.64	261	6238	1.38	4419	1.06M	335	0.24M	214M	152
	6	1.71M	33M	3278	0.10M	3.18M	935	12608	4.2M	1537	—	—	>2h
	6	233	4937	0.38	158	3908	0.96	1161	0.27M	94	14	11841	0.01
	6	3237	41286	2.78	499	8336	1.94	57	9162	2.62	38	38277	0.025

Table 4. Results for computing **one** answer set of the Hamiltonian cycle problem on clumpy graphs with n clumps (M abbreviates millions).

Finally, let us underpin the potential of our approach by some indicative empirical results. For this purpose, we have chosen the Hamiltonian cycle problem on two different types of graphs, namely *complete* and so-called *clumpy graphs*, as put forward in (Ward and Schlipf 2003). This choice is motivated by the fact that — unlike most of the other known benchmark examples — Hamiltonian problems naturally lead to non-tight encod-

ings and thus comprise more complex support structures.²³ Each clumpy graph has a given number of clumps (sets of nodes) where nodes are connected with more edges than between clumps. That is, edges in clumpy graphs are distributed less uniform and solving Hamiltonian cycle problems becomes more difficult. All benchmark examples are included in the distribution of the **noMORE** system (**nomore**).

All presented experiments have been done under **Linux** (kernel 2.6) on a **Intel Pentium 4** processor with 2.26GHz and 512MB main memory. We have used **noMORE V1.0** (**nomore**) under **Eclipse Prolog** with *RDGs* (flag *asp_r* set) and **smodels** version 2.27 (**smodels**). Although we do not report it here, we have run the whole test series with **dlv** as well. We have not included the results because **dlv** outperforms **smodels** as well as **noMORE** on all problem instances as regards time. Furthermore, **dlv** does not report assignments and it has a different concept of choices than **smodels** and **noMORE**.

Tables 2 and 3 summarize the results for computing *all* and *one* answer set for Hamiltonian cycle problems on complete graphs with n nodes, respectively. Observe that, although the Hamiltonian cycle problem for complete graphs is easy solvable for humans, it is difficult for ASP solvers. The computation of all solutions reflects the system behavior on excessive backtracking.²⁴ Table 4 gives results for computing Hamiltonian cycles on clumpy graphs with n clumps; we have tested five different instances for each n . Each table reports the number of choices (*chs*), the number of assignments²⁵ (*ass*) and the consumed time in seconds (*time*) for each operational characterization of the **noMORE** and **smodels** systems. The first two operational characterizations V and VI correspond to the respective rows in Table 1, whereas VI+ h_{sm} indicates a modified version of VI comprising an **smodels**-like heuristic including lookahead. Observe that we compare a Prolog and a C++ implementation and thus the resulting time measurements should not be overrated. Instead the number of needed choices and assignments give a better indication for the relation of **noMORE** and **smodels**. Concerning choices and assignments, Table 2 shows that for computing all Hamiltonian cycles of complete graphs the **noMORE** strategy VI+ h_{sm} performs better than **smodels**. Further evidence for this is given in Table 3 where we are able to observe this phenomenon even by looking at time measurements (for $n \leq 11$).

The results for clumpy graphs in Table 4 demonstrate that **noMORE** behaves more uniform on those examples than **smodels**. For examples in the first three instances with six clumps **noMORE** needs at most 4419 choices whereas **smodels** needs at least 170000 choices. Furthermore, on the third instance **smodels** did not even get an answer set after more than two hours. On the other hand, even if there are examples where **smodels** needs less choices than **noMORE** we did not recognize such extreme outliers for **noMORE** as we did for **smodels** during our tests.

Comparing the three **noMORE** strategies among each other, we observe that the extension of strategy VI by an **smodels**-like heuristics including lookahead usually decreases the number of choices (except for clumpy graphs with $n = 6$). However, this does not necessarily lead to better performance in time, since the lookahead increases the number of

²³ Tight encodings for Hamiltonian problems were proposed in (Lin and Zhao 2003).

²⁴ We also ran test series on non-answer-set instances, namely, Hamiltonian cycle problems on bipartite graphs; the overall result was the same as obtained with the series reported here.

²⁵ For each change of the truth value of a atom and for each change of the color of a node in a *RDG* one assignment is counted in **smodels** and **noMORE**, respectively.

assignments. Similarly, we observe that strategy VI always makes fewer choices than strategy V. Again, this advantage does not always pay off as regards time, since the verification of support by operator $\mathcal{V}_\Gamma$ is more time consuming than applying operator $\mathcal{N}_\Gamma$.

We stress that these experiments have a purely indicative character; a systematic experimental evaluation is given in a companion paper. Nonetheless our experiments show prospects insofar as even a moderately optimized Prolog implementation of our strategies outperforms a state-of-the-art system on certain benchmarks. Even though many other benchmark problems are still solved much faster by the state-of-the-art solvers, a comparison of the number of choices reveals that our approach has no substantial disadvantages.

The fact that *dlv* deals with disjunctive programs makes many of its special features inapplicable in our setting of normal logic programs. Alternative approaches can be found in (Lin and Zhao 2004; *cmodels*), where answer sets are computed by means of SAT solvers. Algorithms and implementation techniques for computing well-founded semantics can be found among others in (Sagonas et al. 1996; Lonc and Truszczyński 2001).

8 Conclusion

We have elaborated upon rule dependency graphs (*RDGs*) and their colorings for characterizing and computing answer sets of logic programs. While *RDGs* determine the possible interplay among rules inducing answer sets, its colorings fix their concrete application status.

We have started by identifying graph structures that capture structural properties of logic programs and their answer sets. As a result, we obtain several characterizations of answer sets in terms of totally colored dependency graphs. All characterizations reflect the dichotomy among the notions of support and blockage. In fact, once a “recursive support” is established, this dichotomy allows for characterizing answer sets in terms of their generating or their non-generating rules. The notion of “recursive support” is captured by the graph-theoretical concept of a support graph, whose counterpart is given by the blockage graph. Unlike the basic set-theoretic concepts, these subgraphs do not reflect the aforementioned dichotomy in a fully symmetric way. This is because support graphs capture a global — since recursive — structure, whilst blockage graphs aim at a rather local structure, based on arc-wise constraints. Taken together, both subgraphs provide another characterization of answer sets. Interestingly, their existence is incrementally enforced whenever appropriate propagation operations are used during the coloring process.

To a turn, we build upon these basic graph-theoretical characterizations for developing an operational framework for non-deterministic answer set formation. The goal of this framework is to offer an intermediate stage between declarative characterizations of answer sets and corresponding algorithmic specifications. We believe that this greatly facilitates the formal elaboration of computational approaches. The general idea is to start from an uncolored *RDG* and to employ specific operators that turn a partially colored graph gradually in a totally colored one, finally representing an answer set. To this end, we have developed a variety of deterministic and non-deterministic operators. Different coloring sequences (enjoying different formal properties) are obtained by selecting different combinations of operators. Among others, we distinguish unicoloring and support-driven operational characterizations. In particular, we have identified the basic strategies employed

by the noMORE system as well as operations yielding Fitting's and well-founded semantics. Taken together, the last results show that noMORE's principal propagation operation amount to applying Fitting's operator, when using strategy IV in Table 1 or computing well-founded semantics, when applying strategy VI. Notably, the explicit detection of 0-loops can be avoided by employing a support-driven choice operation. More recent developments within noMORE, such as back-propagation, heuristics, and implementation details are dealt with in a companion paper. Generally speaking, noMORE is conceived as a parametric system that allows for choosing different strategies. The noMORE system is available at <http://www.cs.uni-potsdam.de/~linke/nomore>.

In fact, our operational framework can be seen as a "theoretical toolbox" that allows for assembling specific strategies for answer set formation. The algorithmic realization of our coloring sequences in terms of backtracking algorithms is rather straightforward. The interesting step is of course the implementation of choice operators. In principle, a choice is made from a set of rules, each of which may be attributed a (different) color. This leaves room for different implementations, inducing differently shaped search trees. A prototypical platform offering the described spectrum of operations can be downloaded at <http://www.cs.uni-potsdam.de/~konczak/system/gcasp>; a corresponding implementation in C++ is currently under development. In all, our elaboration has laid the basic formal foundation for computing answer sets by means of RDGs and their colorings. Current and future work mainly deals with further exploitation of the structural information offered by a graph-based approach. In another paper, we show how preferences among rules are easily incorporated as a third type of edges (Konczak et al. 2003b; Konczak et al. 2003a). Other work includes graph compressions allowing for collapsing entire subgraphs into single nodes (Linke 2003). Last but not least, our approach seems to be well-suited for debugging and profiling purposes. First, given that it relies on rules, the objects of computation are the same as the descriptive objects within the problem specification. Second, the underlying graph allows for a very natural visualization of computations. This has already led to a noMORE-specific profiler, described in (Bösel et al. 2004).

Acknowledgements We would like to thank Christian Anger, Philippe Besnard, Stefania Costantini, Martin Gebser, Susanne Grell, André Neumann, Tomi Janhunnen, Vladimir Sarsakov, Mirek Truszczyński, and the referees of (Konczak et al. 2003; Konczak et al. 2004) and in particular the ones of the given paper for many helpful discussions and constructive suggestions.

The authors were supported by the German Science Foundation (DFG) under grant FOR 375/1 and SCHA 550/6, TP C and by the IST programme of the European Commission, Future and Emerging Technologies under the IST-2001-37004 WASP project.

Appendix A Auxiliary results

In this section we want to provide theorems which are needed in the proofs. The first theorem gives an characterisation of answer sets in terms of generating rules which corresponds to $C_{\oplus}$ in our approach.

Theorem Appendix A.1

Let Γ be the *RDG* of logic program Π , let X be a set of atoms, and let C be a partial coloring of Γ .

Then, $X \in AS_{\Pi}(C)$ iff $(R_{\Pi}(X), \Pi \setminus R_{\Pi}(X)) \in AC_{\Pi}(C)$.

Theorem Appendix A.2

Let Π be a logic program and X be a set of atoms.

Then, X is an answer set of Π iff $X = Cn((R_{\Pi}(X))^{\emptyset})$.

If we have an answer set, the set of generating rules possesses an enumeration which will provide the support graph of a (colored) *RDG*.

Theorem Appendix A.3

Let Π be a logic program and X an answer set of Π . Then, there exists an enumeration $\langle r_i \rangle_{i \in I}$ of $R_{\Pi}(X)$ such that for all $i \in I$ we have $body^+(r_i) \subseteq head(\{r_j \mid j < i\})$.

Given an answer set $X \in AS_{\Pi}(C)$ of a partial coloring we observe that $head(C_{\oplus}) \subseteq X$. Furthermore, if C is total, the heads of all rules in $C_{\oplus}$ generates the answer set X .

Theorem Appendix A.4

Let Γ be the *RDG* of logic program Π and C be a partial coloring of Γ . Furthermore let $X \in AS_{\Pi}(C)$.

Then, $head(C_{\oplus}) \subseteq X$.

If C is admissible, then $head(C_{\oplus}) = X$.

An analog is observed with the set $C_{\ominus}$. If for some atom q all rules with q as head are in the set $C_{\ominus}$ then q is not in the answer set $X \in AS_{\Pi}(C)$.

Theorem Appendix A.5

Let Γ be the *RDG* of logic program Π and C be a partial coloring of Γ . Furthermore, let $X \in AS_{\Pi}(C)$ and $p \in Atm$.

If $\{r \in \Pi \mid head(r) = p\} \subseteq C_{\ominus}$ then $p \notin X$.

Given an answer set $X \in AS_{\Pi}(C)$ for a partial coloring where $C_{\oplus} = R_{\Pi}(X)$ and $C_{\ominus} = \emptyset$ then all rules which are blocked are obtained by the operator $\mathcal{P}_{\Gamma}$.

Theorem Appendix A.6

Let Γ be the *RDG* of logic program Π , X be an answer set of Π and C be a partial coloring of Γ such that $C_{\oplus} = R_{\Pi}(X)$ and $C_{\ominus} = \emptyset$. Furthermore, let C^X be a total coloring of Γ such that $\{X\} = AS_{\Pi}(C^X)$.

Then, $\mathcal{P}_{\Gamma}(C) = (C_{\oplus}, C'_{\ominus})$ where $B(\Gamma, C^X) \subseteq C'_{\ominus}$.

The next Theorem about monotonicity of 3-valued interpretations is used in the proofs of Section 6.

Theorem Appendix A.7

Let Γ be the *RDG* of logic program Π and C, C' be partial colorings of Γ .

If $C \sqsubseteq C'$ then $(X_C, Y_C) \subseteq (X_{C'}, Y_{C'})$.

Appendix B Inductive definitions

In this section we want to give the inductive definitions of our operators given in Section 5. We write $i < \omega$ for i being a finite natural number greater or equal than 0.

According to $\mathcal{P}_\Gamma^*$, we define $P(C)$ as $P(C) = \bigsqcup_{i < \omega} P^i(C)$ where

1. $P^0(C) = C$ and
2. $P^{i+1}(C) = \mathcal{P}_\Gamma(P^i(C))$ for $i < \omega$.

Clearly, $P^i(C) \sqsubseteq P^{i+1}(C)$ for all $i < \omega$. By using $\mathcal{P}_\Gamma$ in every iteration step, we have that $P^i(C)$ is always a partial coloring for $i < \omega$. Note that $P(C)$ not always exists. To see this, observe that $P^1(\{a \leftarrow \text{not } a\}, \emptyset)$ would be $(\{a \leftarrow \text{not } a\}, \{a \leftarrow \text{not } a\})$ which is not a partial coloring.

Theorem Appendix B.1

Let Γ be the RDG of logic program Π and C be a partial coloring of Γ .

Then,

1. if $AC_\Pi(C) \neq \emptyset$ then $P(C)$ exists,
2. $P(C)$ is a partial coloring,
3. $AC_\Pi(C) = AC_\Pi(P(C))$ and for all $i < \omega$ we have $X \in AS_\Pi(C)$ iff $X \in AS_\Pi(P^i(C))$ iff $X \in AS_\Pi(P(C))$,
4. $C \sqsubseteq P(C)$,
5. $P(C)$ closed under $\mathcal{P}_\Gamma$,
6. $P(C)$ is the $\sqsubseteq$ -smallest partial coloring closed under $\mathcal{P}_\Gamma$, and
7. $P(C) = \mathcal{P}_\Gamma^*(C)$.

According to $\mathcal{T}_\Gamma^*$, we define $T(C)$ as $T(C) = \bigsqcup_{i < \omega} T^i(C)$ where

1. $T^0(C) = C$ and
2. $T^{i+1}(C) = \mathcal{T}_\Gamma(T^i(C))$ for $i < \omega$.

Clearly, $T^i(C) \sqsubseteq T^{i+1}(C)$ for all $i < \omega$.

Theorem Appendix B.2

Let Γ be the RDG of logic program Π and C be a partial coloring of Γ .

Then,

1. $T(C)$ is a partial coloring,
2. $C \sqsubseteq T(C)$,
3. $T(C)$ closed under $\mathcal{T}_\Gamma$,
4. $T(C)$ is the $\sqsubseteq$ -smallest partial coloring closed under $\mathcal{T}_\Gamma$, and
5. $T(C) = \mathcal{T}_\Gamma^*(C)$.

According to $(\mathcal{PU})_\Gamma^*$, we define $PU(C)$ as $PU(C) = \bigcup_{i < \omega} PU^i(C)$ where

1. $PU^0(C) = C$ and
2. $PU^{i+1}(C) = \mathcal{U}_\Gamma(\mathcal{P}_\Gamma(PU^i(C)))$ for $i < \omega$.

Clearly, $PU^i(C) \sqsubseteq PU^{i+1}(C)$ for all $i < \omega$.

Theorem Appendix B.3

Let Γ be the *RDG* of logic program Π and C be a partial coloring of Γ .

Then,

1. If $AC_\Pi(C) \neq \emptyset$ then $PU(C)$ exists,
2. $PU(C)$ is a partial coloring,
3. $AC_\Pi(C) = AC_\Pi(PU(C))$ and for all $i < \omega$ we have $X \in AS_\Pi(C)$ iff $X \in AS_\Pi(PU^i(C))$ iff $X \in AS_\Pi(PU(C))$,
4. $C \sqsubseteq PU(C)$,
5. $PU(C)$ closed under $\mathcal{P}_\Gamma$ and $\mathcal{U}_\Gamma$,
6. $PU(C)$ is the $\sqsubseteq$ -smallest partial coloring closed under $\mathcal{P}_\Gamma$ and $\mathcal{U}_\Gamma$, and
7. $PU(C) = (\mathcal{PU})_\Gamma^*(C)$.

Analogous, we define $PV(C)$ as $PV(C) = \bigcup_{i < \omega} PV^i(C)$ where

1. $PV^0(C) = C$ and
2. $PV^{i+1}(C) = \mathcal{V}_\Gamma(\mathcal{P}_\Gamma(PV^i(C)))$ for $i < \omega$.

Clearly, $PV^i(C) \sqsubseteq PV^{i+1}(C)$ for all $i < \omega$.

Theorem Appendix B.4

Let Γ be the *RDG* of logic program Π and C be a partial coloring of Γ .

Then,

1. If $AC_\Pi(C) \neq \emptyset$ then $PV(C)$ exists,
2. $PV(C)$ is a partial coloring,
3. $AC_\Pi(C) = AC_\Pi(PV(C))$ and for all $i < \omega$ we have $X \in AS_\Pi(C)$ iff $X \in AS_\Pi(PV^i(C))$ iff $X \in AS_\Pi(PV(C))$,
4. $C \sqsubseteq PV(C)$,
5. $PV(C)$ closed under $\mathcal{P}_\Gamma$ and $\mathcal{V}_\Gamma$,
6. $PV(C)$ is the $\sqsubseteq$ -smallest partial coloring closed under $\mathcal{P}_\Gamma$ and $\mathcal{V}_\Gamma$, and
7. $PV(C) = (\mathcal{PV})_\Gamma^*(C)$.

Appendix C Proofs

We write $i < \omega$ for i being a finite natural number greater or equal than 0.

C.1 Section 3*Proof 3.1*

Let Γ be the *RDG* of logic program Π , C be a partial coloring of Γ and $X \in AS_\Pi(C)$. By Equation (8), we have $C_\oplus \subseteq R_\Pi(X)$ and by Theorem Appendix A.4 $head(C_\oplus) \subseteq X$.

1: Let $r \in S(\Gamma, C)$. By definition, for all $p \in body^+(r)$ there exists an $r' \in \Pi$ such that $(r', r) \in E_0$, $p = head(r')$ and $r' \in C_\oplus$. From $head(C_\oplus) \subseteq X$, we can reconclude that for each $p \in body^+(r)$, we have $p \in X$, and thus $body^+(r) \subseteq X$.

Conditions 2-4 follow analogous to Condition 1 by Theorem Appendix A.4 and Appendix A.5. $\square$

Proof 3.2

Let Γ be the *RDG* of logic program Π , C be an admissible coloring of Γ , and $\{X\} = AS_{\Pi}(C)$. By Equation (8) we have $C_{\oplus} = R_{\Pi}(X)$ and $head(C_{\oplus}) = X$ (Theorem Appendix A.4). By Theorem 3.1 we only have to show “ $\Rightarrow$ ”.

1 “ $\Rightarrow$ ”: Let be $body^+(r) \subseteq X = head(C_{\oplus})$ for $r \in \Pi$. Then, for each $p \in body^+(r)$ there exists an $r' \in \Pi$ such that $r' \in C_{\oplus}$ and $p = head(r')$. From the definition of the *RDG* we can conclude that $r \in S(\Gamma, C)$.

Conditions 2-4 follow analogous. $\square$

Proof 3.3

This theorem follows by Theorem 3.1, Corollary 3.2, and Equation (4). $\square$

C.2 Section 4

Proof 4.1

Let $\Gamma = (\Pi, E_0, E_1)$ be the *RDG* of logic program Π . Let (V'', E) and (V', E') be support graphs of Γ for some $E, E' \subseteq (\Pi \times \Pi)$ such that $V'' \neq V'$.

We show that there exists a support graph (V, E) of Γ for some $E \subseteq (\Pi \times \Pi)$ such that $V'' \subseteq V$ and $V' \subseteq V$. Since Π is finite and by finiteness of the number of support graphs, we then conclude that there exists a maximal support graph of Γ .

Trivially, according to Definition 4.1, there exists an enumeration $\langle r_i \rangle_{0 \leq i \leq n}$ of V'' such that $body^+(r_i) \subseteq \{head(r_j) \mid j < i\}$ and there exists an enumeration $\langle r'_i \rangle_{0 \leq i \leq m}$ of V' such that $body^+(r'_i) \subseteq \{head(r'_j) \mid j < i\}$.

The idea of the construction of (V, E) is as follows: we merge the vertices of V'' and V' to V and additionally include all vertices into V whose positive body is derivable by the heads of the rules belonging to V . More precisely, V should be closed under all rules whose positive body is derivable by the heads of rules in V .

Next, we define an enumeration $\langle s_i \rangle_{0 \leq i \leq k}$ of rules in Π inductively as follows. Let $s_0 = r \in \Pi$ where $body^+(r) = \emptyset$ and

$$s_i = r \in \Pi \text{ such that } body^+(r) \subseteq \{head(s_l) \mid l < i\}$$

for $0 \leq i \leq k$ and for some maximal k such that there exists no $r' \in \Pi \setminus \{s_0, \dots, s_k\}$ where $body^+(r') \subseteq \{head(s_l) \mid l \leq k\}$. Note that then the enumeration $\langle s_i \rangle_{0 \leq i \leq k}$ is maximal wrt vertices. Furthermore, we have $n \leq k, m \leq k$ and $n + m - |V'' \cap V'| \leq k$.

Next, we show that for $V = \{s_i \mid 0 \leq i \leq k\}$ the following conditions are fulfilled:

1. $V'' \subseteq V$,
2. $V' \subseteq V$,
3. for all $r \in \Pi$ if $body^+(r) \subseteq \{head(r') \mid r' \in V\}$ then $r \in V$, and
4. (V, E) is a support graph of Γ for some $E \subseteq (\Pi \times \Pi)$.

Condition 3 states that all rules whose positive body can be derived by the heads of the rules in V are included in V . Observe that if there is no $r \in \Pi$ such that $body^+(r) = \emptyset$ we have that then $V' = \emptyset$ and $V'' = \emptyset$ and hence, $V'' = V'$ which is a contradiction to the assumption $V'' \neq V'$.

1+2: Note that for non-empty V'' and non-empty V' we have $body^+(r_0) = \emptyset$ and

$body^+(r'_0) = \emptyset$ by construction of the enumerations of V'' and V' . Hence, there exist $0 \leq l, l' \leq k$ such that $r_0 = s_l$ and $r'_0 = s_{l'}$. Thus, we conclude by induction that $V'' \subseteq \{s_0, \dots, s_k\}$ (Condition 1) and $V' \subseteq \{s_0, \dots, s_k\}$ (Condition 2) by construction of V .

3: Condition 3 is fulfilled, since in we include as many rules as possible into $\langle s_i \rangle_{0 \leq i \leq k}$ (k being maximal).

4: For $0 < i \leq k$, we define

$$E^i = \bigcup \{(r', s_i) \mid r' \in \{s_0, \dots, s_{i-1}\}\} \cap E_0$$

and $E = \bigcup_{0 \leq i \leq k} E^i$. Clearly, (V, E) is 0-subgraph of Γ by construction. Furthermore, (V, E) is acyclic since there are only edges (s_j, s_i) where $j < i$ for $j, i \in \{0, \dots, k\}$. Also, we obtain $r \in V$ whenever $body^+(r) \subseteq \{head(r') \mid (r', r) \in E\}$. Thus, (V, E) is a support graph of Γ .

Hence, there exists a support graph (V, E) of Γ such that $V' \subseteq V$ for all support graphs (V', E') of Γ . $\square$

Proof 4.2

Let $\Gamma = (\Pi, E_0, E_1)$ be the RDG of logic program Π and C be a partial coloring of Γ .

We abbreviate $\Gamma|_{C_\oplus \cup C_\ominus}$ with $\Gamma|_C$.

1: If $AC_\Pi(C) \neq \emptyset$ then we have $AS_\Pi(C) \neq \emptyset$ by Theorem Appendix A.1. Let be $X \in AS_\Pi(C)$. Then, we have by definition that $C_\oplus \subseteq R_\Pi(X)$ and $C_\ominus \cap R_\Pi(X) = \emptyset$ hold. We want to construct a support graph $(R_\Pi(X), E)$ of (Γ, C) for some $E \subseteq (\Pi \times \Pi)$. Then, there exists a maximal support graph of (Γ, C) .

By Theorem Appendix A.3 we have an enumeration $\langle r_i \rangle_{i \in I}$ of $R_\Pi(X)$ such that for all $i \in I$ we have $body^+(r_i) \subseteq head(\{r_j \mid j < i\})$.

Define $V = \bigcup_{i \in I} \{r_i\}$ and $E = \{(r_j, r_i) \mid j < i\} \cap E_0$. Clearly, $V = R_\Pi(X)$ by construction and thus we have $C_\oplus \subseteq V$, $C_\ominus \cap V = \emptyset$, and (V, E) is a support graph of Γ . Furthermore, (V, E) is a support graph of (Γ, C) . The existence of a maximal one follows by Theorem 4.1.

2: Let $(C_\oplus, E')$ be a support graph of $\Gamma|_C$ for some $E' \subseteq (\Pi \times \Pi)$. Then, $(C_\oplus, E')$ is a support graph of (Γ, C) . By Theorem 4.1, there exists a (maximal) support graph of (Γ, C) . $\square$

Proof 4.3

Let Γ be the RDG of logic program Π and C be an admissible coloring. By $\{C\} = AC_\Pi(C) \neq \emptyset$ and Theorem 4.2, there exists a support graph of (Γ, C) . According to Definition 4.2, this must be $(C_\oplus, E)$ for some $E \subseteq \Pi \times \Pi$, since C is a total coloring. Furthermore, $(C_\oplus, E)$ is a maximal support graph of (Γ, C) . $\square$

Proof 4.4

Let Γ be the RDG of logic program Π and let C be a total coloring of Γ .

"1 $\Rightarrow$ 2": Since C is an admissible coloring, there exists an answer set X of Π such that $\{X\} = AS_{\Pi}(C)$. By Theorem 4.2 and $\{C\} = AC_{\Pi}(C)$ there exists a support graph of (Γ, C) . $C_{\oplus} = S(\Gamma, C) \cap \overline{B}(\Gamma, C)$ holds by Theorem 3.3 and $C_{\oplus} = R_{\Pi}(X)$.

"2 $\Rightarrow$ 1": We have to show that C is an admissible coloring that is $C_{\oplus} = R_{\Pi}(X)$ holds, where X is an answer set of Π .

Let X be the set of atoms such that $X = head(C_{\oplus})$, then

$$\begin{aligned} R_{\Pi}(X) &= \{r \mid body^+(r) \subseteq X, body^-(r) \cap X = \emptyset\} \\ &= \{r \mid body^+(r) \subseteq head(C_{\oplus}), body^-(r) \cap head(C_{\oplus}) = \emptyset\} \\ &= \{r \mid r \in S(\Gamma, C), r \in \overline{B}(\Gamma, C)\} \\ &= C_{\oplus}. \end{aligned}$$

By Theorem 4.6 and $(C_{\oplus}, E)$ is a (maximal) support graph of (Γ, C) for some $E \subseteq \Pi \times \Pi$ (Corollary 4.3), we have

$$\begin{aligned} head(C_{\oplus}) &= Cn((\Pi \setminus C_{\ominus})^{\emptyset}) \\ &= Cn(C_{\oplus}^{\emptyset}) \\ &= Cn((R_{\Pi}(X))^{\emptyset}). \end{aligned}$$

By $X = head(C_{\oplus}) = Cn((R_{\Pi}(X))^{\emptyset})$ we have by Theorem Appendix A.2 that X is an answer set. Hence, C is an admissible coloring.

"2 $\Leftrightarrow$ 3": This holds by C is a total coloring and by Theorem 3.3. $\square$

Proof 4.5

Let Γ be the *RDG* of logic program Π , C be a total coloring of Γ and X be a set of atoms such that $X = head(C_{\oplus})$.

We obtain for $r \in \Pi$,

$$\begin{aligned} r \in \overline{B}(\Gamma, C) &\text{ iff } body^-(r) \cap head(C_{\oplus}) = \emptyset \\ &\text{ iff } body^-(r) \cap X = \emptyset \\ &\text{ iff } head(r) \leftarrow body^+(r) \in \Pi^X. \end{aligned}$$

$\square$

Proof 4.6

Let Γ be the *RDG* of logic program Π , C be a partial coloring and (V, E) be a maximal support graph of (Γ, C) .

We have to show that $head(V) = Cn((\Pi \setminus C_{\ominus})^{\emptyset})$ holds. More precisely, we have to show that $head(V)$ is the smallest set of atoms which is closed under $(\Pi \setminus C_{\ominus})^{\emptyset}$.

First, we show that $head(V)$ is closed under $(\Pi \setminus C_{\ominus})^{\emptyset}$. That is, for any $r \in (\Pi \setminus C_{\ominus})^{\emptyset}$ we have $head(r) \in head(V)$ whenever $body^+(r) \subseteq head(V)$. Let be $r \in (\Pi \setminus C_{\ominus})^{\emptyset}$. If we have $body^+(r) \subseteq head(V)$ then we have $head(r) \in head(V)$ since the support graph (V, E) is maximal. Thus, $head(V)$ is closed under $(\Pi \setminus C_{\ominus})^{\emptyset}$.

Second, we show that $head(V)$ is the smallest set of atoms which is closed under $(\Pi \setminus$

$C_\ominus)^\emptyset$. Assume that $\text{head}(V)$ is not the smallest set of atoms which is closed under $(\Pi \setminus C_\ominus)^\emptyset$. Then, there exists a $q \in \text{head}(V)$ such that $\text{head}(V) \setminus q$ is closed under $(\Pi \setminus C_\ominus)^\emptyset$. We have $\text{head}(V) \setminus q = \text{head}(V \setminus Q)$ where $Q = \{r \mid \text{head}(r) = q, r \in V\}$. Moreover, we have for all $r^+ \in (\Pi \setminus C_\ominus)^\emptyset$ that $\text{head}(r^+) \in \text{head}(V \setminus Q)$ whenever $\text{body}^+(r^+) \subseteq \text{head}(V \setminus Q)$. Let be $r' \in Q$. By $r' \in V$ we have that r is a vertex in the maximal support graph of (Γ, C) . Hence, by Definition 4.2 we have that $\text{body}^+(r') \subseteq \text{head}(V)$. Moreover, we have $\text{body}^+(r') \subseteq \text{head}(V \setminus Q)$ since $Q = \{r \mid \text{head}(r) = q, r \in V\}$ and (V, E) is acyclic. Thus, we have that $\text{head}(r') \in \text{head}(V \setminus Q)$ by $\text{head}(V) \setminus q$ being closed under $(\Pi \setminus C_\ominus)^\emptyset$. But then we have $q = \text{head}(r') \in \text{head}(r) \setminus q$ which is a contradiction. Hence, $\text{head}(V)$ is the smallest set of atoms which is closed under $(\Pi \setminus C_\ominus)^\emptyset$. $\square$

Proof 4.7

Let Γ be the RDG for logic program Π and C be a total coloring of Γ .

" $\Rightarrow$ " Let C be an admissible coloring of Γ . By Theorem 4.4 we have that $C_\oplus = S(\Gamma, C) \cap \overline{B}(\Gamma, C)$ and there exists a support graph of (Γ, C) . By C is total we have that $(C_\oplus, E)$ is a support graph of (Γ, C) for some $E \subseteq \Pi \times \Pi$. Hence, $(C_\oplus, E)$ is a support graph of Γ . Since $C_\oplus \subseteq \overline{B}(\Gamma, C)$ we have that $(C_\oplus, E)$ is a support graph of $\Gamma|_{\overline{B}(\Gamma, C)}$. Next, we want to show the maximality of $(C_\oplus, E)$. Assume, $(C_\oplus, E)$ is not a maximal support graph of $\Gamma|_{\overline{B}(\Gamma, C)}$. Then, there exists an $r \in C_\ominus$ such that $(C_\oplus \cup \{r\}, E')$ is a support graph of $\Gamma|_{\overline{B}(\Gamma, C)}$ for some $E' \subseteq \Pi \times \Pi$. But then, $r \in \overline{B}(\Gamma, C)$ and $r \in S(\Gamma, C)$ by Definition 4.1 of a support graph of $\Gamma|_{\overline{B}(\Gamma, C)}$. Hence, $r \in S(\Gamma, C) \cap \overline{B}(\Gamma, C) = C_\oplus$. But this is a contradiction to $r \in C_\ominus$. Thus, $(C_\oplus, E)$ is a maximal support graph of $\Gamma|_{\overline{B}(\Gamma, C)}$.

" $\Leftarrow$ " Let $(C_\oplus, E)$ be a maximal support graph of $\Gamma|_{\overline{B}(\Gamma, C)}$ for some $E \subseteq (\Pi \times \Pi)$. By Theorem 4.4 we have to show that $C_\oplus = S(\Gamma, C) \cap \overline{B}(\Gamma, C)$ and there exists a support graph of (Γ, C) .

Since $(C_\oplus, E)$ is a support graph of $\Gamma|_{\overline{B}(\Gamma, C)}$ we have that $(C_\oplus, E)$ is a also support graph of Γ . Furthermore, $(C_\oplus, E)$ is a support graph of (Γ, C) since C is a total coloring.

It remains to show that $C_\oplus = S(\Gamma, C) \cap \overline{B}(\Gamma, C)$ holds.

" $\subseteq$ " Assume that there exists an $r \in C_\oplus$ such that $r \notin S(\Gamma, C) \cap \overline{B}(\Gamma, C)$. That is, $r \in \overline{S}(\Gamma, C) \cup B(\Gamma, C)$ holds. Since $(C_\oplus, E)$ is a support graph of $\Gamma|_{\overline{B}(\Gamma, C)}$, $r \in B(\Gamma, C) \cap C_\oplus$ is not possible. Assume that $r \in \overline{S}(\Gamma, C) \cap C_\oplus$. But by Definition 4.1 and $r \in C_\oplus$ which is in a support graph of $\Gamma|_{\overline{B}(\Gamma, C)}$, we have that $r \in S(\Gamma, C)$. But this is a contradiction and hence, we have $C_\oplus \subseteq S(\Gamma, C) \cap \overline{B}(\Gamma, C)$.

" $\supseteq$ " Assume there exists an $r \in S(\Gamma, C) \cap \overline{B}(\Gamma, C)$ such that $r \notin C_\oplus$ that is $r \in C_\ominus$ holds. If $r \in \overline{B}(\Gamma, C)$ then r is a vertex of the graph $\Gamma|_{\overline{B}(\Gamma, C)}$. If furthermore $r \in S(\Gamma, C)$ then r is a vertex of the maximal support graph of $\Gamma|_{\overline{B}(\Gamma, C)}$. Since $(C_\oplus, E)$ is a maximal support graph of $\Gamma|_{\overline{B}(\Gamma, C)}$, we have $r \in C_\oplus$. $\square$

Proof 4.8

Let $\Gamma = (\Pi, E_0, E_1)$ be the RDG of a logic program Π and let C be a total coloring of Γ .

“ $\Rightarrow$ ” Let C be an admissible coloring of Γ , then by Theorem 4.4 there exists a support graph of (Γ, C) . Hence, it remains to show, that $(S, E_1|_S)$ is a blockage graph of (Γ, C) where $S = S(\Gamma, C)$.

For all $r \in C_\oplus$ we have $r \in \overline{B}(\Gamma, C)$ by Theorem 4.4. Thus, Condition 1 for a blockage graph in Definition 4.3 holds.

Let be $r \in S \cap C_\ominus$. By $C_\ominus = \overline{S}(\Gamma, C) \cup B(\Gamma, C)$ we have that $r \in B(\Gamma, C)$. Hence, Condition 2 from Definition 4.3 holds. Thus, $(S, E_1|_S)$ is a blockage graph of (Γ, C) .

“ $\Leftarrow$ ” By Theorem 4.4 and the existence of a support graph of (Γ, C) it remains to show that $C_\oplus = S(\Gamma, C) \cap \overline{B}(\Gamma, C)$. Since C is total, the support graph of (Γ, C) must be $(C_\oplus, E)$ for some $E \subseteq \Pi \times \Pi$.

“ $\subseteq$ ”: Let be $r \in C_\oplus$. Then, we have $r \in S(\Gamma, C)$ by $(C_\oplus, E)$ is a support graph of (Γ, C) for some $E \subseteq (\Pi \times \Pi)$ and by Definition 4.2. Assume, we have $r \in B(\Gamma, C)$ then there exists an $r' \in C_\oplus$ such that $(r', r) \in E_1$. But this is a contradiction to Condition 1 in Definition 4.3 of a blockage graph. Thus, we have $r \in \overline{B}(\Gamma, C)$ and hence, we have $C_\oplus \subseteq S(\Gamma, C) \cap \overline{B}(\Gamma, C)$.

“ $\supseteq$ ”: Let be $r \in S(\Gamma, C) \cap \overline{B}(\Gamma, C)$. We have to show that $r \in C_\oplus$. Assume that we have $r \in C_\ominus$. Then, by Condition 2 in Definition 4.3 there exists an $r' \in C_\oplus$ such that r is blocked by r' . That's a contradiction and thus we have $r \in C_\oplus$. $\square$

Proof 4.9

Let $\Gamma = (\Pi, E_0, E_1)$ be the RDG of a logic program Π and let C be a total coloring of Γ .

To show this corollary we show the equivalence to the conditions given in Theorem 4.8. Clearly, a support graph of (Γ, C) is $(C_\oplus, E)$ for some $E \subseteq \Pi \times \Pi$ by Definition 4.2 since C is total. Furthermore, conditions 2 and 3 of this corollary are equivalent to conditions 1 and 2 in Definition 4.3 of a blockage graph. $\square$

C.3 Section 5

Proof 5.1

Let Γ be the RDG of logic program Π and C a partial coloring of Γ . If $AC_\Pi(C) \neq \emptyset$ then $AS_\Pi(C) \neq \emptyset$ by Theorem Appendix A.1. Let $X \in AS_\Pi(C)$ be an answer set of Π . Then $C_\oplus \subseteq R_\Pi(X)$ and $C_\ominus \cap R_\Pi(X) = \emptyset$.

Let be $S = S(\Gamma, C)$, $B = B(\Gamma, C)$, $\overline{S} = \overline{S}(\Gamma, C)$ and $\overline{B} = \overline{B}(\Gamma, C)$.

For showing that $\mathcal{P}_\Gamma(C)$ exists, we have to prove that $\mathcal{P}_\Gamma(C)$ is a partial coloring. We prove this by Theorem 3.3 and by the fact that C is a partial coloring. We observe

$$\begin{aligned}
 \mathcal{P}_\Gamma(C)_\oplus \cap \mathcal{P}_\Gamma(C)_\ominus &= (C_\oplus \cup (S \cap \overline{B})) \cap (C_\ominus \cup \overline{S} \cup B) \\
 &= (C_\oplus \cap C_\ominus) \cup (C_\oplus \cap \overline{S}) \cup (C_\oplus \cap B) \\
 &\quad \cup (S \cap \overline{B} \cap C_\ominus) \cup (S \cap \overline{B} \cap \overline{S}) \cup (S \cap \overline{B} \cap B) \\
 &= (C_\oplus \cap \overline{S}) \cup (C_\oplus \cap B) \cup (S \cap \overline{B} \cap C_\ominus) \\
 &= \emptyset.
 \end{aligned}$$

The last equality follows by Theorem 3.3. Thus, $\mathcal{P}_\Gamma(C)$ is a partial coloring and hence, $\mathcal{P}_\Gamma(C)$ exists. $\square$

Proof 5.2

This follows directly from Theorem Appendix B.1 by the existence of $P(C)$. $\square$

Proof 5.3

[Scetch] Let Γ be the RDG of logic program Π . We have to prove that $\mathcal{P}_\Gamma^*((\emptyset, \emptyset))$ exists. By Theorem Appendix B.1 it is enough to show that $P((\emptyset, \emptyset))$ exists.

Clearly, $P^0((\emptyset, \emptyset)) = (\emptyset, \emptyset)$ exists. Assuming that $P^i((\emptyset, \emptyset))$ exists, we have to show $\mathcal{P}_\Gamma(P^i((\emptyset, \emptyset)))_\oplus \cap \mathcal{P}_\Gamma(P^i((\emptyset, \emptyset)))_\ominus = \emptyset$ stating that $P^{i+1}((\emptyset, \emptyset))$ exists. But this holds if

$$P^i((\emptyset, \emptyset))_\oplus \cap \overline{S}(\Gamma, P^i((\emptyset, \emptyset))) = \emptyset \quad (\text{C1})$$

$$P^i((\emptyset, \emptyset))_\oplus \cap B(\Gamma, P^i((\emptyset, \emptyset))) = \emptyset \quad (\text{C2})$$

$$P^i((\emptyset, \emptyset))_\ominus \cap S(\Gamma, P^i((\emptyset, \emptyset))) \cap \overline{B}(\Gamma, P^i((\emptyset, \emptyset))) = \emptyset \quad (\text{C3})$$

We obtain $S(\Gamma, C) \subseteq S(\Gamma, C')$ and $\overline{B}(\Gamma, C) \subseteq \overline{B}(\Gamma, C')$ for all partial colorings C, C' such that $C \sqsubseteq C'$. Hence, we have $P^i((\emptyset, \emptyset))_\oplus \subseteq S(\Gamma, P^i((\emptyset, \emptyset))) \cap \overline{B}(\Gamma, P^i((\emptyset, \emptyset)))$. Thus, Equation C1 and analogously equations C2 and C3 hold. For this reason we have that $P^{i+1}((\emptyset, \emptyset))$ exists and, by induction, that $\mathcal{P}_\Gamma^*((\emptyset, \emptyset))$ exists. $\square$

Proof 5.4

Let Γ be the RDG of logic program Π and let C and C' be partial colorings of Γ such that $AC_\Pi(C') \neq \emptyset$. Furthermore, let be $C \sqsubseteq C'$. Then, we also have $AC_\Pi(C) \neq \emptyset$ by definition.

$\mathcal{P}_\Gamma(C) \sqsubseteq \mathcal{P}_\Gamma(C')$: It is easy to see that $C \sqsubseteq C'$ implies

1. $S(\Gamma, C) \subseteq S(\Gamma, C')$,
2. $\overline{S}(\Gamma, C) \subseteq \overline{S}(\Gamma, C')$,
3. $B(\Gamma, C) \subseteq B(\Gamma, C')$, and
4. $\overline{B}(\Gamma, C) \subseteq \overline{B}(\Gamma, C')$.

Thus, $\mathcal{P}_\Gamma(C) \sqsubseteq \mathcal{P}_\Gamma(C')$.

$\mathcal{P}_\Gamma^*(C) \sqsubseteq \mathcal{P}_\Gamma^*(C')$: This follows by showing $P(C) \sqsubseteq P(C')$ through an induction proof and by Theorem Appendix B.1. $\square$

Proof 5.5

Let Γ be the RDG of logic program Π and C be a partial coloring of Γ .

1: $C \sqsubseteq \mathcal{P}_\Gamma(C)$ implies $AC_\Pi(C) \supseteq AC_\Pi(\mathcal{P}_\Gamma(C))$. Thus, it remains to show $AC_\Pi(C) \subseteq AC_\Pi(\mathcal{P}_\Gamma(C))$. If $AC_\Pi(C) = \emptyset$ then $AC_\Pi(\mathcal{P}_\Gamma(C)) = \emptyset$ by $C \sqsubseteq \mathcal{P}_\Gamma(C)$ and by Equation (7).

Let be $C' = (R_\Pi(X), \Pi \setminus R_\Pi(X)) \in AC_\Pi(C)$ an admissible coloring of Γ for some answer set X of Π . We have to show that $\mathcal{P}_\Gamma(C)_\oplus \subseteq R_\Pi(X)$ and $\mathcal{P}_\Gamma(C)_\ominus \cap R_\Pi(X) = \emptyset$. But this holds by Theorem 3.3 and $C_\oplus \subseteq R_\Pi(X)$ and $C_\ominus \cap R_\Pi(X) = \emptyset$.

2: Holds by Theorem Appendix B.1. $\square$

Proof 5.6

Let $\Gamma = (\Pi, E_0, E_1)$ be the RDG of logic program Π and C be a partial coloring of Γ . Furthermore, let be $C' = \mathcal{P}_\Gamma(C)$.

1: Let $(C_\oplus, E)$ be a support graph of (Γ, C) for some $E \subseteq (\Pi \times \Pi)$. We have to show that $((\mathcal{P}_\Gamma^*(C))_\oplus, E')$ is a support graph of $(\Gamma, \mathcal{P}_\Gamma^*(C))$ for some $E' \subseteq (\Pi \times \Pi)$. We show this by construction of $((\mathcal{P}_\Gamma^*(C))_\oplus, E')$ and by Theorem Appendix B.1.

Let $V^0 = P^0(C)_\oplus = C_\oplus$ and $E^0 = E$. Assume that we have constructed the sets $V^i \subseteq \Pi$ and $E^i \subseteq (\Pi \times \Pi)$ for some $i < \omega$ such that $P^i(C)_\oplus = V^i$. Now, we want to construct the sets $V^{i+1} \subseteq \Pi$ and $E^{i+1} \subseteq (\Pi \times \Pi)$. We define

$$\begin{aligned} V^{i+1} &= V^i \cup \mathcal{P}_\Gamma(P^i(C))_\oplus \\ &= V^i \cup (S(\Gamma, P^i(C)) \cap \overline{B}(\Gamma, P^i(C))) \cup P^i(C)_\oplus \\ &= V^i \cup (S(\Gamma, P^i(C)) \cap \overline{B}(\Gamma, P^i(C))), \end{aligned}$$

$$E^{i+1} = E^i \cup (\{(r', r) \mid r' \in V^i, r \in V^{i+1}\} \cap E_0),$$

$V = \bigcup_{i < \omega} V^i$, and $E' = \bigcup_{i < \omega} E^i$. We have to show

(1a): $V = P(C)_\oplus$ and

(1b): (V, E') is a support graph of $(\Gamma, P(C))$.

Then, by Theorem Appendix B.1 we can conclude that $((\mathcal{P}_\Gamma^*(C))_\oplus, E')$ is a support graph of $(\Gamma, \mathcal{P}_\Gamma^*(C))$ for some $E' \subseteq (\Pi \times \Pi)$

(1a): This holds by construction of V .

(1b): Clearly, (V, E') is acyclic because E is acyclic and we have only edges from V^i to V^{i+1} for all $i < \omega$. Furthermore, (V, E') is a 0-subgraph of Γ by construction. Now, we have to show that for all $r \in V$ we have $\text{body}^+(r) \subseteq \{\text{head}(r') \mid (r', r) \in E'\}$. For $r \in V^0$ this holds by $(C_\oplus, E)$ is a support graph of (Γ, C) . For $r \in V^i \setminus V^{i-1}$ for some $i > 0$ we have $r \in S(\Gamma, P^i(C)) \cap \overline{B}(\Gamma, P^i(C))$. Thus, if we have $r \in S(\Gamma, P^i(C))$ and by Definition 3.2 and construction of E^{i+1} we have $\text{body}^+(r) \subseteq \{\text{head}(r') \mid (r', r) \in E^{i+1}\}$. Thus, $(\mathcal{P}_\Gamma^*(C)_\oplus, E')$ is a support graph of Γ .

2: Let $(C_\oplus \cup C_\ominus, E_1)|_{S(\Gamma, C)}$ be a blockage graph of (Γ, C) and $C_\oplus \subseteq S(\Gamma, C)$. We have to show that $(C'_\oplus \cup C'_\ominus, E_1)|_{S(\Gamma, C')}$ is a blockage graph of (Γ, C') where $C' = \mathcal{P}_\Gamma^*(C)$. That is, we have to show that

(2a): for all $r, r' \in C'_\oplus \cap S(\Gamma, C')$ we have $(r, r') \notin E_1|_{S(\Gamma, C')}$,

(2b): for all $r \in C'_\ominus \cap S(\Gamma, C')$ there exists an $r' \in C'_\oplus \cap S(\Gamma, C')$ such that $(r', r) \in E_1|_{S(\Gamma, C')}$.

But both conditions hold by C' being closed under $\mathcal{P}_\Gamma(C)$. $\square$

Proof 5.7

Let Γ be the RDG of logic program Π and let C be a total coloring of Γ .

" $\Rightarrow$ ": By Theorem 4.4 it remains to show that $C = \mathcal{P}_\Gamma(C)$. We have $\mathcal{P}_\Gamma(C) = C \sqcup (S(\Gamma, C) \cap \overline{B}(\Gamma, C), \overline{S}(\Gamma, C) \cup B(\Gamma, C))$. By Theorem 4.4 we have $C = (S(\Gamma, C) \cap \overline{B}(\Gamma, C), \overline{S}(\Gamma, C) \cup B(\Gamma, C))$ and thus, $C = \mathcal{P}_\Gamma(C)$.

" $\Leftarrow$ ": By Theorem 4.4 it remains to show, that $C_\oplus = S(\Gamma, C) \cap \overline{B}(\Gamma, C)$. By $C = \mathcal{P}_\Gamma(C)$ we have $C_\oplus \supseteq S(\Gamma, C) \cap \overline{B}(\Gamma, C)$. Now, we show $C_\oplus \subseteq S(\Gamma, C) \cap \overline{B}(\Gamma, C)$. Let $r \in C_\oplus$. If $r \in \overline{S}(\Gamma, C)$ or $r \in B(\Gamma, C)$, then $r \in C_\ominus$ by $C = \mathcal{P}_\Gamma(C)$, but this is a contradiction. Thus, $r \in S(\Gamma, C) \cap \overline{B}(\Gamma, C)$. For this reason, we have $C_\oplus = S(\Gamma, C) \cap \overline{B}(\Gamma, C)$. $\square$

Proof 5.8

Let Γ be the RDG of logic program Π and C be a partial coloring of Γ . If there exists a support graph of (Γ, C) , then there always exists a maximal support graph of (Γ, C) (Theorem 4.1). Thus, $\mathcal{U}_\Gamma(C)$ exists. $\square$

Proof 5.9

Let Γ be the RDG of logic program Π and let C and C' be partial colorings of Γ such that $AC_\Pi(C) \neq \emptyset$, $AC_\Pi(C') \neq \emptyset$.

Note that for C and C' , $\mathcal{U}_\Gamma(C)$ and $\mathcal{U}_\Gamma(C')$ exist by Corollary 5.8 and Theorem 4.2.

1: $C \sqsubseteq \mathcal{U}_\Gamma(C)$ holds by definition of $\mathcal{U}_\Gamma$.

2: Let (V, E) be a maximal support graph of (Γ, C) for some $E \subseteq \Pi \times \Pi$. Then, we have $\mathcal{U}_\Gamma(C) = (C_\oplus, \Pi \setminus V)$. We claim that (V, E) is also a maximal support graph of $(\Gamma, \mathcal{U}_\Gamma(C))$. To see this, observe that

1. (V, E) is a support graph of Γ ,
2. $\mathcal{U}_\Gamma(C)_\oplus \subseteq V$, and
3. $V \cap (\mathcal{U}_\Gamma(C))_\ominus = V \cap (\Pi \setminus V) = \emptyset$.

Furthermore, (V, E) is maximal since $V \cup (\mathcal{U}_\Gamma(C))_\ominus = V \cup (\Pi \setminus V) = \Pi$ and $V \cap (\mathcal{U}_\Gamma(C))_\ominus = \emptyset$. Therefore, we have

$$\begin{aligned} \mathcal{U}_\Gamma(\mathcal{U}_\Gamma(C)) &= (\mathcal{U}_\Gamma(C)_\oplus, \Pi \setminus V) \\ &= (C_\oplus, \Pi \setminus V) \\ &= \mathcal{U}_\Gamma(C). \end{aligned}$$

3: We have to show that $\mathcal{U}_\Gamma(C)_\oplus \subseteq \mathcal{U}_\Gamma(C')_\oplus$ and $\mathcal{U}_\Gamma(C)_\ominus \subseteq \mathcal{U}_\Gamma(C')_\ominus$. Since $C \sqsubseteq C'$ we have $\mathcal{U}_\Gamma(C)_\oplus \subseteq \mathcal{U}_\Gamma(C')_\oplus$. Because of $C \sqsubseteq C'$, we must have for a maximal support graph (V', E') of (Γ, C') and for a maximal support graph (V, E) of (Γ, C) that $V' \subseteq V$ for some $E, E' \in (\Pi \times \Pi)$. Thus, $\mathcal{U}_\Gamma(C)_\ominus \subseteq \mathcal{U}_\Gamma(C')_\ominus$ holds by definition of $\mathcal{U}_\Gamma$. $\square$

Proof 5.10

Let Γ be the RDG of logic program Π and C be a partial coloring of Γ .

Clearly, we have $C \sqsubseteq \mathcal{U}_\Gamma(C)$ by Thm. 5.9. Thus, we have $AC_\Pi(\mathcal{U}_\Gamma(C)) \subseteq AC_\Pi(C)$. It remains to show that $AC_\Pi(C) \subseteq AC_\Pi(\mathcal{U}_\Gamma(C))$. If $AC_\Pi(C) = \emptyset$ then $AC_\Pi(\mathcal{U}_\Gamma(C)) = \emptyset$ since $C \sqsubseteq \mathcal{U}_\Gamma(C)$ (Theorem 5.9). Let be $C' \in AC_\Pi(C)$, where $C' = (R_\Pi(X), \Pi \setminus$

$R_\Pi(X)$) for some answer set X of Π . Let (V, E) be a maximal support graph of (Γ, C) for some $E \subseteq (\Pi \times \Pi)$. The existence of (V, E) is ensured by Theorem 4.2. We have to show,

1. $\mathcal{U}_\Gamma(C)_\oplus \subseteq R_\Pi(X)$, and
2. $\mathcal{U}_\Gamma(C)_\ominus \cap R_\Pi(X) = \emptyset$.

1: This holds by $\mathcal{U}_\Gamma(C)_\oplus = C_\oplus \subseteq R_\Pi(X)$.

2: We have $\mathcal{U}_\Gamma(C)_\ominus = \Pi \setminus V$. Assume that there exists an $r \in (\Pi \setminus V) \cap R_\Pi(X)$. By $r \in R_\Pi(X)$ we have $r \in S(\Gamma, C')$ for $C' \in AC_\Pi(C)$. But this is a contradiction to $r \in (\Pi \setminus V)$ since all rules in $\Pi \setminus V$ can never be supported. Thus, $\mathcal{U}_\Gamma(C)_\ominus \cap R_\Pi(X) = \emptyset$ holds. $\square$

Proof 5.11

Let $\Gamma = (\Pi, E_0, E_1)$ be the RDG of logic program Π and C be a partial coloring of Γ . Furthermore, let $C' = \mathcal{U}_\Gamma(C)$. Condition 1 holds trivially since $C \sqsubseteq C'$ and $C'_\ominus \cap C_\oplus = \emptyset$. Condition 2 holds by $C'_\oplus = C_\oplus$ and by $(C'_\ominus \setminus C_\ominus) \cap S(\Gamma, C) = \emptyset$. $\square$

Proof 5.12

Let Γ be the RDG of logic program Π and let C be a total coloring of Γ .

To show this theorem we show the equivalence to Corollary 5.7.

" $\Rightarrow$ ": It remains to show that $C = \mathcal{U}_\Gamma(C)$. By Corollary 5.7, there exists a (maximal) support graph of (Γ, C) . That must be $(C_\oplus, E)$ for some $E \subseteq (\Pi \times \Pi)$ since C is a total coloring. Thus $\mathcal{U}_\Gamma(C) = (C_\oplus, \Pi \setminus C_\oplus) = C$.

" $\Leftarrow$ ": It remains to show that there exists a maximal support graph of (Γ, C) . But this exists by the existence of $\mathcal{U}_\Gamma$. $\square$

Proof 5.13

Let Γ be the RDG of logic program Π and let C be a total coloring of Γ .

" $\Rightarrow$ ": Let C be an admissible coloring of Γ . We have to show that there exists an sequence $(C^i)_{0 \leq i \leq n}$ satisfying the given conditions. Let $m = |C_\oplus|$ and $\langle r_i \rangle_{0 \leq i < m}$ be an arbitrary enumeration of $C_\oplus$. Analogous let $\langle r_j \rangle_{m \leq j < n}$ be an arbitrary enumeration of $\Pi \setminus C_\oplus = C_\ominus$. For $0 \leq i < m$ take $C^{i+1} = \mathcal{C}_\Gamma^\oplus(C^i) = (C_\oplus^i \cup \{r_i\}, C_\ominus^i)$ and for $m \leq i < n$ take $C^{i+1} = \mathcal{C}_\Gamma^\ominus(C^i) = (C_\oplus^i, C_\ominus^i \cup \{r_i\})$. Thus, C^n is a total coloring and conditions 3 and 4 are fulfilled by Corollary 5.12.

" $\Leftarrow$ ": By conditions 3, 4 and 5 we have $C = \mathcal{P}_\Gamma(C)$ and $C = \mathcal{U}_\Gamma(C)$. Thus, C is an admissible coloring of Γ by Corollary 5.12. $\square$

Proof 5.14

Let Γ be the RDG of logic program Π and let C be a total coloring of Γ .

Let $(C^i)_{0 \leq i \leq n}$ be a sequence satisfying conditions 1-5 in Theorem 5.13.

- 1: We have C^i is a partial coloring for $0 \leq i \leq n$ by Definition 5.4.
- 2: By construction of C^i and by Definition 5.4 we have $C^i \subseteq C^{i+1}$.
- 3: We have $C^i \subseteq C^{i+1}$ and thus we have $AC_\Pi(C^i) \supseteq AC_\Pi(C^{i+1})$.
- 4: Since we have $C = C^n \supseteq C^i$ for admissible coloring C , we have $C' \in AC_\Pi(C^i) \neq \emptyset$.
- 5: Because $AC_\Pi(C^i) \neq \emptyset$ we have by Theorem 4.2 that there exists a (maximal) support graph of (Γ, C^i) . $\square$

Proof 5.15

Let Γ be the RDG of logic program Π and let C be a total coloring of Γ .

" $\Leftarrow$ ": Since $(\mathcal{PU})_\Gamma^*$ is closed under $\mathcal{P}_\Gamma$ and $\mathcal{U}_\Gamma$ we have $C = \mathcal{P}_\Gamma(C)$ and $C = \mathcal{U}_\Gamma(C)$ and thus, we have that C is an admissible coloring of Γ by Corollary 5.12.

" $\Rightarrow$ ": Let $C = (R_\Pi(X), \Pi \setminus R_\Pi(X))$ be an admissible coloring of Γ for answer set X of Π . We have to show that there exists a sequence $(C^i)_{0 \leq i \leq n}$ satisfying the given conditions. Let $C^0 = (\mathcal{PU})_\Gamma^*((\emptyset, \emptyset))$. Assume, C^i is defined for some $0 \leq i$. Let be $r \in \Pi \setminus (C_\oplus^i \cup C_\ominus^i)$. If we have $r \in R_\Pi(X)$ then we take $C^{i+1} = (\mathcal{PU})_\Gamma^*(C_\oplus^i \cup \{r\}, C_\ominus^i)$. Otherwise, if we have $r \in \Pi \setminus R_\Pi(X)$ then we take $C^{i+1} = (\mathcal{PU})_\Gamma^*(C_\oplus^i, C_\ominus^i \cup \{r\})$. By construction there exists an $n < \omega$ such that $\Pi = C_\oplus^n \cup C_\ominus^n$. Furthermore, by Theorem 5.5, 5.10, and by construction of each C^{i+1} (for $0 \leq i < n$), we have that $C^n = C = (R_\Pi(X), \Pi \setminus R_\Pi(X))$. $\square$

Proof 5.16

Proof by induction over i by using Theorem Appendix B.3. $\square$

Proof 5.17

Let Γ be the RDG of logic program Π and let C be a total coloring of Γ .

Let $(C^i)_{0 \leq i \leq n}$ be a sequence satisfying conditions 1-3 in Theorem 5.15.

1-5: Hold analogous to Theorem 5.14 by Definition 5.4 and by Theorem Appendix B.3.

6+7: These conditions hold by definition of $\mathcal{P}_\Gamma$:

$$\begin{aligned} S(\Gamma, C^i) \cap \overline{B}(\Gamma, C^i) &\subseteq \mathcal{P}_\Gamma(C^i)_\oplus \subseteq (\mathcal{PU})_\Gamma^*(C_\Gamma^\circ(C^i))_\oplus = C_\oplus^{i+1}, \text{ and} \\ \overline{S}(\Gamma, C^i) \cup B(\Gamma, C^i) &\subseteq \mathcal{P}_\Gamma(C^i)_\ominus \subseteq (\mathcal{PU})_\Gamma^*(C_\Gamma^\circ(C^i))_\ominus = C_\ominus^{i+1}. \end{aligned}$$

$\square$

Proof 5.18

Condition 1–3, 6–7 hold analogous to Theorem 5.17. By C^i is closed under $\mathcal{U}_\Gamma$, there exists a support graph of (Γ, C^i) . Hence, Condition 5 holds. $\square$

Proof 5.19

Let Γ be the *RDG* of logic program Π .

First, we show that every sequence over $\mathbb{C}$ satisfying conditions 1 and 2 in Theorem 5.15 induces a sequence over $\mathbb{C}$ satisfying conditions 1-4 in Theorem 5.13.

Let $(C^i)_{i \in J}$ be a sequence satisfying conditions 1 and 2 in Theorem 5.15. We obtain an enumeration $\langle r_i \rangle_{i \in I}$ of Π such that we have: if $r_i \in PU^k(C^l)$, $r_j \in PU^e(C^f)$ where $l < f$ or $l = f$ and $k \leq e$ then $i < j$. Thus, we obtain a sequence $(C'^i)_{i \in J'}$ such that $C'^0 = (\emptyset, \emptyset)$ and

$$C'^{i+1} = \begin{cases} (C'^i_{\oplus} \cup \{r_i\}, C'^i_{\ominus}) & \text{if } r_i \in R_{\Pi}(X) \\ (C'^i_{\oplus}, C'^i_{\ominus} \cup \{r_i\}) & \text{if } r_i \notin R_{\Pi}(X). \end{cases}$$

$(C'^i)_{i \in J'}$ clearly satisfies conditions 1-4 in Theorem 5.13 by C^i is closed under $\mathcal{P}_{\Gamma}$ and $\mathcal{U}_{\Gamma}$ for every $i \in J$ in Theorem 5.15.

Second, 2 different sequences from Theorem 5.15 induces 2 different sequences in Theorem 5.13. Hence, $n \leq m$. $\square$

Proof 5.20

Let Γ be the *RDG* of logic program Π and let C be an admissible coloring of Γ .

Let $(C_1^i)_{0 \leq i \leq m}$ and $(C_2^j)_{0 \leq j \leq n}$ be the shortest sequences obtained for C according to Theorem 5.13 and Theorem 5.15, respectively. Since $|C_1^{i+1} \setminus C_1^i| = 1$ for all $0 \leq i < m$ and $|C_2^{j+1} \setminus C_2^j| \geq 1$ for all $0 \leq j < n$, we have that $n \leq m$ holds where $m = |\Pi|$. $\square$

Proof 5.21

Let Γ be the *RDG* of logic program Π and let C be a total coloring of Γ .

We have to prove:

Plus: C is an admissible coloring of Γ iff there exists a sequence $(C^i)_{0 \leq i \leq n}$ with the following properties:

1. $C^0 = (\mathcal{PU}_{\Gamma}^*((\emptyset, \emptyset)));$
2. $C^{i+1} = (\mathcal{PU}_{\Gamma}^*(C_{\Gamma}^{\oplus}(C^i)))$ for $0 \leq i < n$;
3. $C^n = C$.

Minus: C is an admissible coloring of Γ iff there exists a sequence $(C^i)_{0 \leq i \leq n}$ with the following properties:

1. $C^0 = (\mathcal{PU}_{\Gamma}^*((\emptyset, \emptyset)));$
2. $C^{i+1} = (\mathcal{PU}_{\Gamma}^*(C_{\Gamma}^{\ominus}(C^i)))$ for $0 \leq i < n$;
3. $C^n = C$.

'Plus':

" $\Leftarrow$ " C is an admissible coloring of Γ holds by Corollary 5.12 since C is closed under $\mathcal{P}_{\Gamma}$ and closed under $\mathcal{U}_{\Gamma}$.

" $\Rightarrow$ " Let $C = (R_\Pi(X), \Pi \setminus R_\Pi(X))$ be an admissible coloring of Γ for answer set X of Π . We have to show the existence of a sequence $(C^i)_{0 \leq i \leq n}$ with the given properties. Let $C^0 = (\mathcal{PU}_\Gamma^*((\emptyset, \emptyset)))$. For $0 < i < n$ let $C^{i+1} = (\mathcal{PU}_\Gamma^*(\mathcal{C}_\Gamma^\oplus(C^i)))$ where $\mathcal{C}_\Gamma^\oplus(C^i) = (C_\oplus^i \cup \{r\}, C_\ominus^i)$ for some $r \in R_\Pi(X) \cap (\Pi \setminus (C_\oplus^i \cup C_\ominus^i))$. It remains to show, that C^n is a total coloring and $C = C^n$ for some $n \geq 0$.

Assume, C^n is not total, then $\Pi \setminus (C_\oplus^n \cup C_\ominus^n) \not\subseteq R_\Pi(X)$. Otherwise, we could choose an $r \in R_\Pi(X)$ to extend our sequence of partial colorings. Then, for all $r \in \Pi \setminus (C_\oplus^n \cup C_\ominus^n)$ we have either $body^+(r) \not\subseteq X$ or $body^-(r) \cap X \neq \emptyset$. Observe that $X = head(C_\oplus^n) = head(R_\Pi(X))$ holds by X is an answer set. If there is an $r \in \Pi \setminus (C_\oplus^n \cup C_\ominus^n)$ such that $body^-(r) \cap X \neq \emptyset$, then r is blocked by some $r' \in C_\oplus^n$ and r had to be colored in C^n by C^n is closed under $\mathcal{P}_\Gamma$. Thus, $body^+(r) \not\subseteq X$ for all $r \in \Pi \setminus (C_\oplus^n \cup C_\ominus^n)$. Furthermore, all $r \in \Pi \setminus (C_\oplus^n \cup C_\ominus^n)$ are in a maximal support graph of (Γ, C^n) by C^n is closed under $\mathcal{U}_\Gamma$. Thus, there must exists an $r \in \Pi \setminus (C_\oplus^n \cup C_\ominus^n)$ such that $r \in S(\Gamma, C^n) \cap \overline{B}(\Gamma, C^n)$. But then, r would be colored in C^n by C^n is closed under $\mathcal{P}_\Gamma$. That's a contradiction. Thus, C^n is a total coloring. Furthermore, $C^n = C$ holds by C^n is closed under $\mathcal{P}_\Gamma$ and by Theorem 3.3.

'Minus':

" $\Leftarrow$ " C is an admissible coloring holds by Corollary 5.12 because C is closed under $\mathcal{P}_\Gamma$ and closed under $\mathcal{U}_\Gamma$.

" $\Rightarrow$ " Let $C = (R_\Pi(X), \Pi \setminus R_\Pi(X))$ be an admissible coloring for answer set X of Π . We have to show the existence of a sequence $(C^i)_{0 \leq i \leq n}$ satisfying '**Minus**'. Let $C^0 = (\mathcal{PU}_\Gamma^*((\emptyset, \emptyset)))$. For $0 < i < n$ let $C^{i+1} = (\mathcal{PU}_\Gamma^*(\mathcal{C}_\Gamma^\ominus(C^i)))$ where $\mathcal{C}_\Gamma^\ominus(C^i) = (C_\oplus^i, C_\ominus^i \cup \{r\})$ for some $r \in (\Pi \setminus R_\Pi(X)) \cap (\Pi \setminus (C_\oplus^i \cup C_\ominus^i))$. It remains to show, that C^n is a total coloring and $C^n = C$, but this can be shown analogous to '**Plus**'. $\square$

Proof 5.22

Let Γ be the RDG of logic program Π and C^X be a total coloring of Γ .

" $\Rightarrow$ ": Let $C^X = (R_\Pi(X), \Pi \setminus R_\Pi(X))$ be an admissible coloring of Γ for answer set X of Π . Clearly, C^X is a total coloring and $head(C_\oplus^X) = X$ by X is an answer set.

Let $|R_\Pi(X)| = n - 2$ and $\langle r_i \rangle_{0 \leq i < n-2}$ be an enumeration of $R_\Pi(X)$.

Given this, we define the sequence $(C^i)_{0 \leq i \leq n}$ such that

1. $C^0 = (\emptyset, \emptyset)$,
2. $C^{i+1} = (C_\oplus^i \cup \{r_i\}, C_\ominus^i)$ for $0 \leq i < n - 2$,
3. $C^{n-1} = \mathcal{P}_\Gamma^*(C^{n-2})$, and
- 3'. $C^n = \mathcal{U}_\Gamma(C^{n-1})$.

Clearly, this sequence satisfies conditions 1, 2, and 3 in Theorem 5.22.

Next, we show that C^n is a total coloring. More precisely, we show that $C^n = C^X$.

By definition, we have $C^{n-2} = (R_\Pi(X), \emptyset)$. By Theorem Appendix A.6 this implies

$$\mathcal{P}_\Gamma^*(C^{n-2}) = C^{n-1} = (R_\Pi(X), C_\ominus^{n-1}), \text{ where } B(\Gamma, C^X) \subseteq C_\ominus^{n-1}$$

by $\mathcal{P}_\Gamma(C^{n-2}) \sqsubseteq \mathcal{P}_\Gamma^*(C^{n-2})$.

By definition of C^X and Theorem 3.3, we have that $R_\Pi(X) = S(\Gamma, C^X) \cap \overline{B}(\Gamma, C^X)$. That is, we have

$$S(\Gamma, C^X) \cap \overline{B}(\Gamma, C^X) = C_\oplus^{n-1}.$$

Moreover, given that $B(\Gamma, C^X) \subseteq C_\ominus^{n-1}$, we obtain

$$S(\Gamma, C^X) \cap B(\Gamma, C^X) \subseteq C_\ominus^{n-1}.$$

Since C^X is a total coloring, we have $C^X = B(\Gamma, C^X) \cup \overline{B}(\Gamma, C^X)$. Consequently,

$$S(\Gamma, C^X) \subseteq C_\oplus^{n-1} \cup C_\ominus^{n-1} \quad \text{and also} \quad \Pi \setminus (C_\oplus^{n-1} \cup C_\ominus^{n-1}) \subseteq \overline{S}(\Gamma, C^X) \text{ holds.}$$

That is, all rules uncolored in C^{n-1} are also unsupported in C^X .

Clearly, $(C_\oplus^X, E)$ is a maximal support graph of (Γ, C^X) for some $E \subseteq (\Pi \times \Pi)$. Given that $C_\oplus^X = C_\oplus^{n-1}$ and $C_\ominus^X \setminus C_\ominus^{n-1} \subseteq \overline{S}(\Gamma, C^X)$, $(C_\oplus^X, E)$ is also a maximal support graph of (Γ, C^{n-1}) . We get

$$\begin{aligned} \mathcal{U}_\Gamma(C^{n-1}) &= (C_\oplus^{n-1}, (\Pi \setminus C_\oplus^X)) \\ &= (C_\oplus^X, (\Pi \setminus C_\oplus^X)) \\ &= (C_\oplus^X, C_\ominus^X) \\ &= C^X \end{aligned}$$

That is, we have $C^n = C^X$.

Therefore, we obtain that C^n is a total coloring.

" $\Leftarrow$ ": According to Corollary 5.12, it is sufficient to show that

1. $C = \mathcal{P}_\Gamma(C)$ and
2. $C = \mathcal{U}_\Gamma(C)$.

1: We have to show that

$$C = C \sqcup (S(\Gamma, C) \cap \overline{B}(\Gamma, C), \overline{S}(\Gamma, C) \cup B(\Gamma, C)).$$

For this, it is enough to show, that

$$(S(\Gamma, C) \cap \overline{B}(\Gamma, C), \overline{S}(\Gamma, C) \cup B(\Gamma, C)) \sqsubseteq C$$

that is

- (a) $S(\Gamma, C) \cap \overline{B}(\Gamma, C) \subseteq C_\oplus$ and
- (b) $\overline{S}(\Gamma, C) \cup B(\Gamma, C) \subseteq C_\ominus$.

(a): Assume there exists an $r \in S(\Gamma, C) \cap \overline{B}(\Gamma, C)$ such that $r \in C_\ominus$. We have 2 cases where r had to be colored in the sequence $(C^i)_{0 \leq i \leq n}$.

Case 1: $r \in \mathcal{P}_\Gamma^*(C^{n-2})_\ominus$ and $r \notin C_\ominus^{n-2}$ or

Case 2: $r \in \mathcal{U}_\Gamma(\mathcal{P}_\Gamma^*(C^{n-2}))_\ominus$ and $r \notin \mathcal{P}_\Gamma^*(C^{n-2})_\ominus$.

In **Case 1** we have $r \in \mathcal{P}_\Gamma^*(C^{n-2})_\ominus = P(C^{n-2})_\ominus$ by Theorem Appendix B.1. Thus, there exists an $i < \omega$ such that $r \in \overline{S}(\Gamma, P^i(C^{n-2})) \cup B(\Gamma, P^i(C^{n-2}))$. By $P^i(C') \sqsubseteq P(C')$

we have $r \in \overline{S}(\Gamma, C) \cup B(\Gamma, C)$, but this is a contradiction. to $r \in S(\Gamma, C) \cap \overline{B}(\Gamma, C)$.

In **Case 2** we have $r \in \mathcal{U}_\Gamma(\mathcal{P}_\Gamma^*(C^{n-2}))_\ominus$. Let (V, E) be a maximal support graph of $(\Gamma, \mathcal{P}_\Gamma^*(C^{n-2}))$ for some $E \subseteq (\Pi \times \Pi)$. Then, we have $r \in \Pi \setminus V$. By $r \in S(\Gamma, C)$ and $C_\oplus = \mathcal{U}_\Gamma(\mathcal{P}_\Gamma^*(C^{n-2}))_\oplus = \mathcal{P}_\Gamma^*(C^{n-2})_\oplus$, we have $r \in S(\Gamma, \mathcal{P}_\Gamma^*(C^{n-2}))$. But then, we have $r \in V$ by V being maximal. Also, this is a contradiction and thus, we have $r \in C_\oplus$.

(b): Let be $r \in B(\Gamma, C)$ and $r \in C_\oplus$. There are 2 cases where r had to be colored with $\oplus$.

Case 1: $r \in C_\oplus^{n-2}$ or

Case 2: $r \in \mathcal{P}_\Gamma^*(C^{n-2})$ and $r \notin C_\oplus^{n-2}$.

In both cases we have $r \in B(\Gamma, \mathcal{U}_\Gamma(\mathcal{P}_\Gamma^*(C^{n-2})))$. By $\mathcal{U}_\Gamma(\mathcal{P}_\Gamma^*(C^{n-2}))_\oplus = \mathcal{P}_\Gamma^*(C^{n-2})_\oplus$ we have $r \in B(\Gamma, \mathcal{P}_\Gamma^*(C^{n-2}))$. Hence, we must have $r \in \mathcal{P}_\Gamma^*(C^{n-2})_\ominus \subseteq C_\ominus$ by $\mathcal{P}_\Gamma^*$ is closed under $\mathcal{P}_\Gamma$. This is a contradiction.

Let be $r \in \overline{S}(\Gamma, C)$ and $r \in C_\oplus$. Then, we have $r \in \overline{S}(\Gamma, \mathcal{U}_\Gamma(\mathcal{P}_\Gamma^*(C^{n-2})))$. By Theorem 5.9 and $r \in \mathcal{U}_\Gamma(\mathcal{U}_\Gamma(\mathcal{P}_\Gamma^*(C^{n-2})))_\ominus$ we have $r \in \mathcal{U}_\Gamma(\mathcal{P}_\Gamma^*(C^{n-2}))_\ominus$. But, this is a contradiction to $r \in C_\oplus$.

2: $C = \mathcal{U}_\Gamma(C)$ is equivalent to $\mathcal{U}_\Gamma(C') = \mathcal{U}_\Gamma(\mathcal{U}_\Gamma(C'))$ for $C' = \mathcal{P}_\Gamma^*(C^{n-2})$, which is true by virtue of Theorem 5.9. $\square$

Proof 5.23

Let Γ be the RDG of logic program Π and let C be a total coloring of Γ .

" $\Rightarrow$ ": Let $C = (R_\Pi(X), \Pi \setminus R_\Pi(X))$ be an admissible coloring of Γ for answer set X of Π . We want to construct a sequence $(C^i)_{0 \leq i \leq n}$ with the given properties.

Let $\langle r_i \rangle_{1 \leq i \leq n-1}$ be an enumeration of $\Pi \setminus R_\Pi(X)$ where $n-1 = |\Pi \setminus R_\Pi(X)|$. Let be $C^0 = (\emptyset, \emptyset)$. For $1 \leq i \leq n-1$ let be $C^i = (C_\oplus^{i-1}, C_\ominus^{i-1} \cup \{r_i\})$. Then, we have $C^{n-1} = (\emptyset, \Pi \setminus R_\Pi(X))$. Note that by Theorem 5.2 and by $C \in AC_\Pi(C^{n-1})$ we have that $C^n = \mathcal{P}_\Gamma^*(C^{n-1})$ is a partial coloring.

It remains to show, that $C = C^n$ where $C^n = \mathcal{P}_\Gamma^*(C^{n-1})$. More precisely, we have to show for all $r \in \Pi$:

1. If $r \in R_\Pi(X)$ then $r \in C_\oplus^n = \mathcal{P}_\Gamma^*(C^{n-1})_\oplus$.
2. If $r \notin R_\Pi(X)$ then $r \in C_\ominus^n = \mathcal{P}_\Gamma^*(C^{n-1})_\ominus$.

1: Let be $r \in R_\Pi(X)$, then we have $\text{body}^-(r) \cap X = \emptyset$. By $X = \text{head}(R_\Pi(X))$ we have $\text{body}^-(r) \cap \text{head}(R_\Pi(X)) = \emptyset$. Thus, we have $r \in \overline{B}(\Gamma, C^{n-1})$. By Theorem Appendix A.3, there exists an enumeration of $\langle r_i \rangle_{i \in I}$ of $R_\Pi(X)$ such that for all $i \in I$ we have $\text{body}^+(r_i) \subseteq \text{head}(\{r_j \mid j < i\})$. Clearly, we have $r_0 \in S(\Gamma, C^{n-1})$. Hence, we have $r_0 \in C_\oplus^n$. By induction over $i \in I$ we can show that $r_i \in S(\Gamma, (C_\oplus^{n-1} \cup \{r_j \mid j < i\}, C_\ominus^{n-1}))$. Thus, $r \in C_\oplus^n$ whenever $r \in R_\Pi(X)$.

2: This follows by $\Pi \setminus R_\Pi(X) = C_\ominus^{n-1}$.

Hence, we conclude that $C^n = C$ holds.

" $\Leftarrow$ ": Let $(C^i)_{0 \leq i \leq n}$ be a sequence with the given properties. By Corollary 5.12 we have to show

1. $C^n = \mathcal{P}_\Gamma(C^n)$ and
2. $C^n = \mathcal{U}_\Gamma(C^n)$.

1: This condition is fulfilled by $C^n = \mathcal{P}_\Gamma^*(C^{n-1})$ and by $\mathcal{P}_\Gamma^*$ being closed under $\mathcal{P}_\Gamma$.

2: By $C^n = \mathcal{P}_\Gamma^*(C^{n-1})$ and $(\emptyset, \emptyset)$ is a support graph of $(\Gamma, (\emptyset, \Pi \setminus R_\Pi(X)))$ and Theorem 5.6 we have that $(C_\oplus^n, E)$ is a support graph of (Γ, C) for some $E \subseteq (\Pi \times \Pi)$. Then, $(C_\oplus^n, E)$ is a maximal support graph of (Γ, C) and $C^n = \mathcal{U}_\Gamma(C^n)$ by C^n is a total coloring and $C_\ominus^n = \Pi \setminus R_\Pi(X)$. $\square$

Proof 5.24

Let $\Gamma = (\Pi, E_0, E_1)$ be the RDG of logic program Π and let C be a total coloring of Γ .

" $\Rightarrow$ ": This follows analogous to the proof " $\Rightarrow$ " of Corollary 5.26.

" $\Leftarrow$ ": This follows analogous to the proof of Theorem 5.26 by verifying the construction of the maximal support graph of (Γ, C) as follows:

Let $R_i = C_\oplus^{i+1} \setminus C_\oplus^i$ for $0 \leq i < n-1$. Let $V^0 = \{r_0\}$ and $E^0 = \emptyset$. Assume, $V^i \subseteq \Pi$ and $E^i \subseteq \Pi \times \Pi$ are defined for some $0 \leq i < n-1$. Define $V^{i+1} = V^i \cup \{R_i\}$ and $E^{i+1} = E^i \cup E^{R_i}$ where

$$E^{R_i} = \begin{cases} \{(r', r_{i+1}) \mid r' \in V^i\} \cap E_0 & \text{if } R_i = \{r_{i+1}\} \text{ for some } r_{i+1} \in \Pi \\ \emptyset & \text{if } R_i = \emptyset. \end{cases}$$

$\square$

Proof 5.25

These properties follow analogous to Theorem 5.27 with the modification given in Theorem 5.24 in the construction of the support graph of (Γ, C^i) for $0 \leq i \leq n$. $\square$

Proof 5.26

Let $\Gamma = (\Pi, E_0, E_1)$ be the RDG of logic program Π and let C be a total coloring of Γ .

" $\Rightarrow$ ": Let $C = (R_\Pi(X), \Pi \setminus R_\Pi(X))$ be an admissible coloring of Γ for answer set X of Π . By Theorem Appendix A.3 there exists an enumeration $\langle r_i \rangle_{0 \leq i < n-1}$ of $R_\Pi(X)$ such that for all $i \in \{0, \dots, n-2\}$ we have $\text{body}^+(r_i) \subseteq \text{head}(\{r_j \mid j < i\})$. We define the sequence $(C^i)_{0 \leq i \leq n}$ as follows:

1. $C^0 = (\emptyset, \emptyset)$,
2. $C^{i+1} = (C_\oplus^i \cup \{r_i\}, C_\ominus^i)$ for $0 \leq i < n-1$,
3. $C^n = \mathcal{N}_\Gamma(C^{n-1})$.

By construction and by definition of $\mathcal{N}_\Gamma$, we have that C^n is a total coloring, $C_\oplus^n = R_\Pi(X)$, and $C_\ominus^n = \Pi \setminus R_\Pi(X)$. By definition of C^{i+1} for $0 \leq i < n-1$ we have $C^{i+1} = \mathcal{D}_\Gamma^\oplus(C^i)$ because $r_i \in S(\Gamma, C^i)$ by Theorem Appendix A.3. Thus, it remains to show that $C^n = \mathcal{P}_\Gamma(C^n)$. $C^n \subseteq \mathcal{P}_\Gamma(C^n)$ holds by definition of $\mathcal{P}_\Gamma$. Hence, it is enough to show that

1. $S(\Gamma, C^n) \cap \overline{B}(\Gamma, C^n) \subseteq C_{\oplus}^n$ and
2. $\overline{S}(\Gamma, C^n) \cup B(\Gamma, C^n) \subseteq C_{\ominus}^n$.

By Theorem 3.3 we have, if $r \in S(\Gamma, C^n) \cap \overline{B}(\Gamma, C^n)$ then $r \in R_{\Pi}(X) = C_{\oplus}^n$ and if $r \in \overline{S}(\Gamma, C^n) \cup B(\Gamma, C^n)$ then $r \in (\Pi \setminus R_{\Pi}(X)) = C_{\ominus}^n$. Thus, $C^n = \mathcal{P}_{\Gamma}(C^n)$ and $C^n = C$.

" $\Leftarrow$ ": By Corollary 5.7 we have to show

1. $C = \mathcal{P}_{\Gamma}(C)$ and
2. there is a support graph of (Γ, C) .

$C = \mathcal{P}_{\Gamma}(C)$ holds by property 4 and 5 of the defined sequence $(C^i)_{0 \leq i \leq n}$ in Theorem 5.24.

Now, we want to construct by induction a support graph $(C_{\oplus}^n, E)$ of (Γ, C) for some $E \subseteq \Pi \times \Pi$. Let $\{r_i\} = C_{\oplus}^{i+1} \setminus C_{\oplus}^i$ for $0 \leq i < n-1$. Let $V^0 = \{r_0\}$ and $E^0 = \emptyset$. Assume, $V^i \subseteq \Pi$ and $E^i \subseteq \Pi \times \Pi$ are defined for some $0 \leq i < n-1$. Define $V^{i+1} = V^i \cup \{r_{i+1}\}$ and $E^{i+1} = E^i \cup E^{r_{i+1}}$ where

$$E^{r_{i+1}} = \{(r', r_{i+1}) \mid r' \in V^i\} \cap E_0.$$

Let $V = \bigcup_{i < \omega} V^i$ and $E = \bigcup_{i < \omega} E^i$, then (V, E) is a support graph of (Γ, C) where $V = C_{\oplus}^n$. Hence, C is an admissible coloring of Γ . $\square$

Proof 5.27

Given the same prerequisites as in Corollary 5.26 with $\Gamma = (\Pi, E_0, E_1)$. Let $(C^i)_{0 \leq i \leq n}$ be a sequence satisfying conditions 1-5 in Corollary 5.26.

1-5: Hold analogous to Theorem 5.14.

8: This follows analogous to the construction of a support graph of (Γ, C) in Corollary 5.26.

9: We have to prove

- (9a)** for all $r, r' \in C_{\oplus}^i \cap S(\Gamma, C^i)$ we have $(r, r') \notin E_1|_{S(\Gamma, C^i)}$,
(9b) for all $r \in S(\Gamma, C^i) \cap C_{\ominus}^i$ exists an $r' \in C_{\oplus}^i \cap S(\Gamma, C^i)$ such that $(r', r) \in E_1|_{S(\Gamma, C^i)}$.

(9a): Let be $r, r' \in C_{\oplus}^i \cap S(\Gamma, C^i)$. Assume that we have $(r, r') \in E_1|_{S(\Gamma, C^i)}$. Then, we have $r' \in B(\Gamma, C^i)$. By $C^i \subseteq C^n$ and by C^n is closed under $\mathcal{P}_{\Gamma}$ we have $r' \in B(\Gamma, C^n)$ and thus $r' \in C_{\ominus}^n$. But this is a contradiction to $r' \in C_{\oplus}^i \subseteq C_{\oplus}^n$.

(9b): For $0 \leq i \leq n-1$ we have $C_{\ominus}^i = \emptyset$ and thus, there is nothing to show. Let be $i = n$. C^n is closed under $\mathcal{P}_{\Gamma}$. Assume, there is an $r \in C_{\ominus}^n \cap S(\Gamma, C^n)$ such that $r \in \overline{B}(\Gamma, C^n)$. Then we have $r \in C_{\oplus}^n$ by C^n is closed under $\mathcal{P}_{\Gamma}$. Thus, for $r \in C_{\ominus}^n \cap S(\Gamma, C^n)$ we have $r \in B(\Gamma, C^n)$. Hence, there must exist an $r' \in C_{\oplus}^n$ such that $(r', r) \in E_1$. Furthermore, $r' \in S(\Gamma, C^n)$ holds by $C_{\oplus}^n = \mathcal{P}_{\Gamma}(C^n)_{\oplus} = S(\Gamma, C^n) \cap \overline{B}(\Gamma, C^n)$. Thus, we have $(r', r) \in E_1|_{S(\Gamma, C^n)}$. $\square$

Proof 5.28

Let Γ be the RDG of logic program Π and let C be a total coloring of Γ .

" $\Rightarrow$ ": Let $C = (R_\Pi(X), \Pi \setminus R_\Pi(X))$ be an admissible coloring of Γ for answer set X and $\langle r_i \rangle_{0 \leq i \leq m}$ be an enumeration of $R_\Pi(X)$ such that for all $i \in \{0, \dots, m\}$ we have $\text{body}^+(r_i) \subseteq \text{head}(\{r_j \mid j < i\})$.

Let be $C^0 = \mathcal{P}_\Gamma^*((\emptyset, \emptyset))$ and for $0 \leq i < n - 1$ let be

$$C^{i+1} = \mathcal{P}_\Gamma^*(\mathcal{D}_\Gamma^o(C^i)) = \mathcal{P}_\Gamma^*((C_\oplus^i \cup \{r\}, C_\ominus^i)),$$

where $r = r_j$ for some $0 \leq j \leq m$ such that $\{r_0, \dots, r_{j-1}\} \subseteq C_\oplus^i \cup C_\ominus^i$ and $r_j \notin C_\oplus^i \cup C_\ominus^i$. Furthermore, let be $C^n = \mathcal{N}_\Gamma(C^{n-1})$ where $(\Pi \setminus (C_\oplus^{n-1} \cup C_\ominus^{n-1})) \cap R_\Pi(X) = \emptyset$. Clearly, C^n is a total coloring by definition of $\mathcal{N}_\Gamma$.

Next, we show that $C_\oplus = R_\Pi(X)$. Then, we can conclude that $C^n = C$ holds. Let be $r \in C_\oplus$.

Case 1: r is the "choice rule" selected to obtain C^{i+1} from C^i or

Case 2: r was colored with $\oplus$ by $\mathcal{P}_\Gamma$ at some iterative step from C^i to C^{i+1} for some $0 \leq i < n - 1$.

In Case 1 we have $r \in R_\Pi(X)$ by construction. In Case 2 we have $r \in S(\Gamma, C') \cap \overline{B}(\Gamma, C')$ for some $C^i \sqsubseteq C' \sqsubseteq C^{i+1}$. Then, by Theorem 3.1 we have $r \in R_\Pi(X)$.

Let be $r \in R_\Pi(X)$ and assume that we have $r \in C_\ominus^n$. Then, we have one of the following cases:

Case 1: $r \in C_\ominus^n \setminus C_\ominus^{n-1}$ (r is colored by $\mathcal{N}_\Gamma$) or

Case 2: $r \in C_\ominus^n$ for some $C^i \sqsubset C' \sqsubseteq C^{i+1}$ for some $0 \leq i < n - 1$ (r is colored by $\mathcal{P}_\Gamma$).

Another case don't exists since we only have $\mathcal{D}_\Gamma^\oplus$ as choice. In Case 1 we have then a contradiction to $(\Pi \setminus (C_\oplus^{n-1} \cup C_\ominus^{n-1})) \cap R_\Pi(X) = \emptyset$. In Case 2 we have $r \in \overline{S}(\Gamma, C'') \cup B(\Gamma, C'')$ where $C' = \mathcal{P}_\Gamma(C'')$ holds for a partial coloring C'' such that $C^i \sqsubseteq C'' \sqsubseteq C^{i+1}$ for some $0 \leq i < n - 1$. But then, we get the contradiction $r \notin R_\Pi(X)$ by Theorem 3.1. Thus, we have $R_\Pi(X) = C_\oplus$ and hence we have $C = C^n$.

It remains to show that $C = \mathcal{P}_\Gamma(C)$. But this holds by Corollary 5.7.

" $\Leftarrow$ ": By Corollary 5.7, it remains to show that there exist a support graph of (Γ, C) . That must be $(C_\oplus, E)$ for some $E \subseteq \Pi \times \Pi$ since C is total.

Each vertex in the sequence $(C^i)_{0 \leq i \leq n}$, which is added to some partial coloring C' is supported in (Γ, C') . Thus, we can construct a support graph of (Γ, C) by inductive adding of vertices according to their occurrence in C' . This works similar to proof " $\Leftarrow$ " of Corollary 5.26. $\square$

Proof 5.29

Given the same prerequisites as in Theorem 5.28, let $(C^i)_{0 \leq i \leq n}$ be a sequence satisfying conditions 1-5 in Theorem 5.28. We have to prove $(\mathcal{N}_\Gamma(C^{n-1})_\ominus \setminus C_\ominus^{n-1}) \subseteq \overline{S}(\Gamma, C)$.

Assume, there exists an $r \in \mathcal{N}_\Gamma(C^{n-1})_\ominus \setminus C_\ominus^{n-1}$ such that $r \in S(\Gamma, C)$. By $r \in C_\ominus$ and C is closed under $\mathcal{P}_\Gamma$ we must have $r \in B(\Gamma, C)$. Thus, there must exists an $r' \in C_\oplus$ such that r is blocked by r' . By $\mathcal{N}_\Gamma(C^{n-1})_\oplus = C_\oplus^{n-1}$ we have $r' \in C_\oplus^{n-1}$. Thus, we have

$r \in B(\Gamma, C^{n-1})$. Since C^{n-1} is closed under $\mathcal{P}_\Gamma$ we must have $r \in C_\ominus^{n-1}$. But this is a contradiction to $r \notin C_\ominus^{n-1}$. Hence, we have $(\mathcal{N}_\Gamma(C^{n-1})_\ominus \setminus C_\ominus^{n-1}) \subseteq \overline{S}(\Gamma, C)$. $\square$

Proof 5.30

Given the same prerequisites as in Theorem 5.24, let $(C^i)_{0 \leq i \leq n}$ be a sequence satisfying conditions 1-5 in Theorem 5.24.

Properties 1.-5. follow analogous to Theorem 5.25 by $C \sqsubseteq \mathcal{P}_\Gamma^*(C)$ for a partial coloring C . Property 8 follows analogous to the proof " $\Leftarrow$ " of Theorem 5.28.

For $0 \leq i < n$ the properties 6 and 7 are fulfilled by C^i being closed under $\mathcal{P}_\Gamma$. For $i = n$ the properties 6 and 7 follow by Theorem 3.3, by C^n is total, and $C_\oplus^n = R_\Pi(X)$. $\square$

Proof 5.31

This could be proven analogous to the proofs of Corollary 5.26 and Theorem 5.28. $\square$

Proof 5.32

These properties could be proven analogous to properties given in theorems 5.27 and 5.30. $\square$

Proof 5.33

Let $\Gamma = (\Pi, E_0, E_1)$ be the RDG of logic program Π and C be a partial coloring of Γ .

Furthermore, let $(C_\oplus, E)$ be a support graph of (Γ, C) for some $E \subseteq (\Pi \times \Pi)$.

By Theorem Appendix B.2 we have $\mathcal{T}_\Gamma^*(C) = T(C)$. First, we want to construct a graph $((\mathcal{T}_\Gamma^*(C))_\oplus, E')$ for some $E' \subseteq (\Pi \times \Pi)$. Second, we have to show

SG $((\mathcal{T}_\Gamma^*(C))_\oplus, E')$ is a support graph of (Γ, C) and

M $((\mathcal{T}_\Gamma^*(C))_\oplus, E')$ is a maximal one .

Let $E^0 = E$ and $V^0 = T^0(C)_\oplus = C_\oplus$. Assume that we have constructed $V^i \subseteq \Pi$ and $E^i \subseteq \Pi \times \Pi$ for some $i < \omega$. Now, we want to construct $V^{i+1} \subseteq \Pi$ and $E^{i+1} \subseteq \Pi \times \Pi$. We define

$$\begin{aligned} V^{i+1} &= V^i \cup (S(\Gamma, T^i(C)) \setminus T^i(C)_\ominus) \text{ and} \\ E^{i+1} &= E^i \cup (\{(r', r'') \mid r' \in V^i, r'' \in V^{i+1} \setminus V^i\} \cap E_0). \end{aligned}$$

We define $E' = \bigcup_{i < \omega} E^i$. Clearly, we have $T^{i+1}(C)_\oplus = T^i(C)_\oplus \cup (S(\Gamma, T^i(C)) \setminus T^i(C)_\ominus) = V^{i+1}$ by $V^i = T^i(C)_\oplus$ for all $i < \omega$. Furthermore, we have $\mathcal{T}_\Gamma^*(C)_\oplus = \bigcup_{i < \omega} V^i$ by construction of each V^i and by Theorem Appendix B.2.

It remains to show, that we have constructed a maximal support graph of (Γ, C) .

SG: Clearly, E' is a subset of E_0 and acyclic since E is acyclic and there are only edges from V^i to V^{i+1} . Furthermore, by construction and by $r \in S(\Gamma, T^i(C))$ for all $r \in V^{i+1}$ we have for all $r \in \mathcal{T}_\Gamma^*(C)_\oplus$ that $\text{body}^+(r) \subseteq \{\text{head}(r') \mid (r', r) \in E'\}$ holds.

M: Assume that there exists an $r \in \Pi \setminus \mathcal{T}_\Gamma^*(C)_\oplus$ where $r \notin C_\ominus$ such that $((\mathcal{T}_\Gamma^*(C))_\oplus \cup \{r\}, E'')$ is a support graph of (Γ, C) for some $E'' \subseteq (\Pi \times \Pi)$. By definition of a support graph we have $r \in S(\Gamma, \mathcal{T}_\Gamma^*(C))$ and thus by Theorem Appendix B.2 we have $r \in S(\Gamma, T(C))$. Hence, there exists an $i < \omega$ such that $r \in S(\Gamma, T^i(C))$. Because $r \notin C_\ominus$ we must have $r \in T^{i+1}(C)_\oplus$ and thus $r \in \mathcal{T}_\Gamma^*(C)_\oplus$ holds. That's a contradiction to $r \in \Pi \setminus \mathcal{P}_\Gamma^*(C)_\oplus$ and thus, $((\mathcal{T}_\Gamma^*(C))_\oplus, E')$ is a maximal support graph of (Γ, C) . $\square$

Proof 5.34

This follows directly from Theorem 5.33 and from Definition 5.3 and 5.7. $\square$

Proof 5.35

Let Γ be the RDG of logic program Π and let C be a total coloring of Γ .

" $\Leftarrow$ " By Corollary 5.12 we have to show $C = \mathcal{P}_\Gamma(C)$ and $C = \mathcal{U}_\Gamma(C)$. $C = \mathcal{P}_\Gamma(C)$ holds since $C = C^n$ is closed under $\mathcal{P}_\Gamma$. Analogous to the proof " $\Leftarrow$ " of Theorem 5.28 we can construct $(C_\oplus, E)$ as a support graph of (Γ, C) for some $E \subseteq \Pi \times \Pi$. By Corollary 5.34 and $C = C^n$ is closed under $\mathcal{V}_\Gamma$ we conclude $C = \mathcal{U}_\Gamma(C)$.

" $\Rightarrow$ " Let $C = (R_\Pi(X), \Pi \setminus R_\Pi(X))$ be an admissible coloring of Γ for answer set X of Π . Let $\langle r_i \rangle_{0 \leq i < n}$ be an enumeration of $R_\Pi(X)$ such that for all $0 \leq i \leq n$ we have $\text{body}^+(r_i) \subseteq \text{head}(\{r_j \mid j < i\})$. We define $C^0 = (\mathcal{PV})_\Gamma^*((\emptyset, \emptyset))$ and

$$C^{i+1} = (\mathcal{PV})_\Gamma^*(C_\oplus^i \cup \{r\}, C_\ominus^i)$$

where $r = r_j \in \Pi \setminus (C_\oplus^i \cup C_\ominus^i)$ and $\{r_0, \dots, r_{j-1}\} \subseteq C_\oplus^i \cup C_\ominus^i$ for some $0 \leq j \leq n$. We have to show

1. $C = C^n$ is a total coloring,
2. $C_\oplus = R_\Pi(X)$.

But this follows analogous to the proof of Corollary 5.21, paragraph "**Plus**" " $\Rightarrow$ ". $\square$

Proof 5.36

Properties 1.–7. follow analogous to proof of Theorem 5.17. Property 8 follows from the construction of the support graph $(C_\oplus, E)$ of (Γ, C) for some $E \subseteq \Pi \times \Pi$ (see proof of Theorem 5.35). $\square$

Proof 5.37

Proof is analogous to Corollary 5.21. $\square$

Proof 5.38

Let $\Gamma = (\Pi, E_0, E_1)$ be the RDG of logic program Π . Furthermore, let $n = |\Pi|$ be the size of Π and C be a partial coloring of Γ .

1: Note that checking whether $r \in \Pi$ is supported, unsupported, blocked, or unblocked in (Γ, C) is in $\mathcal{O}(k)$ where $k = \max_{r \in \Pi} |\{(r', r) \in E_0 \cup E_1 : r' \in \Pi\}|$. Hence, it is constant wrt n .

$\mathcal{P}_\Gamma(C)$ is defined as $C \sqcup (S(\Gamma, C) \cap \overline{B}(\Gamma, C), \overline{S}(\Gamma, C) \cup B(\Gamma, C))$. Hence, for every $r \in \Pi$ it has to be computed whether it belongs to $S(\Gamma, C) \cap \overline{B}(\Gamma, C)$ or $\overline{S}(\Gamma, C) \cup B(\Gamma, C)$. Thus, $\mathcal{P}_\Gamma$ is computable in $\mathcal{O}(n)$.

2: We define $k = \max_{r \in \Pi} |\{(r', r) \in E_0 \cup E_1 : r' \in \Pi\}|$ as the maximal number of predecessors of a vertex and $k' = \max_{r \in \Pi} |\{(r, r') \in E_0 \cup E_1 : r' \in \Pi\}|$ as the maximal number of successors of a vertex.

Checking whether $r \in \Pi$ is supported, unsupported, blocked, or unblocked in (Γ, C) is in $\mathcal{O}(k)$. Hence, computing whether $r \in S(\Gamma, C) \cap \overline{B}(\Gamma, C)$ or $r \in \overline{S}(\Gamma, C) \cup B(\Gamma, C)$ is in $\mathcal{O}(k)$.

```

1  function propagation(var C,  $\Gamma$ )
2  queue :=  $\emptyset$ 
3  for all  $r \in \Pi$  do
4      status( $r$ ) := false
5  endfor
6  for all  $r \in \Pi$  do
7      if  $r \in (S(\Gamma, C) \cap \overline{B}(\Gamma, C)) \cup \overline{S}(\Gamma, C) \cup B(\Gamma, C)$ 
8      then push( $r$ , queue)
9          status( $r$ ) := true
10     endif
11 endfor
12 while queue is not empty do
13      $r := \text{pop}(\text{queue})$ 
14     if  $r \in S(\Gamma, C) \cap \overline{B}(\Gamma, C)$  and  $r \notin C_{\oplus}$ 
15     then if  $r \in C_{\ominus}$ 
16         then return false
17     else  $C_{\oplus} := C_{\oplus} \cup \{r\}$ 
18         for all  $r' \in \Pi$  where status( $r'$ ) = false,  $(r, r') \in E_0 \cup E_1$  do
19             if  $r' \in (S(\Gamma, C) \cap \overline{B}(\Gamma, C)) \cup \overline{S}(\Gamma, C) \cup B(\Gamma, C)$ 
20             then push( $r'$ , queue)
21                 status( $r'$ ) := true
22             endif
23         endfor
24     endif
25 endif
26 if  $r \in \overline{S}(\Gamma, C) \cup B(\Gamma, C)$  and  $r \notin C_{\ominus}$ 
27 then if  $r \in C_{\oplus}$ 
28     then return false
29 else  $C_{\ominus} := C_{\ominus} \cup \{r\}$ 
30     for all  $r' \in \Pi$  where status( $r'$ ) = false,  $(r, r') \in E_0 \cup E_1$  do
31         if  $r' \in (S(\Gamma, C) \cap \overline{B}(\Gamma, C)) \cup \overline{S}(\Gamma, C) \cup B(\Gamma, C)$ 
32         then push( $r'$ , queue)
33             status( $r'$ ) := true
34         endif
35     endfor
36 endif
37 endif
38 endwhile

```

Fig. C 1. Algorithm for computation of $\mathcal{P}_{\Gamma}^*(C)$

An algorithm for the computation of $\mathcal{P}_{\Gamma}^*(C)$ is given in Figure C 1. We call a rule $r \in \Pi$ *decided* if the question of the applicability of r is been resolved that is, we have either $r \in$

$S(\Gamma, C) \cap \overline{B}(\Gamma, C)$ or $r \in \overline{S}(\Gamma, C) \cup B(\Gamma, C)$. We call a rule $r \in \Pi$ *undecided* if r is not decided. We use $status(r) = true$ for denoting that r is decided and $status(r) = false$ for denoting that r is undecided. The main idea of the algorithm is to start from the colored vertices and going along the successors of the lastly colored vertices to look for vertices which can be colored in the next step.

In Step (2) the queue, which contains all vertices which can be colored next, is initialized.

Step (3)–(5) initialize the status of each vertex $r \in \Pi$ as false. This works in $\mathcal{O}(n)$.

Step (6–11) are putting all decided (Step (7)) vertices into the queue. Their status is becoming true in Step (9). Steps (6–11) are computable in $\mathcal{O}(n)$.

The **while** loop in Step (12)–(38) takes (iterative) a (decided) vertex r from the queue and considers the cases for coloring this rule.

Step (13) takes a rule from the queue.

Step (14–25) are handling the case for $\oplus$ coloring of decided rules. If $r \in C_{\ominus}$ then Step (16) returns a failure and if r is already colored with $\oplus$ then r is no longer considered. Else, r is colored with $\oplus$ in Step (17). All successors of r , which are now decided (Step (19)) but not yet in the queue (their status is false), are taken into the queue and their status is set to *true* in Step (21). The **for** loop in Step (18) works in $\mathcal{O}(k' * k)$, hence constant wrt n . Thus, Step (14–25) are computable in constant time wrt n .

Analogously, Step (26–37) consider the case for $\ominus$ coloring of decided rules.

By construction of the queue and by adding only rules r with $status(r) = false$, every rule is added at most one time in the queue. Note that after adding rules into the queue their status becomes *true*. Hence, the **while** loop in Step (12–38) is passed through at most n times. As a conclusion, the function `propagation` computes $\mathcal{P}_{\Gamma}^*(C)$ in $\mathcal{O}(n)$.

3: For computing $\mathcal{U}_{\Gamma}(C)$ we must compute a maximal support graph of (Γ, C) . This is done by modifying the linear time algorithm of Dowling and Gallier (Dowling and Gallier 1984) as follows.

Let V be the vertex set of a maximal support graph of (Γ, C) where $\Gamma = (\Pi, E_0, E_1)$. Then, V can be computed with the following algorithm:

```

function MaxSuppGraph( $V, C, \Gamma$ )
 $V := \emptyset$ 
 $queue := \emptyset$ 
for all  $r \in \Pi \setminus C_\ominus$  do  $counter(r) := |body^+(r)|$  endfor
for all  $r \in \Pi \setminus C_\ominus$  do if  $counter(r) = 0$  then  $push(r, queue)$  endif endfor
while  $queue$  is not empty do
   $r := pop(queue)$ 
  for all  $(r, r') \in E_0$  do
    if  $r' \notin C_\ominus$  then
       $counter(r') := counter(r') - 1$ 
      if  $counter(r') = 0$  then  $push(r', queue)$  endif
    endif
  endfor
   $V := V \cup \{r\}$ 
endwhile

```

This algorithm computes V in linear time in size of Π , since every $r \in \Pi$ is entered at most once into the queue and the “for loop” in the “while loop” is executed at most m times, where $m = \max_{r \in \Pi} |\{(r, r') \in E_0 \mid r' \in \Pi\}|$. Hence, $\mathcal{U}_\Gamma$ is computable in $\mathcal{O}(n)$.

4: By Condition 1 and 3, $(\mathcal{PU})_\Gamma$ is computable in $\mathcal{O}(n)$. Hence, $(\mathcal{PU})_\Gamma^*$ is computable in $\mathcal{O}(n^2)$, since we have to iterate $(\mathcal{PU})_\Gamma$ at most n times.

5: For computing $\mathcal{V}_\Gamma(C)$ we have to compute $\mathcal{T}_\Gamma^*(C)_\oplus$. This is done by a modification of the algorithm given in Condition 3. We start with $V = C_\oplus$ instead of $V = \emptyset$ and consider $C_\oplus$ while initializing the counter for every rule $r \in \Pi$.

```

function  $\mathcal{T}_\oplus(V, C, \Gamma)$ 
 $V := C_\oplus$ 
 $queue := \emptyset$ 
for all  $r \in \Pi \setminus C_\ominus$  do  $counter(r) := |body^+(r) \setminus \{head(r') \mid r' \in C_\oplus\}|$  endfor
for all  $r \in \Pi \setminus C_\ominus$  do if  $counter(r) = 0$  then  $push(r, queue)$  endif endfor
while  $queue$  is not empty do
   $r := pop(queue)$ 
  for all  $(r, r') \in E_0$  do
    if  $r' \notin C_\ominus$  then
       $counter(r') := counter(r') - 1$ 
      if  $counter(r') = 0$  then  $push(r', queue)$  endif
    endif
  endfor
   $V := V \cup \{r\}$ 
endwhile

```

Analogously to Condition 3, $\mathcal{V}_\Gamma$ is computable in $\mathcal{O}(n)$.

6: This follows directly from Condition 1 and 5.

7: We have $\mathcal{N}_\Gamma(C) = (C_\oplus, \Pi \setminus C_\oplus)$. Hence, computing $\mathcal{N}_\Gamma$ is in $\mathcal{O}(n)$. $\square$

C.4 Section 6

Proof 6.1

Let Γ be the RDG of logic program Π . We say that $(X, Y) \subseteq (X', Y')$ if $X \subseteq X'$ and $Y \subseteq Y'$ for any $X, Y, X', Y' \subseteq \text{Atm}$.

Let $C = \mathcal{P}_\Gamma^*((\emptyset, \emptyset))$ be a partial coloring of Γ . Furthermore, let $\Phi_\Pi^\omega(\emptyset, \emptyset) = (X^\omega, Y^\omega)$. We have to prove $(X^\omega, Y^\omega) = (X_C, Y_C)$. According to Definition 6.2 and by Theorem Appendix B.1 it can be easily seen that

$$(X_C, Y_C) = \bigcup_{i < \omega} (X_{C^i}, Y_{C^i})$$

where $C^0 = (\emptyset, \emptyset)$ and $C^{i+1} = \mathcal{P}_\Gamma(C^i)$. By definition of Fitting's operator, we obtain

$$(X^\omega, Y^\omega) = \bigcup_{i < \omega} (X^i, Y^i)$$

where $(X^0, Y^0) = (\emptyset, \emptyset)$,

$$\begin{aligned} X^i &= X^{i-1} \cup \{\text{head}(r) \mid r \in \Pi, \text{body}^+(r) \subseteq X^{i-1}, \text{body}^-(r) \subseteq Y^{i-1}\}, \text{ and} \\ Y^i &= Y^{i-1} \cup \{q \mid \text{for all } r \in \Pi, \text{ if } \text{head}(r) = q, \text{ then} \\ &\quad \text{body}^+(r) \cap Y^{i-1} \neq \emptyset \text{ or } \text{body}^-(r) \cap X^{i-1} \neq \emptyset\}. \end{aligned}$$

" $(X^\omega, Y^\omega) \subseteq (X_C, Y_C)$ ": We prove by induction over i that $(X^i, Y^i) \subseteq (X_C, Y_C)$ for all $i < \omega$ hold.

For $i = 0$ we have $(X^0, Y^0) = (\emptyset, \emptyset) \subseteq (X_C, Y_C)$.

Assume, $(X^k, Y^k) \subseteq (X_C, Y_C)$ holds for all $k \leq i$ for some $i < \omega$ (**IH**). We have to prove $(X^{i+1}, Y^{i+1}) \subseteq (X_C, Y_C)$. By induction hypotheses (**IH**), we have

$$\begin{aligned} X^{i+1} &= X^i \cup \{\text{head}(r) \mid r \in \Pi, \text{body}^+(r) \subseteq X^i \subseteq X_C, \text{body}^-(r) \subseteq Y^i \subseteq Y_C\} \text{ and} \\ Y^{i+1} &= Y^i \cup \{q \mid \text{for all } r \in \Pi, \text{ if } \text{head}(r) = q, \text{ then} \\ &\quad \text{body}^+(r) \cap Y^i \neq \emptyset \text{ or } \text{body}^-(r) \cap X^i \neq \emptyset\}. \end{aligned}$$

Let be $\text{head}(r) = a \in X^{i+1} \setminus X^i$, then we have $r \in S(\Gamma, C) \cap \overline{B}(\Gamma, C)$. Thus, $r \in C_\oplus$ holds by C is closed under $\mathcal{P}_\Gamma$ and hence, we have $a \in X_C$.

Let be $a \in Y^{i+1} \setminus Y^i$ and let be $r \in \Pi$ such that $\text{head}(r) = a$. If $\text{body}^+(r) \cap Y^i \neq \emptyset$ then $r \in \overline{S}(\Gamma, C)$. If $\text{body}^-(r) \cap X^i \neq \emptyset$ then $r \in B(\Gamma, C)$. Thus, $a \in Y_C$ holds by C is closed under $\mathcal{P}_\Gamma$.

Hence, we have $(X^{i+1}, Y^{i+1}) \subseteq (X_C, Y_C)$. Thus, we have $(X^\omega, Y^\omega) \subseteq (X_C, Y_C)$.

" $(X^\omega, Y^\omega) \supseteq (X_C, Y_C)$ ": We show by induction over i that $(X_{C^i}, Y_{C^i}) \subseteq (X^\omega, Y^\omega)$ holds for all $i < \omega$. Then, we conclude $(X_C, Y_C) \subseteq (X^\omega, Y^\omega)$.

For $i = 0$ we have $(X_{C^0}, Y_{C^0}) = (\emptyset, \text{Atm} \setminus \text{head}(\Pi)) \subseteq (X^1, Y^1) \subseteq (X^\omega, Y^\omega)$.

Assume, $(X_{C^k}, Y_{C^k}) \subseteq (X^\omega, Y^\omega)$ holds for all $k \leq i$ for some $i < \omega$. We have to show that $(X_{C^{i+1}}, Y_{C^{i+1}}) \subseteq (X^\omega, Y^\omega)$ holds where $C^{i+1} = \mathcal{P}_\Gamma(C^i)$.

Let be $a \in X_{C^{i+1}}$. Then there exists an $r \in \Pi$ such that $\text{head}(r) = a$ and $r \in S(\Gamma, C^i) \cap \overline{B}(\Gamma, C^i)$. Hence, we have $\text{body}^+(r) \subseteq X_{C^i}$ and $\text{body}^-(r) \subseteq Y_{C^i}$. Thus, we have $a \in X^\omega$ by $(X_{C^i}, Y_{C^i}) \subseteq (X^\omega, Y^\omega)$.

Let be $a \in Y_{C^{i+1}}$ then for all $r \in \Pi$ such that $\text{head}(r) = a$ we have $r \in \mathcal{P}_\Gamma(C^i)_\ominus$. Thus, $r \in C_\ominus^i \cup \overline{S}(\Gamma, C^i) \cup B(\Gamma, C^i)$. By $C^k \sqsubseteq C^i$ we have $r \in \overline{S}(\Gamma, C^i) \cup B(\Gamma, C^i)$. If $r \in B(\Gamma, C^i)$ then $\text{body}^-(r) \cap X_{C^i} \neq \emptyset$. If $r \in \overline{S}(\Gamma, C^i)$ then $\text{body}^+(r) \cap Y_{C^i} \neq \emptyset$. Hence, we have $a \in Y^\omega$.

Thus, we have proven $(X^\omega, Y^\omega) \supseteq (X_C, Y_C)$. $\square$

Proof 6.2

Let Γ be the RDG of logic program Π and C be a partial coloring of Γ such that $C_\ominus \subseteq \overline{S}(\Gamma, C) \cup B(\Gamma, C)$. Furthermore, let (V, E) be a maximal support graph of (Γ, C) for some $E \subseteq \Pi \times \Pi$.

First, we show that $\text{Atm} \setminus \text{head}(V)$ is an unfounded set of Π wrt (X_C, Y_C) . Let be $a \in \text{Atm} \setminus \text{head}(V)$. For all $r \in \Pi$ such that $\text{head}(r) = a$, we have to show that one of the following conditions hold:

- U1:** there exists a $p \in \text{body}^+(r)$ such that all rules, with p as head, are in $C_\ominus$ or there exists a $q \in \text{body}^-(r)$ where there exists an $r' \in C_\oplus$ such that $\text{head}(r') = q$ (That is, we have $r \in \overline{S}(\Gamma, C) \cup B(\Gamma, C)$);
- U2:** there exists a $p \in \text{body}^+(r)$ such that $p \in \text{Atm} \setminus \text{head}(V)$.

If $a \in \text{Atm} \setminus \text{head}(V)$ then either $a \notin \text{head}(\Pi)$ or there are (by Definition 4.2) one of the following cases for all rules $r \in \Pi$ where $\text{head}(r) = a$:

Case 1: $\text{body}^+(r) \not\subseteq \text{head}(V)$;

Case 2: $r \in C_\ominus$.

If $a \notin \text{head}(\Pi)$ then **U1** and **U2** are trivially fulfilled since $\{r \mid \text{head}(r) = a\} = \emptyset$.

Case 1: If $\text{body}^+(r) \not\subseteq \text{head}(V)$ then there exists a $p \in \text{body}^+(r)$ such that $p \in \text{Atm} \setminus \text{head}(V)$ and condition **U2** is fulfilled.

Case 2: If $r \in C_\ominus$ then either $r \in \overline{S}(\Gamma, C)$ or $r \in B(\Gamma, C)$. If $r \in \overline{S}(\Gamma, C)$ then there exists an $p \in \text{body}^+(r)$ such that all rules with p as head are in $C_\ominus$. If $r \in B(\Gamma, C)$ then there exists an $r' \in C_\oplus$ such that $\text{head}(r') \in \text{body}^-(r)$. Thus, condition **U1** is fulfilled.

Thus, $\text{Atm} \setminus \text{head}(V)$ is an unfounded set of Π wrt (X_C, Y_C) .

Second, each unfounded set wrt (X_C, Y_C) is in $\text{Atm} \setminus \text{head}(V)$ by maximality of (V, E) and by Definition 4.2. Thus, $\text{Atm} \setminus \text{head}(V)$ is the greatest unfounded set wrt (X_C, Y_C) .

$\square$

Proof 6.3

Let Γ be the RDG of logic program Π and C be a partial coloring of Γ such that $C_\ominus \subseteq \overline{S}(\Gamma, C) \cup B(\Gamma, C)$.

Let $\mathcal{U}_\Gamma(C) = C'$ and let (V, E) be a maximal support graph of (Γ, C) for some $E \subseteq \Pi \times \Pi$. Observe that

$$\begin{aligned} \text{Atm} \setminus \text{head}(\Pi \setminus C'_\ominus) &= \text{Atm} \setminus \text{head}(\Pi \setminus (\Pi \setminus V)) \\ &= \text{Atm} \setminus \text{head}(V). \end{aligned}$$

Thus, by Theorem 6.2, $(Atm \setminus head(\Pi \setminus C'_\ominus))$ is the greatest unfounded set wrt (X_C, Y_C) .

□

Proof 6.4

Let Γ be the *RDG* of logic program Π . Furthermore, let $C = (\mathcal{PU})_\Gamma^*((\emptyset, \emptyset))$ be a partial coloring. We have to show that (X_C, Y_C) is the well-founded model of Π .

First, we show the following Lemma:

[FP]: Let C, C' be partial colorings of Γ such that $C_\oplus \subseteq S(\Gamma, C) \cap \overline{B}(\Gamma, C)$ and $C_\ominus \subseteq \overline{S}(\Gamma, C) \cup B(\Gamma, C)$. Then, if $C' = \mathcal{P}_\Gamma(C)$ then $\Phi_\Pi(X_C, Y_C) = (X_{C'}, Y_{C'})$.

Proof of [FP]: Let be $C' = \mathcal{P}_\Gamma(C)$. Then, $C' = (C_\oplus \cup (S(\Gamma, C) \cap \overline{B}(\Gamma, C)), C_\ominus \cup (\overline{S}(\Gamma, C) \cup B(\Gamma, C)))$. By the preconditions we have $C' = (S(\Gamma, C) \cap \overline{B}(\Gamma, C), \overline{S}(\Gamma, C) \cup B(\Gamma, C))$.

We obtain

$$\begin{aligned} \Phi_\Pi^+(X_C, Y_C) &= \{head(r) \mid r \in \Pi, body^+(r) \subseteq X_C, body^-(r) \subseteq Y_C\} \\ &= \{head(r) \mid r \in S(\Gamma, C) \cap \overline{B}(\Gamma, C)\} \\ &= \{head(r) \mid r \in C'_\oplus\} \\ &= X_{C'}, \text{ and} \end{aligned}$$

$$\begin{aligned} \Phi_\Pi^-(X_C, Y_C) &= \{q \mid \text{if } head(r) = q \text{ then } body^+(r) \cap Y_C \neq \emptyset \text{ or } body^-(r) \cap X_C \neq \emptyset\} \\ &= \{q \mid \text{if } head(r) = q \text{ then } r \in \overline{S}(\Gamma, C) \cup B(\Gamma, C)\} \\ &= \{q \mid \text{if } head(r) = q \text{ then } r \in C'_\ominus\} \\ &= Y_{C'}. \end{aligned}$$

Hence, $\Phi_\Pi(X_C, Y_C) = (X_{C'}, Y_{C'})$.

Second, we show that (X_C, Y_C) is the well-founded model of Π . For this, we give a definition of the well-founded model (Ross 1992). The mapping $\mathcal{U}_\Pi$, which assigns false to every atom in an unfounded set, is defined as follows:

$$\mathcal{U}_\Pi \langle X, Y \rangle = \langle X', Y' \rangle$$

where for all atoms A we have:

- (i) $A \in X'$ if $A \in X$,
- (ii) $A \in Y'$ if A is in the greatest unfounded set (wrt Π and $\langle X, Y \rangle$),
- (iii) A is undefined otherwise.

Then, the well-founded model of Π , $\mathcal{W}_\Pi^\omega \langle \emptyset, \emptyset \rangle$, is defined as follows:

$$\begin{aligned} \mathcal{W}_\Pi^0 \langle \emptyset, \emptyset \rangle &= \langle \emptyset, \emptyset \rangle \\ \mathcal{W}_\Pi^{i+1} \langle \emptyset, \emptyset \rangle &= \Phi_\Pi(\mathcal{U}_\Pi(\mathcal{W}_\Pi^i \langle \emptyset, \emptyset \rangle)) \\ \mathcal{W}_\Pi^\omega \langle \emptyset, \emptyset \rangle &= \cup_{i < \omega} \mathcal{W}_\Pi^i \langle \emptyset, \emptyset \rangle, \end{aligned}$$

where Φ_Π denotes Fitting's operator.

Since all atoms $Atm \setminus head(\Pi)$ are false in the well-founded model, we have $\mathcal{W}_\Pi^\omega \langle \emptyset, \emptyset \rangle = \mathcal{W}_\Pi^\omega \langle \emptyset, Atm \setminus head(\Pi) \rangle$. **[FP]** shows the direct correspondence between greatest unfounded sets and the $\mathcal{U}_\Gamma$ operator. Corollary 6.3 shows the direct correspondence between Fitting's

operator and the propagation operator $\mathcal{P}_\Gamma$. By induction one can show that (X_C, Y_C) is the well-founded model of Π . $\square$

C.5 Appendix

C.5.1 Section Appendix A

Proof Appendix A.1

This follows directly from the definition of $AS_\Pi(C)$ and $AC_\Pi(C)$. $\square$

Proof Appendix A.2

Let X be an answer set and let Π be a logic program. The definition of answer sets states

$$X \text{ is an answer set of } \Pi \text{ iff } Cn(\Pi^X) = X. \quad (C4)$$

We know that for positive logic programs Π^X and $(R_\Pi(X))^\emptyset$ we have:

$$\bigcup_{i \geq 0} T_{\Pi^X}^i(\emptyset) = Cn(\Pi^X) \quad (C5)$$

and

$$\bigcup_{i \geq 0} T_{(R_\Pi(X))^\emptyset}^i(\emptyset) = Cn((R_\Pi(X))^\emptyset). \quad (C6)$$

" $\Rightarrow$ " Now let X be an answer set. Then we have

$$T_{\Pi^X}^i(\emptyset) \subseteq X. \quad (C7)$$

for all $i \geq 0$ because of (C4) and (C5). With (C4) it is sufficient to show $Cn((R_\Pi(X))^\emptyset) = Cn(\Pi^X)$.

We want to prove the equation

$$\bigcup_{i \geq 0} T_{\Pi^X}^i(\emptyset) = \bigcup_{i \geq 0} T_{(R_\Pi(X))^\emptyset}^i(\emptyset)$$

by induction over i . With this equation and using (C5) and (C6) the statement $X = Cn((R_\Pi(X))^\emptyset)$ is proven. For $i = 0$ we have:

$$T_{\Pi^X}^0(\emptyset) = \emptyset = T_{(R_\Pi(X))^\emptyset}^0(\emptyset).$$

Now let $i = 1$. Then we have:

$$\begin{aligned} T_{\Pi^X}^1(\emptyset) &= T_{\Pi^X}(\emptyset) \\ &= \{head(r) : r \in \Pi^X, body(r) \subseteq \emptyset\} && \text{(by (3))} \\ &= \{head(r) : r \in \Pi, \\ &\quad body^-(r) \cap X = \emptyset, body^+(r) \subseteq \emptyset\} && \text{(by (2))} \\ &= \{head(r) : r \in (R_\Pi(X))^\emptyset, body(r) = \emptyset\} && \text{(by } (body^+(r) = \emptyset)) \\ &= T_{(R_\Pi(X))^\emptyset}^1(\emptyset) && \text{(by (3))} \end{aligned}$$

Assume that we have the induction hypothesis (IH)

$$T_{\Pi^X}^i(\emptyset) = T_{(R_\Pi(X))^\emptyset}^i(\emptyset).$$

For $i + 1$ we have:

$$\begin{aligned}
 T_{\Pi^X}^{i+1}(\emptyset) &= T_{\Pi^X}(T_{\Pi^X}^i(\emptyset)) \\
 &= \{head(r) : r \in \Pi^X, body(r) \subseteq T_{\Pi^X}^i(\emptyset)\} \quad (\text{by (3)}) \\
 &= \{head(r) : r \in \Pi, \\
 &\quad body^-(r) \cap X = \emptyset, body^+(r) \subseteq T_{\Pi^X}^i(\emptyset)\} \quad (\text{by (2)})
 \end{aligned}$$

and

$$\begin{aligned}
 T_{(R_{\Pi}(X))^{\emptyset}}^{i+1}(\emptyset) &= T_{(R_{\Pi}(X))^{\emptyset}}(T_{(R_{\Pi}(X))^{\emptyset}}^i(\emptyset)) \\
 &= \{head(r) : r \in (R_{\Pi}(X))^{\emptyset}, body(r) \subseteq T_{(R_{\Pi}(X))^{\emptyset}}^i(\emptyset)\} \quad (\text{by (3)}) \\
 &= \{head(r) : r \in \Pi, body^-(r) \cap X = \emptyset, \\
 &\quad body^+(r) \subseteq X, body^+(r) \subseteq T_{(R_{\Pi}(X))^{\emptyset}}^i(\emptyset)\} \\
 &= \{head(r) : r \in \Pi, body^-(r) \cap X = \emptyset, \\
 &\quad body^+(r) \subseteq X, body^+(r) \subseteq T_{\Pi^X}^i(\emptyset)\} \quad (\text{by (IH)}) \\
 &= \{head(r) : r \in \Pi, body^-(r) \cap X = \emptyset, \\
 &\quad body^+(r) \subseteq T_{\Pi^X}^i(\emptyset)\} \quad (\text{by (C7)})
 \end{aligned}$$

Thus we have proven $X = Cn((R_{\Pi}(X))^{\emptyset})$.

" $\Leftarrow$ " Now let be $X = Cn((R_{\Pi}(X))^{\emptyset})$. We have to show that X is an answer set. Because of (C6) we have

$$T_{(R_{\Pi}(X))^{\emptyset}}^i(\emptyset) \subseteq X \quad (\text{C8})$$

for all $i \geq 0$. Using this equation we can show analogously that $T_{\Pi^X}^i(\emptyset) = T_{(R_{\Pi}(X))^{\emptyset}}^i(\emptyset)$ holds for all $i \geq 0$. Therefore, we have $Cn(\Pi^X) = Cn((R_{\Pi}(X))^{\emptyset})$ because of (C6) and (C5). Finally, (C4) gives us that X is an answer set. $\square$

Proof Appendix A.3

Let X be an answer set of logic program Π .

We have to show, that there exists an enumeration $\langle r_i \rangle_{i \in I}$ of $R_{\Pi}(X)$, such that for all $i \in I$ we have $body^+(r_i) \subseteq head(\{r_j \mid j < i\})$.

Since X is an answer set, we know from Theorem Appendix A.2: $X = Cn((R_{\Pi}(X))^{\emptyset})$. Furthermore we have $Cn((R_{\Pi}(X))^{\emptyset}) = \bigcup_{i \geq 0} T_{(R_{\Pi}(X))^{\emptyset}}^i(\emptyset)$. Thus, we have that $X = \bigcup_{i \geq 0} T_{(R_{\Pi}(X))^{\emptyset}}^i(\emptyset)$. For this reason, we find an enumeration $\langle x_j \rangle_{j \in J}$ of X such that $x_i \in T_{(R_{\Pi}(X))^{\emptyset}}^k(\emptyset)$ and $x_j \in T_{(R_{\Pi}(X))^{\emptyset}}^l(\emptyset)$ hold for $i < j$ and some minimal k and l such that $k < l$. This enumeration $\langle x_j \rangle_{j \in J}$ of X gives us an enumeration $\langle r_i \rangle_{i \in I}$ of $R_{\Pi}(X)$ such that for all $i \in I$ we have $body^+(r_i) \subseteq head(\{r_j \mid j < i\})$. $\square$

Proof Appendix A.4

Let Γ be the RDG of logic program Π , C be a partial coloring of Γ and let $X \in AS_{\Pi}(C)$ be an answer set of Π . By definition of X we have $C_{\oplus} \subseteq R_{\Pi}(X)$, $C_{\ominus} \cap R_{\Pi}(X) = \emptyset$ and $X = Cn((R_{\Pi}(X))^{\emptyset}) = \bigcup_{i < \omega} T_{(R_{\Pi}(X))^{\emptyset}}^i(\emptyset)$.

By induction we show that for all $r \in R_{\Pi}(X)$ we have $head(r) \in \bigcup_{i < \omega} T_{(R_{\Pi}(X))^{\emptyset}}^i(\emptyset)$. Then by $head(C_{\oplus}) \subseteq head(R_{\Pi}(X))$ we have $head(C_{\oplus}) \subseteq X = \bigcup_{i < \omega} T_{(R_{\Pi}(X))^{\emptyset}}^i(\emptyset)$.

By Theorem Appendix A.3 we have an enumeration $\langle r_i \rangle_{i \in I}$ of $R_{\Pi}(X)$ such that for all

$i \in I$ we have $body^+(r_i) \subseteq head(\{r_j \mid j < i\})$. Let be $I = \{0, \dots, m\}$ for some $m < \omega$. Clearly, we have $body^+(r_0) = \emptyset \subseteq \bigcup_{i < \omega} T_{(R_\Pi(X))^\emptyset}^i(\emptyset)$.

Let be $r_k \in R_\Pi(X)$ for $k < m$ and $head(\{r_0, \dots, r_{k-1}\}) \subseteq \bigcup_{0 \leq i \leq l} T_{(R_\Pi(X))^\emptyset}^i(\emptyset)$ for some $l < \omega$. We have to show, that $head(r_k) \subseteq \bigcup_{0 \leq i \leq l+1} T_{(R_\Pi(X))^\emptyset}^i(\emptyset)$ holds. Because we have an enumeration of $R_\Pi(X)$ satisfying Theorem Appendix A.3 we have $body^+(r_k) \subseteq head(\{r_0, \dots, r_{k-1}\})$. By Equation 3 we have $head(r_k) \subseteq \bigcup_{0 \leq i \leq l+1} T_{(R_\Pi(X))^\emptyset}^i(\emptyset)$. Thus, we have $head(C_\oplus) \subseteq head(R_\Pi(X)) \subseteq \bigcup_{i < \omega} T_{(R_\Pi(X))^\emptyset}^i(\emptyset) = X$.

Assume C is admissible, then $C_\oplus = R_\Pi(X)$. It remains to show that $X \subseteq head(C_\oplus)$. Let $p \in X$ be some atom. By $X = Cn((R_\Pi(X))^\emptyset)$ there must exists an $r \in R_\Pi(X)$ such that $p = head(r)$. By $C_\oplus = R_\Pi(X)$ we have $r \in C_\oplus$ and thus we have $p \in head(C_\oplus)$. $\square$

Proof Appendix A.5

Let Γ be the RDG of logic program Π and C be a partial coloring of Γ . Furthermore let $X \in AS_\Pi(C)$.

Let C' be a total coloring such that $C \sqsubseteq C'$, $C'_\oplus = R_\Pi(X)$, and $C'_\ominus \cap R_\Pi(X) = \emptyset$ hold. Clearly, such C' must exists because we have an answer set X such that $\{X\} = AS_\Pi(C')$. By Theorem Appendix A.4 we have $head(C'_\oplus) = X$.

Let be $p \in Atm$ such that $\{r \in \Pi \mid head(r) = p\} \subseteq C_\ominus \subseteq C'_\ominus$. Then, $\{r \in \Pi \mid head(r) = p\} \cap C'_\oplus = \emptyset$ and thus we have $head(r) = p \notin X$ for all such $r \in \Pi$. $\square$

Proof Appendix A.6

Let $\Gamma = (\Pi, E_0, E_1)$ be the RDG of logic program Π , X be an answer set of Π and C be a partial coloring of Γ such that $C_\oplus = R_\Pi(X)$ and $C_\ominus = \emptyset$. Furthermore, let C^X be a total coloring of Γ such that $\{X\} = AS_\Pi(C^X)$.

We have to show that $\mathcal{P}_\Gamma(C) = (C_\oplus, C'_\ominus)$ holds where $B(\Gamma, C^X) \subseteq C'_\ominus$.

We have $\mathcal{P}_\Gamma(C) = (C_\oplus \cup (S(\Gamma, C) \cap \overline{B}(\Gamma, C)), C_\ominus \cup \overline{S}(\Gamma, C) \cup B(\Gamma, C))$. Thus we have to show:

1. $C_\oplus = C_\oplus \cup (S(\Gamma, C) \cap \overline{B}(\Gamma, C))$ and
2. $B(\Gamma, C^X) \subseteq C_\ominus \cup \overline{S}(\Gamma, C) \cup B(\Gamma, C)$.

1: By Theorem 3.3 we have $S(\Gamma, C) \cap \overline{B}(\Gamma, C) \subseteq R_\Pi(X) = C_\oplus$.

2: It remains to show that $B(\Gamma, C^X) \subseteq B(\Gamma, C)$. Let be $r \in B(\Gamma, C^X)$. Then there exists an $r' \in C_\oplus^X$ such that $(r', r) \in E_1$. By $C_\oplus^X = R_\Pi(X) = C_\oplus$ we have $r \in B(\Gamma, C)$. $\square$

Proof Appendix A.7

Let Γ be the RDG of logic program Π and C, C' be a partial colorings of Γ such that $C \sqsubseteq C'$.

Let be $a \in X_C$, then there exists an $r \in C_\oplus$ such that $head(r) = a$. By $C_\oplus \subseteq C'_\oplus$ we have $a \in X_{C'}$.

Let be $a \in Y_C$, then for all $r \in \Pi$ such that $head(r) = a$ we have $r \in C_\ominus$. By $C_\ominus \subseteq C'_\ominus$ we have $a \in Y_{C'}$. $\square$

C.6 Section Appendix B

Proof Appendix B.1

Let Γ be the RDG of logic program Π and C be a partial coloring of Γ .

1: The existence of $P(C) = \bigsqcup_{i < \omega} P^i(C)$ follows from Theorem 5.1 and from property 3 in this theorem by induction over i .

2: By definition of $P(C)$ and Definition 5.1, $P(C)$ is a partial coloring, because $P(C)$ only operates on partial colorings.

3: By Theorem Appendix A.1 it remains to show that $AS_{\Pi}(C) = AS_{\Pi}(P(C))$. By $C \sqsubseteq P^i(C)$ we have, if $X \in AS_{\Pi}(P^i(C))$ then $X \in AS_{\Pi}(C)$ for all $i < \omega$. Furthermore, if $X \in AS_{\Pi}(P(C))$ then $X \in AS_{\Pi}(P^i(C))$ by $P^i(C) \sqsubseteq P(C)$ for all $i < \omega$.

Let $X \in AS_{\Pi}(C)$. We prove by induction over i that $X \in AS_{\Pi}(P^i(C))$ for all $i < \omega$ and thus $X \in AS_{\Pi}(P(C))$.

For $i = 0$ we have $P^0(C) = C$ and thus by definition of C , $X \in AS_{\Pi}(P^0(C))$.

Assume, $X \in AS_{\Pi}(P^k(C))$ for all $0 \leq k \leq i$ for some $i < \omega$. We have to show that $X \in AS_{\Pi}(P^{i+1}(C))$.

Abbreviatory we write C' instead of $P^i(C)$.

We have $C'_{\oplus} \subseteq R_{\Pi}(X)$ and $C'_{\ominus} \cap R_{\Pi}(X) = \emptyset$. By

$$\begin{aligned} P^{i+1}(C) &= \mathcal{P}_{\Gamma}(C') \\ &= (C'_{\oplus} \cup (S(\Gamma, C') \cap \overline{B}(\Gamma, C')), C'_{\ominus} \cup \overline{S}(\Gamma, C') \cup B(\Gamma, C')), \end{aligned}$$

it remains to show, that $S(\Gamma, C') \cap \overline{B}(\Gamma, C') \subseteq R_{\Pi}(X)$ and $(\overline{S}(\Gamma, C') \cup B(\Gamma, C')) \cap R_{\Pi}(X) = \emptyset$. But this holds by Theorem 3.3. Thus, $X \in AS_{\Pi}(P^{i+1}(C))$.

4: $C = P^0(C) \sqsubseteq P(C)$ holds by definition of $P^0(C)$ and $P^{i+1}(C)$ for all $i < \omega$.

5: We have to show, that $\mathcal{P}_{\Gamma}(P(C)) = P(C)$.

By finiteness there exists an $n < \omega$ such that $P(C) = P^n(C)$ and $P^n(C) = P^{n+1}(C)$. Thus, we have to show $\mathcal{P}_{\Gamma}(P^n(C)) = P(C)$.

By definition of $P(C)$ we have $\mathcal{P}_{\Gamma}(P^n(C)) = P^{n+1}(C) \sqsubseteq P(C)$. It remains to show, that $P(C) = P^n(C) \sqsubseteq \mathcal{P}_{\Gamma}(P^n(C))$. But this holds by definition of $\mathcal{P}_{\Gamma}$. Thus, $\mathcal{P}_{\Gamma}(P(C)) = P(C)$.

6: We have to show that $P(C)$ is the $\sqsubseteq$ -smallest partial coloring closed under $\mathcal{P}_{\Gamma}$. Assume there exists a $Q(C) \neq P(C)$ such that $Q(C) \sqsubseteq P(C)$ and $Q(C)$ is a partial coloring closed under $\mathcal{P}_{\Gamma}$.

Given $Q^0(C) = C = P^0(C)$, there must exists a (minimal) $i < \omega$ such that $Q^{i+1}(C) \neq P^{i+1}(C)$ and $Q^j(C) = P^j(C)$ for all $j \leq i$. But then

$$Q^{i+1}(C) = \mathcal{P}_{\Gamma}(Q^i(C)) \neq \mathcal{P}_{\Gamma}(P^i(C)) = P^{i+1}(C).$$

By $Q^i(C) = P^i(C)$, we have

$$\mathcal{P}_{\Gamma}(Q^i(C)) = \mathcal{P}_{\Gamma}(P^i(C))$$

and thus $Q^{i+1}(C) = P^{i+1}(C)$ by definition of $\mathcal{P}_\Gamma$. This is a contradiction. For this reason, $P(C)$ is the $\sqsubseteq$ -smallest partial coloring closed under $\mathcal{P}_\Gamma$.

7: This follows directly from conditions 4–6 and by definition of $\mathcal{P}_\Gamma^*(C)$. $\square$

Proof Appendix B.2

Let Γ be the RDG of logic program Π and C be a partial coloring of Γ .

1: We prove by induction over i that $T^i(C)$ is a partial coloring for all $i < \omega$. Then, $T(C)$ is a partial coloring.

For $i = 0$ we have $T^0(C) = C$ is a partial coloring. Assume that $T^k(C)$ is a partial coloring for all $0 \leq k \leq i$ for some $i < \omega$. We have to show that $T^{i+1}(C)$ is a partial coloring. We have

$$\begin{aligned} T^{i+1}(C) &= \mathcal{T}_\Gamma(T^i(C)) \\ &= (T^i(C)_\oplus \cup (S(\Gamma, T^i(C)) \setminus T^i(C)_\ominus), T^i(C)_\ominus). \end{aligned}$$

But this is clearly a partial coloring because $T^i(C)$ is a partial coloring.

2-5: Hold analogous to Theorem Appendix B.1. $\square$

Proof Appendix B.3

Let Γ be the RDG of logic program Π and C be a partial coloring of Γ .

1: The existence of $PU(C) = \bigcup_{i < \omega} PU^i(C)$ follows inductively by theorems 5.1 and 4.2 (existence of maximal support graphs) and by property 3 in this theorem.

2: This could be proven analogous to Theorem Appendix B.1 by the existence of $\mathcal{U}_\Gamma$ in each inductive step for defining $PU(C)$.

3: By Theorem Appendix A.1 it remains to show that $AS_\Pi(C) = AS_\Pi(PU(C))$. By $PU(C) \supseteq PU^i(C) \supseteq C$ for all $i < \omega$ we have if $X \in AS_\Pi(PU(C))$ then $X \in AS_\Pi(PU^i(C))$ and then $X \in AS_\Pi(C)$ for all $i < \omega$.

Let $X \in AS_\Pi(C)$. We prove by induction over i that $X \in AS_\Pi(PU^i(C))$ for all $i < \omega$. Then, $X \in AS_\Pi(PU(C))$.

For $i = 0$ we have $PU^0(C) = C$ and thus $X \in AS_\Pi(PU^0(C))$. Assume, $X \in AS_\Pi(PU^k(C))$ for all $0 \leq k \leq i$ for some $i < \omega$. Then, $R_\Pi(X) \supseteq PU^i(C)_\oplus$ and $R_\Pi(X) \cap PU^i(C)_\ominus = \emptyset$. Now, we prove that $X \in AS_\Pi(PU^{i+1}(C))$.

We have to show that

- (a) $R_\Pi(X) \subseteq PU^{i+1}(C)_\oplus$ and
- (b) $R_\Pi(X) \cap PU^{i+1}(C)_\ominus = \emptyset$.

(a): We have $PU^{i+1}(C)_\oplus = \mathcal{U}_\Gamma(\mathcal{P}_\Gamma(PU^i(C)))_\oplus$. By Theorem Appendix B.1 we have $R_\Pi(X) \subseteq \mathcal{P}_\Gamma(PU^i(C))_\oplus = \mathcal{U}_\Gamma(\mathcal{P}_\Gamma(PU^i(C)))_\oplus$.

(b): We have

$$PU^{i+1}(C)_\ominus = \mathcal{U}_\Gamma(\mathcal{P}_\Gamma(PU^i(C)))_\ominus.$$

Analogous to Theorem Appendix B.1 we have $\mathcal{P}_\Gamma(PU^i(C))_\ominus \cap R_\Pi(X) = \emptyset$. Let (V, E) be a maximal support graph of $(\Gamma, \mathcal{P}_\Gamma(PU^i(C)))$ for some $E \subseteq (\Pi \times \Pi)$. To prove $\mathcal{U}_\Gamma(\mathcal{P}_\Gamma(PU^i(C)))_\ominus \cap R_\Pi(X) = \emptyset$, it is enough to show that $(\Pi \setminus V) \cap R_\Pi(X) = \emptyset$.

But this holds by

$$\Pi \setminus V \subseteq \{r \mid \text{body}^+(r) \not\subseteq X\} \subseteq \{r \notin R_\Pi(X)\}.$$

4: $C = PU^0(C) \sqsubseteq PU(C)$ holds by definition of $PU(C)$.

5: We have to show

1. $\mathcal{P}_\Gamma(PU(C)) = PU(C)$ and
2. $\mathcal{U}_\Gamma(PU(C)) = PU(C)$.

By finiteness, there exists an $n < \omega$ s.t. $PU(C) = PU^n(C)$ and $PU^n(C) = PU^{n+1}(C)$.

1: $PU(C) \sqsubseteq \mathcal{P}_\Gamma(PU(C))$ holds by definition of $\mathcal{P}_\Gamma$. And, we have $PU^{n+1}(C) = \mathcal{U}_\Gamma(\mathcal{P}_\Gamma(PU^n(C))) = PU^n(C)$. Thus, we have $\mathcal{P}_\Gamma(PU(C)) = PU(C)$.

2: By use of Theorem 5.9 we have

$$\begin{aligned} PU(C) &= PU^n(C) \\ &= \mathcal{U}_\Gamma(\mathcal{P}_\Gamma(PU^{n-1}(C))) \\ &= \mathcal{U}_\Gamma(\mathcal{U}_\Gamma(\mathcal{P}_\Gamma(PU^{n-1}(C)))) \\ &= \mathcal{U}_\Gamma(PU^n(C)) \\ &= \mathcal{U}_\Gamma(PU(C)). \end{aligned}$$

6: Assume there exists a $Q(C) \neq PU(C)$ such that $Q(C) \sqsubseteq PU(C)$ and $Q(C)$ is a partial coloring closed under $\mathcal{P}_\Gamma$ and $\mathcal{U}_\Gamma$.

Given $Q^0(C) = C = PU^0(C)$, there must exist a (minimal) $i < \omega$ s.t. $Q^{i+1}(C) \neq PU^{i+1}(C)$ and $Q^j(C) = PU^j(C)$ for all $j \leq i$. But then

$$\begin{aligned} Q^{i+1}(C) &= \mathcal{U}_\Gamma Q^i(C) \sqcup \mathcal{P}_\Gamma Q^i(C) \sqcup Q^i(C) \\ &\neq \mathcal{U}_\Gamma PU^i(C) \sqcup \mathcal{P}_\Gamma PU^i(C) \sqcup PU^i(C) = PU^{i+1}(C). \end{aligned}$$

But this is a contradiction since $PU^i(C) = Q^i(C)$. For this reason, $PU(C)$ is the $\sqsubseteq$ -smallest partial coloring closed under $\mathcal{P}_\Gamma$ and $\mathcal{U}_\Gamma$.

7: This follows directly from condition 5 and by definition of $(\mathcal{PU})_\Gamma^*$. $\square$

Proof Appendix B.4

Holds analogous to Theorem Appendix B.3. $\square$

References

- ANGER, C., KONCZAK, K., AND LINKE, T. 2002. noMoRe: Non-monotonic reasoning with logic programs. In *Proceedings of the Eighth European Conference on Logics in Artificial Intelligence (JELIA'02), Lecture Notes in Artificial Intelligence*, S. Flesca, S. Greco, N. Leone, and G. Ianni, Eds. Lecture Notes in Computer Science, vol. 2424. Springer-Verlag, 521–524.

- APT, K., BLAIR, H., AND WALKER, A. 1987. Towards a theory of declarative knowledge. In *Foundations of Deductive Databases and Logic Programming*, J. Minker, Ed. Morgan Kaufmann Publishers, Chapter 2, 89–148.
- BARAL, C. AND GELFOND, M. 1994. Logic programming and knowledge representation. *Journal of Logic Programming* 12, 1–80.
- BONATTI, P. 1996. Proof systems for default and autoepistemic logic. In *Proceedings Tableaux'96*, P. Miglioli, U. Moscato, D. Mundici, and M. Ornaghi, Eds. Lecture Notes in Artificial Intelligence, vol. 1071. Springer-Verlag, 127–142.
- BONATTI, P. 2001. Resolution for skeptical stable model semantics. *Journal of Automated Reasoning* 27, 4, 391–421.
- BONATTI, P. AND OLIVETTI, N. 1997. A sequent calculus for skeptical default logic. In *Proceedings Tableaux'97*, D. Galmiche, Ed. Lecture Notes in Artificial Intelligence, vol. 1227. Springer-Verlag, 107–121.
- BÖSEL, A., LINKE, T., AND SCHAUB, T. 2004. Profiling answer set programming: The visualization component of the noMORE system. In *Proceedings of the Ninth European Conference on Logics in Artificial Intelligence (JELIA'04)*, J. Alferes and J. Leite, Eds. Lecture Notes in Artificial Intelligence, vol. 3229. Springer-Verlag, 702–705.
- BRASS, S., DIX, J., FREITAG, B., AND ZUKOWSKI, U. 2001. Transformation-based bottom-up computation of the well-founded model. *Theory and Practice of Logic Programming* 1, 5 (September), 497–538.
- BRIGNOLI, G., COSTANTINI, S., D'ANTONA, O., AND PROVETTI, A. 1999. Characterizing and computing stable models of logic programs: the non-stratified case. In *Proceedings of the Conference on Information Technology, Bhubaneswar, India*, C. Baral and H. Mohanty, Eds. AAAI Press, 197–201.
- CALIMERI, F., FABER, W., LEONE, N., AND PFEIFER, G. 2001. Pruning operators for answer set programming systems. Technical Report INFSYS RR-1843-01-07, Technische Universität Wien. May.
- CLARK, K. 1978. Negation as failure. In *Logic and Data Bases*, H. Gallaire and J. Minker, Eds. Plenum Press, 293–322.
- cmodels. <http://www.cs.utexas.edu/users/tag/cmodels.html>.
- COSTANTINI, S. 2001. Comparing different graph representations of logic programs under the answer set semantics. In *Proc. of the AAAI Spring 2001 Symposium on: Answer Set Programming, Towards Efficient and Scalable Knowledge Representation and Reasoning*, T. C. Son and A. Proveti, Eds. AAAI Press, Stanford, CA, USA.
- COSTANTINI, S., D'ANTONA, O., AND PROVETTI, A. 2002. On the equivalence and range of applicability of graph-based representations of logic programs. *Information Processing Letters* 84, 5, 241–249.
- COSTANTINI, S. AND PROVETTI, A. 2005. Normal forms for answer sets programming. *To appear in Theory and Practice of Logic Programming*.
- DENECKER, M., MAREK, V., AND TRUSZCZYŃSKI, M. 2000. Approximations, stable operators, well-founded fixpoints and applications in nonmonotonic reasoning. In *Logic-Based Artificial Intelligence*, J. Minker, Ed. Kluwer Academic Publishers, Dordrecht, 127–144.
- DIMOPOULOS, Y. AND TORRES, A. 1996. Graph theoretical structures in logic programs and default theories. *Theoretical Computer Science* 170, 209–244.
- dlv. <http://www.dlvsystem.com>.
- DOWLING, W. AND GALLIER, J. 1984. Linear-time algorithms for testing the satisfiability of propositional horn formulae. *Journal of Logic Programming* 1, 267–284.
- EITER, T., FABER, W., LEONE, N., AND PFEIFER, G. 1999. The diagnosis frontend of the dlv system. *AI Communications* 12, 1-2, 99–111.
- FABER, W. 2002. Dissertation, Technische Universität Wien.

- FAGES, F. 1994. Consistency of clark's completion and the existence of stable models. *Journal of Methods of Logic in Computer Science* 1, 51–60.
- FITTING, M. 2002. Fixpoint semantics for logic programming a survey. *Theoretical Computer Science* 278, 1-2, 25–51.
- GELFOND, M. AND LIFSCHITZ, V. 1988. The stable model semantics for logic programming. In *Proceedings of the International Conference on Logic Programming*. The MIT Press, 1070–1080.
- GELFOND, M. AND LIFSCHITZ, V. 1991. Classical negation in logic programs and disjunctive databases. *New Generation Computing* 9, 365–385.
- JANHUNEN, T. 2000. Comparing the expressive powers of some syntactically restricted classes of logic programs. In *Proceedings of the First International Conference on Computational Logic (CL 2000)*, J. Lloyd, V. Dahl, U. Furbach, M. Kerber, K. Lau, C. Palamidessi, L. Pereira, Y. Sagiv, and P. Stuckey, Eds. Lecture Notes in Computer Science, vol. 1861. Springer-Verlag, 852–866.
- KONCZAK, K., LINKE, T., AND SCHAUB, T. 2003. Graphs and colorings for answer set programming: Abridged report. In *Proceedings of the Second International Workshop on Answer Set Programming (ASP'03)*, M. D. Vos and A. Proveti, Eds. Vol. 78. CEUR Workshop Proceedings, 137–150.
- KONCZAK, K., LINKE, T., AND SCHAUB, T. 2004. Graphs and colorings for answer set programming: Abridged report. In *Proceedings of the Seventh International Conference on Logic Programming and Nonmonotonic Reasoning (LPNMR'04)*, V. Lifschitz and I. Niemelä, Eds. Lecture Notes in Artificial Intelligence, vol. 2923. Springer-Verlag, 127–140.
- KONCZAK, K., SCHAUB, T., AND LINKE, T. 2003a. Graphs and colorings for answer set programming with preferences. *Fundamenta Informaticae* 57, 2-4, 393–421.
- KONCZAK, K., SCHAUB, T., AND LINKE, T. 2003b. Graphs and colorings for answer set programming with preferences: Preliminary report. In *Proceedings of the Second International Workshop on Answer Set Programming (ASP'03)*, M. D. Vos and A. Proveti, Eds. Vol. 78. CEUR Workshop Proceedings, 43–56.
- LEONE, N., FABER, W., PFEIFER, G., EITER, T., GOTTLOB, G., KOCH, C., MATEIS, C., PERRI, S., AND SCARCELLO, F. 2005. The DLV system for knowledge representation and reasoning. *ACM Transactions on Computational Logic*. To appear.
- LIFSCHITZ, V. 1996. Foundations of logic programming. In *Principles of Knowledge Representation*, G. Brewka, Ed. CSLI Publications, 69–127.
- LIN, F. AND ZHAO, J. 2003. On tight logic programs and yet another translation from normal logic programs to propositional logic. In *IJCAI-03, Proceedings of the Eighteenth International Joint Conference on Artificial Intelligence*, G. Gottlob and T. Walsh, Eds. Morgan Kaufmann, 853–858.
- LIN, F. AND ZHAO, Y. 2004. Assat: computing answer sets of a logic program by sat solvers. *Artificial Intelligence* 157, 1-2, 115–137.
- LINKE, T. 2001. Graph theoretical characterization and computation of answer sets. In *Proceedings of the International Joint Conference on Artificial Intelligence*, B. Nebel, Ed. Morgan Kaufmann Publishers, 641–645.
- LINKE, T. 2003. Using nested logic programs for answer set programming. In *Proceedings of the Second International Workshop on Answer Set Programming (ASP'03)*, M. de Vos and A. Proveti, Eds. Vol. 78. CEUR Workshop Proceedings, 181–194.
- LINKE, T., ANGER, C., AND KONCZAK, K. 2002. More on noMoRe. In *Proceedings of the Eighth European Conference on Logics in Artificial Intelligence (JELIA'02)*, S. Flesca, S. Greco, N. Leone, and G.Ianni, Eds. Lecture Notes in Artificial Intelligence, vol. 2424. Springer-Verlag, 468–480.
- LINKE, T. AND SCHAUB, T. 1998. An approach to query-answering in Reiter's default logic and the underlying existence of extensions problem. In *Logics in Artificial Intelligence, Proceedings of the Sixth European Workshop on Logics in Artificial Intelligence*, J. Dix, L. F. del Cerro, and U. Furbach, Eds. Lecture Notes in Artificial Intelligence, vol. 1489. Springer-Verlag, 233–247.

- LINKE, T. AND SCHAUB, T. 2000. Alternative foundations for Reiter's default logic. *Artificial Intelligence* 124, 1, 31–86.
- LLOYD, J. 1987. *Foundations of Logic Programming*, 2nd ed. Symbolic Computation. Springer-Verlag.
- LONC, Z. AND TRUSZCZYŃSKI, M. 2001. On the problem of computing the well-founded semantics. *Theory and Practice of Logic Programming* 1, 5, 591–609.
- NIEMELÄ, I. AND SIMONS, P. 1996. Efficient implementation of the well-founded and stable model semantics. In *Proceedings of the Joint International Conference and Symposium on Logic Programming*, M. Maher, Ed. The MIT Press, 289–303.
- nomore. nomore. <http://www.cs.uni-potsdam.de/~linke/nomore>.
- PAPADIMITRIOU, C. AND SIDERI, M. 1994. Default theories that always have extensions. *Artificial Intelligence* 69, 347–357.
- PRZYMUSINSKI, T. 1988. On the declarative semantics of deductive databases and logic programs. In *Foundations of Deductive Databases and Logic Programming*, J. Minker, Ed. Morgan Kaufmann Publishers, 193–216.
- PRZYMUSINSKI, T. 1990. The well-founded semantics coincides with the three-valued stable semantics. *Fundamenta Informaticae* 13, 4, 445–463.
- REITER, R. 1980. A logic for default reasoning. *Artificial Intelligence* 13, 1-2, 81–132.
- ROSS, K. May 1992. A prodedural semantics for well-founded negation in logic programs. *Journal of Logic Programming* 13, 1, 1–22.
- SACCÁ, D. AND ZANIOLO, C. 1990. Stable models and non-determinism in logic programs with negation. In *Proceedings of the Ninth ACM SIGACT-SIGMOD-SIGART Symposium on Principles of Database Systems*. ACM Press, 205–217.
- SAGONAS, K., SWIFT, T., AND WARREN, D. 1996. An abstract machine for computing the well-founded semantics. In *Proceedings of the Joint International Conference and Symposium on Logic Programming*, M. Maher, Ed. The MIT Press, 274–288.
- SIMONS, P., NIEMELÄ, I., AND SOININEN, T. 2002. Extending and implementing the stable model semantics. *Artificial Intelligence* 138, 1-2, 181–234.
- smodels. <http://www.tcs.hut.fi/Software/smodels>.
- SUBRAHMANIAN, V., NAU, D., AND VAGO, C. 1995. Wfs + branch and bound = stable models. *IEEE Transactions on Knowledge and Data Engineering* 7, 3, 362–377.
- VAN GELDER, A. 1993. The alternating fixpoint of logic programs with negation. *Journal of Computer and System Science* 47, 185–120.
- VAN GELDER, A., ROSS, K., AND SCHLIPE, J. S. 1991. The well-founded semantics for general logic programs. *Journal of the ACM* 38, 3, 620–650.
- WARD, J. AND SCHLIPE, J. 2003. Answer set programming with clause learning. In *Proceedings of the Seventh International Conference on Logic Programming and Nonmonotonic Reasoning (LPNMR'04)*, V. Lifschitz and I. Niemelä, Eds. Lecture Notes in Artificial Intelligence, vol. 2923. Springer-Verlag, 302–313.